




EDITION 2021 2022

www.vogel-germany.de

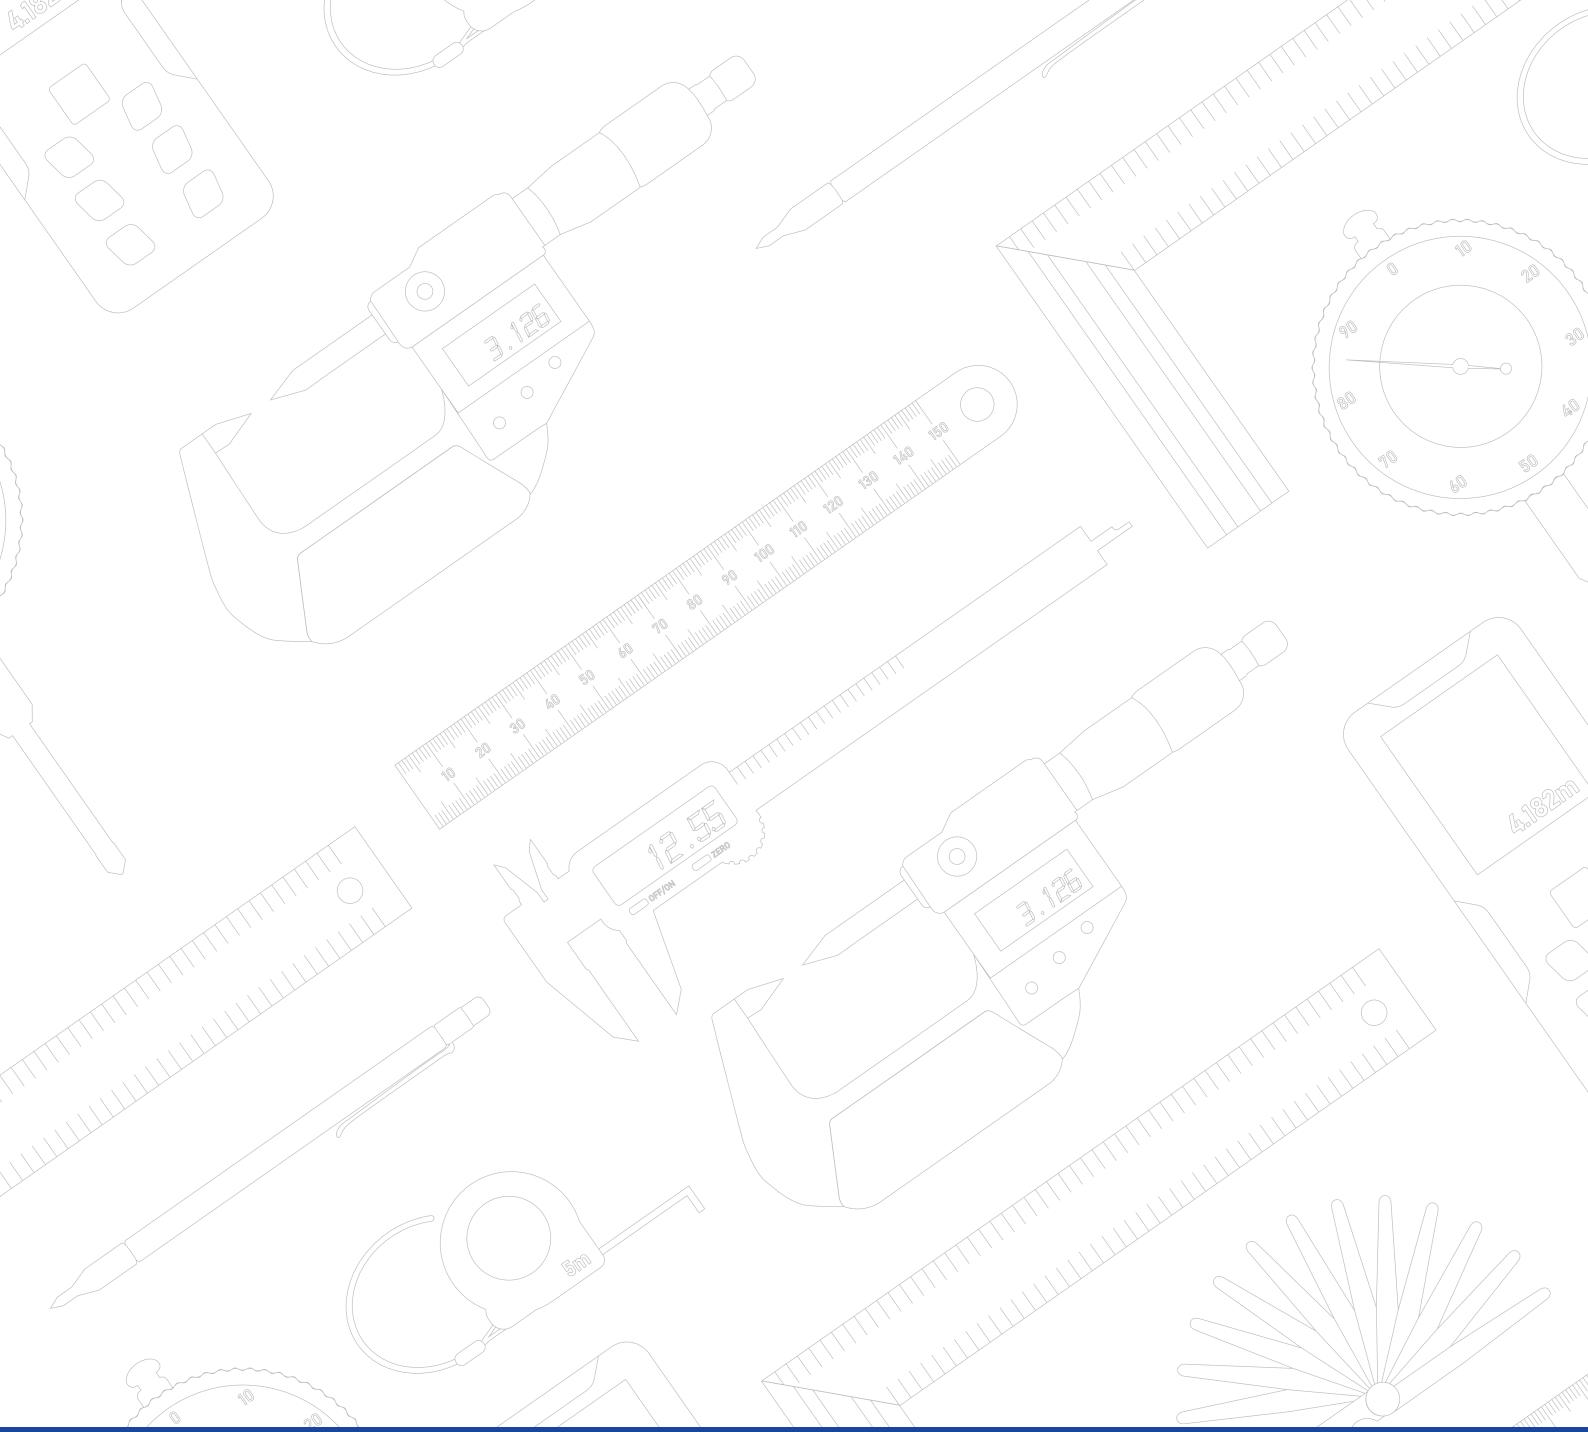

Our known sales, delivery and payment conditions apply exclusively.

All prices in this catalogue are understood, unless otherwise stated in the offer, ex warehouse, strictly net, plus statutory VAT, packaging, insurance and transportation costs.

© 2021 Vogel Germany GmbH & Co. KG

Any reprint, even in part, is only permitted with the permission of the publisher.

Vogel Germany GmbH & Co. KG is not liable for printing errors or incorrect representations in this catalogue, for the product descriptions, technical information and illustrations.

We reserve the right to make changes without prior notification.

The illustrations and descriptions correspond to the status at the time of printing this catalogue.

With this catalogue our previous sales documents lose their validity.



Welcome to the world of



Dear customers and business partners,

Although there is a very strong tendency towards a digital measuring tool catalogue, we nevertheless made a conscious decision to go for the more classic route of the „paper catalogue“. For us, the new 2021/2022 catalogue reflects our passion for measuring tools and provides a comprehensive overview of the diverse products, which is often not possible in the digital version in a hurry.

Take your time and leaf through our current catalogue in peace. Here you will find a large number of new products from the field of length measurement technology and material testing.

The experience that we have been able to gain during our more than 70 years of activity as a traditional manufacturer and our specialization in the field of precision measuring tools and gauges enable us to create individual solutions for our customers.

In our production of steel rules, we can implement lengths and scalings according to customer requirements, even if the steel rule is 20 meters or longer. You can find an extract of our steel rules starting with page 22.

We also offer you a quick and uncomplicated implementation of gauges for individual requested dimensions. These specific solutions cannot be shown in the catalogue and can be requested from our sales department. An overview of gauges can be found starting with page 232.

With our modern laser marking systems, we can still apply specific markings and labelling to the products according to customer requirements.

I would particularly like to recommend our own development of the MasterLine® length measuring system, which you will find on pages 40/41. This means that dimensions up to 3.0 m can be read and documented without parallax error. The corresponding camera is also available as an individual variant on page 42. It can also be used as a mobile variant with the help of the built-in scale of 3 – 0 – 3 mm on the display for numerous tests. The measuring system has an LED light unit with 4x white light and 4x UV/black light for many different applications.

With the recently implemented cooperation with the Saliger Gruppe, we offer a cross-industry and manufacturer-independent DAkkS-accredited calibration service. In addition to factory calibrations, DAkkS calibrations can also be offered for almost the entire range.

We are sure you will discover interesting innovations in the catalog.

We are pleased that you share our passion for our measuring tools and gauges with us!

I hope you enjoy leafing through the new catalogue.

With best regards from Kevelaer,

A handwritten signature in black ink, appearing to read "Stephan Rex".

Stephan Rex
Managing Director


FERVI - A strong partner

Vogel Germany has been part of the Italian group of companies Fervi SpA since April 1st, 2019, which is an established company in the field of MRO (Materials, Repair and Operations). Fervi stands out as a solid, reliable and competitive company that focuses on the manufacture and procurement of machines and tools for industry, workshops and the automotive sector.

According to Ri-Flex Abrasives S.R.L. - leading manufacturer of high-quality flap discs - and Sitges S.L. - long-standing sales partner of the Fervi brand on the Iberian Peninsula - Vogel Germany GmbH & Co. KG is now joining the Fervi Group.

This merger allows our customers and business partners to benefit from the expanded portfolio of products and services. From small orders to large projects, all inquiries are processed.

With all the strength of this group growing and helping others grow, Fervi is a strong and reliable partner. Vogel Germany can thus offer an improved range of products for its worldwide customers.

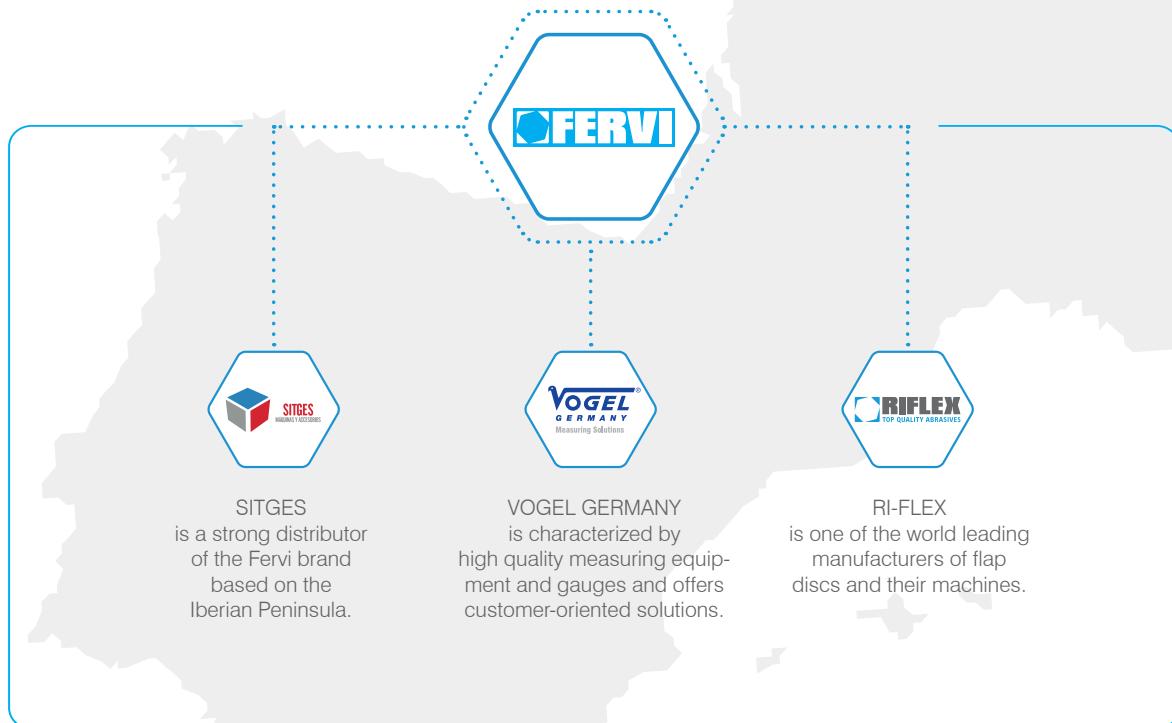



Fervi (Vignola, Italy)




Ri-Flex (Spilamberto, Italy)



Vogel Germany (Kevelaer, Germany)

About us

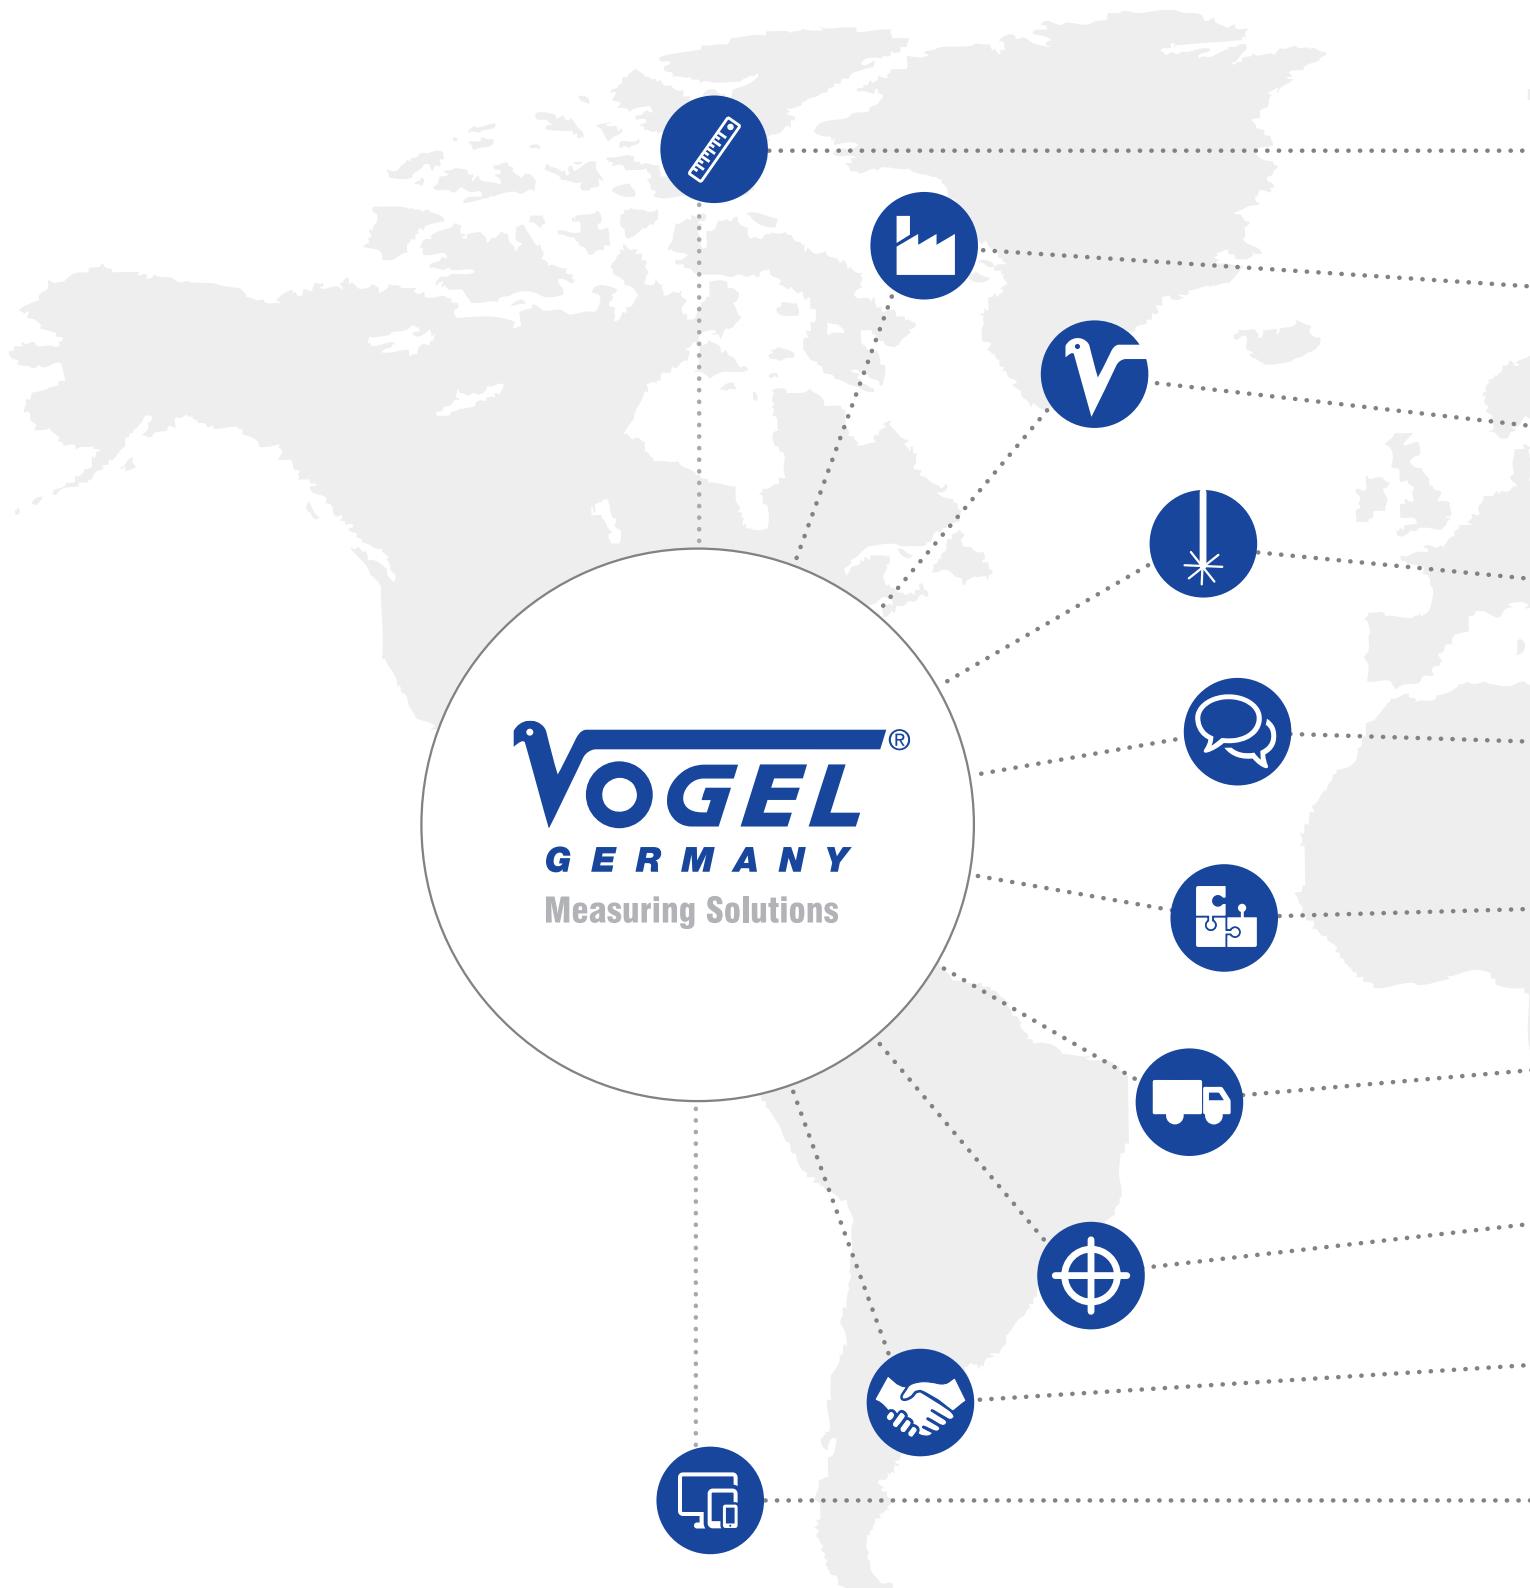

Product Range

You will find more than 4500 precision measuring tools e.g. for purposes of length measuring technology and material testing in our catalogue and online shop.

Production

In our own production we manufacture steel rules (from page 19), thickness gauge foils (page 235), bevel squares (page 223), mitre squares (page 223) or squares (page 221) - 100% Made in Germany.

Measuring Solutions

We constantly try to offer you the right solution. Custom-made products are welcome and our daily business.

Laser Engravings

We engrave special scales, trademarks, logos etc. according to your specifications on our measuring tools.

Support

Our technically experienced sales team is characterized by speed and flexibility. We are happy to visit you and demonstrate our services and measuring tools on site.

Suppliers

Thanks to long-term partnerships with our reliable suppliers, we can guarantee you the highest quality and availability of our products.

Shipping Service

Our articles are available from our warehouse in Kevelaer (Germany) and can be sent worldwide, whether to Europe, Asia, Africa, Australia or North and South America.

Calibration

You need a factory calibration or DAkkS calibration? We offer an uncomplicated calibration service for almost the entire product range. When ordering, please indicate which calibration you require.

Stability

Thanks to the backing of our strong parent company Fervi, we can be there for you and support you even in difficult times. Trust is a principle of our business.

Digital Media

Current information on new products, trade fairs and offers can be found on our website and on Facebook. A current digital version of the catalogue is available as well.







a strong partnership

Vogel Germany and the Saliger-Gruppe have agreed on a far-reaching cooperation in the procurement and calibration of measuring equipment. With the new orientation, Vogel Germany is strengthening its offer of having measuring equipment tested in an independent calibration laboratory. The Saliger-Gruppe offers a cross-industry and manufacturer-independent DAkkS-accredited calibration service. In addition to factory calibrations, DAkkS calibrations can now also be offered for the almost complete range of Vogel Germany.

In order to be able to offer its customers an accelerated and simplified process flow, Vogel Germany has chosen this further route of combining calibration service with the procurement of new measuring equipment. In cooperation with the Saliger-Gruppe, the procurement of measuring equipment for the customers of the Saliger-Gruppe is taken over by Vogel Germany.

Stephan Rex, Managing Director of Vogel Germany: "We are pleased to have found a new partner in the Saliger-Gruppe. The focus of the cooperation is an improved service for all aspects of measuring equipment. This will be reflected above all by a strong simplification in the complex procurement of measuring equipment and its calibration for the customer, as this service is available from a single source now. The Saliger-Gruppe offers a variety of calibration options that Vogel Germany has not been able to offer to this extent before."

Ulrich Saliger, Managing Director of the Saliger-Gruppe: "Looking for a way to redesign our Saliger measuring equipment sales department, we are happy to have entered into close cooperation with Vogel Germany. In times of increased demands on the calibration business, our main concern is to be able to continue to offer our customers a comprehensive range of services. The cooperation with Vogel Germany enables us to concentrate on our core competencies and at the same time to expand the product portfolio for our customers."

Inquiries can now be submitted to your usual contact person or by email to info@vogel-germany.de or by telephone on +49 2832 9239-0.



Our certified QM-System is constantly controlled and improved by internal and external Audits of TÜV Rheinland.



Calibration certificates for our products on request, please!

CC

Workshop Calibration Certificate in german or english language, acc. to DIN/ISO etc.

Scope:

Calibration certificate indicating the deviation and limits of normal and with the test curve(s) for the measured according to the criteria of standards, confirmation of their performance. Confirmation of traceability to national normal, indicating an identification number.

Validity:

Individually for each single instrument/device. Period of validity in accordance with your quality management manual (usually 12 month)

Price:

See our price list, prices valid only for initial delivery from the factory, price for re-calibration on request, please.

DAkkS

Calibration test report by an accredited testing laboratory

Scope:

As mentioned above, calibration test report as mentioned above, but accredited by testing laboratory.

Validity:

Individually for each single instrument/device. Period of validity in accordance with your quality management manual (usually 12 month)

Price:

See our price list, prices valid only for initial delivery from the factory, price for re-calibration on request, please.

Explanations

In our catalogue you will find several pictograms beside the text description.
They should be helpful for a quick and easier explanation of the articles and their attributes.

Norms, accuracy-classes, regulations		Several Icons	
I	Article fulfills the standard of the tolerance class I		Article-Number
II	Article fulfills the standard of the tolerance class II		Reading / Resolution
III	Article fulfills the standard of the tolerance class III		Cross section of the article
E1	Article fulfills the respective verification standard		Max. total accuracy(\pm)
CC	Workshop calibration certificate, inclusive		Repeatability (\pm)
CE	Article with CE classification		Individual measuring range
MID CODE	Directive of the European Parliament and of the council on measuring instruments		Article dimension
T2	Article with strengths tolerances acc. to DIN 2275		Measuring- and weighing-unit selectable or switchable
T3	Article with strengths tolerances acc. to DIN 2275		Optical tolerance signal
ASTM	Article fulfills the respective American standard		Corresponding battery included
ANSI	Article fulfills the respective American standard		Corresponding cell battery included
BS	Article fulfills the respective British standard		Corresponding cell battery included
JIS K	Article fulfills the respective Japanese standard		Corresponding lithium battery included
DIN	Article fulfills the respective DIN standard		Corresponding lithium battery included
DIN EN	Article fulfills the respective DIN EN standard		Corresponding lithium battery included
ISO	Article fulfills the respective ISO standard		Accu
DIN ISO	Article fulfills the respective DIN ISO standard		Power supply
NORM	Article manufactured acc. to tolerances of workshop standard		Laser protection class
TÜV GS	Article with seal: "TÜV/Geprüfte Sicherheit (GS)"		Magnet power
VdTÜV	Article with seal: "TÜV"		Induction
IEC / EN	Article fulfills the respective norm standard		Laser wavelength
			Shock proof
			Stand out
			Reading in mm and inch
			Reading in cm and inch
			Article with ABS/INC measuring system
			Article with ABSOLUTE measuring function
			Warranty 1, 2 or 3 years

Protection (IP class) acc. to DIN 40050 / IEC 60529 etc.

	Protected against solid particles Ø > 1 mm
	Splash water resistant
	Drop water resistant
	Drop water resistant
	Dust and spray water resistant
	Dust and spray water resistant
	Dust and jet water resistant
	Water and oil resistant (at times)
	Article is explosion proof
	Article with UL-certificate (american safety norm)

Product specifications

	Caliper jaw length
	Measuring internal dimension
	Caliper jaws (cross shape)
	Caliper jaws (knife shape)
	Depth Gauge
	Fine adjustment
	Thread pitch
	Measuring inside
	Measuring outside
	Pointer rotation
	Setting gauge

Manufacturing process

	Article with laser engraved scale / graduation
	Article with etched scale / graduation
	Article with printed scale / graduation (Pad print)
	Hardened
	Carbide measuring faces
	Stainless steel

Icons for data process

	RS232 data output by data cable
	Opto RS232 data output
	Proximity data output, inductive, contactless
	Data output by USB and data cable
	Data output by USB and Mini USB (compatible with Mitutoyo Digimatic)
	wireless communication (WiFi / WLAN) possible
	wireless communication via Bluetooth® possible
	Software on CD-Rom
	Setting the absolute zero point

Prices and delivery

	We charge transport and packing costs
	Certificate inclusive (no additional costs)

Navigation

Find it even better now


Dear customers and business partners,

With this edition of our catalogue we have implemented some innovations.
We attached great importance to findability and logical structuring.

We have reorganized our entire range so that you can find the items you want even faster.

All articles are divided into 8 newly created categories.
These categories have been renamed and illustrated with distinctive and meaningful icons.

Our categories

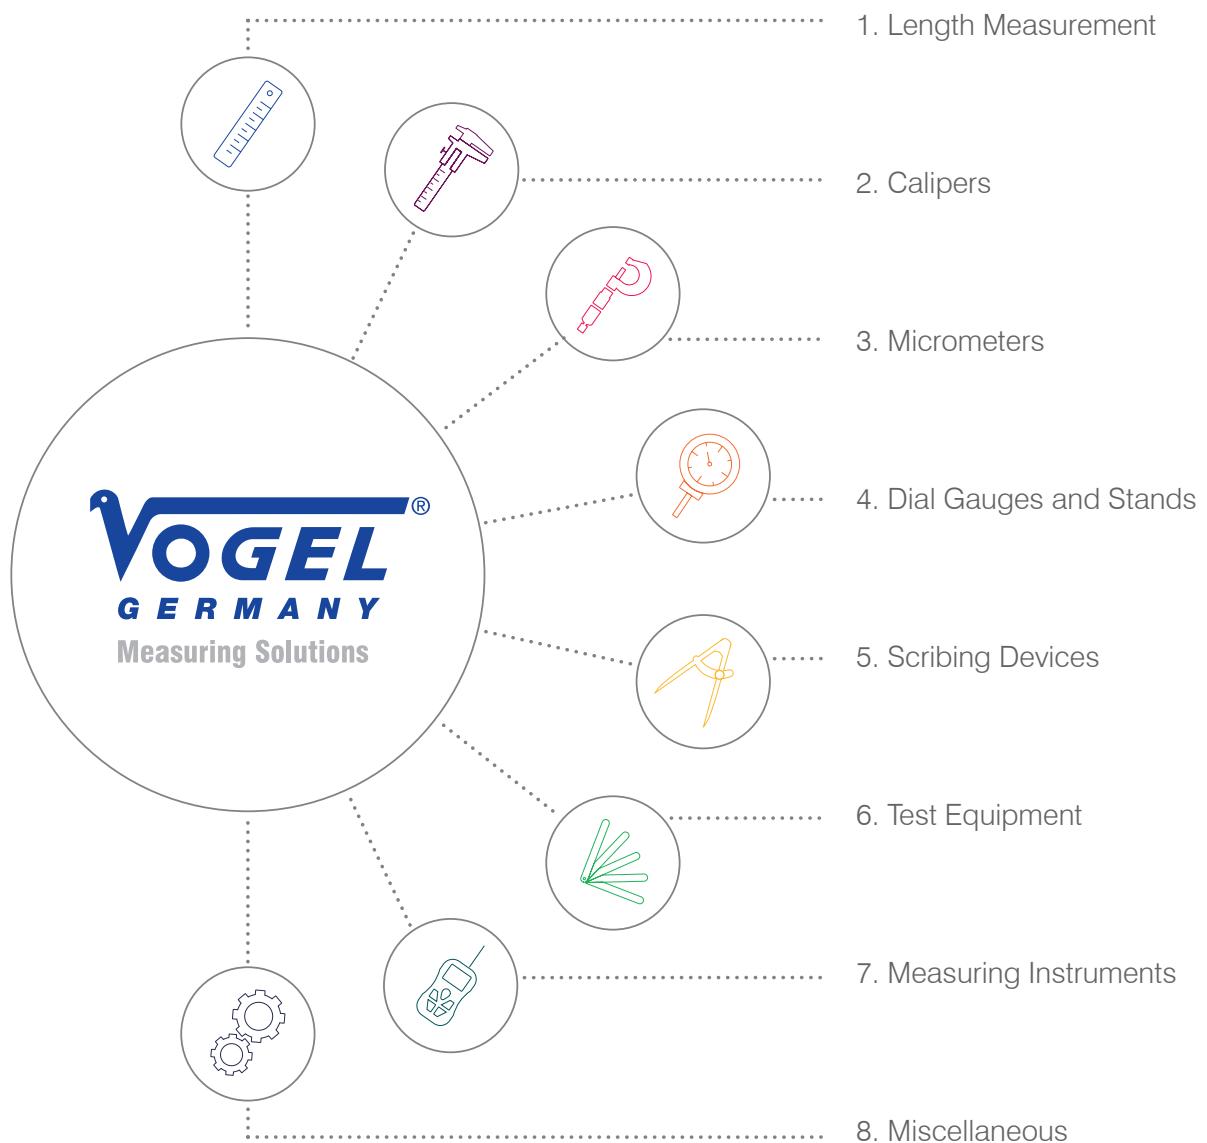

Length Measurement

- Flexible Steel Rules • Stainless Steel Rules • Double Side Steel Rules • Steel Rules with Laser Engraving • Steel Rules with etched or laser graduation
- Steel Rules black • Steel Rules with magnetic inserts • Stainless Steel Rules with stop hook 90° • Steel Rules with a central zero point
- Circumference Measuring Tapes • Precision assembly Rules • Straight Edges • Precision graduated Straight Edge • Straight Edges with bevel
- Digital Distance and Positioning Measurement Systems • Digital Measuring Magnifiers • Electr. Digital Scale • Electr. Digital Measuring Wheels
- Steel Measuring tapes • Wood folding rules • Pocket Measuring Tapes • Digital Measuring Tapes • Pocket Measuring Tape with Laser Distance Meter
- Laser Distance Meter • Measuring Tapes in light metal angled frames • Measuring tapes in a light metal triangle frame
- Measuring Tapes in a flat capsule • Tank Tapes

Page 18 – 51

Length Measurement



Calipers

- Ultra-light Caliper • Electr. Digital Caliper • Electr. Digital pointed Caliper • Electr. Digital splines Caliper • Electr. Digital special Caliper
- Measuring Bridge • Precision Pocket Vernier Caliper • Dial Caliper • Small Pocket Vernier Caliper • Electr. Digital Workshop Calipers
- Workshop Calipers • Digital Caliper for Inside and Outside Grooves • Groove Caliper • Electr. Digital Brake Disc Calipers • Brake Disc Calipers
- Brake Drum Caliper • Electr. Digital Gear Teeth Caliper • Brass Button Gauge • Electr. Digital Tread Depth Gauge • Electr. Digital Depth Caliper
- Depth Caliper • Measuring Tool Sets

Page 52 – 85

Calipers



Micrometers

- External Micrometer • Electr. Digital Micrometer • Dial Indicator • Precision External Micrometer • Counter Micrometers • Disc Type Micrometer
- V-Anvil Micrometer • Wire Thickness Micrometer • Micrometer for external threads • Thread Flanks Measuring Inserts • Measuring Ball Holder
- Measuring Pressure Test Gauge • Optical Parallels • Setting Gauges for Micrometer • Thread Setting Gauges • Micrometer Stand
- Electr. Digital Micrometer Heads • Micrometer Heads • Precision Depth Gauge • Electr. Digital Depth Gauge • Electr. Digital Inside Micrometers
- Stand for Micro Gauge • Electr. Digital 3-point internal Micrometers • Electr. Digital 3-Point Pistol Grip Bore Gauge
- Electr. Digital 2-Point Bore Gauge Sets • Extensions rods for 3-Point Bore Micrometers • Telescopic Gauges • Bore Gauge Set with Dial Indicator
- Extension for Bore Gauges • Saw Teeth Setting Dial Indicator • Thickness Gauge • Thickness Gauges with Wheels • Foil Thickness Gauge
- Quicktest "Pocotest" • Electr. Digital Quicktest • Quicktest • Electr. Digital External Quicktest • Electr. Digital Internal Quicktest

Page 86 – 143

Micrometers



Dial Gauges and Stands

- Electr. Digital Dial Indicators • Electr. Digital small Dial Indicator • Small Dial Indicator • Dial Indicator • Precision Dial Indicators
- Spindle Lifting Lever • Lifting Devise • Extensions • Measuring Bridge for Depth measurements • Inside Test Indicator • Angle Test Indicators
- Centering Holder • Clamp Holder • Clamping Shaft • Electr. Digital Test Indicator • Crankshaft Test Instruments • Electr. Digital Zero Setting Device
- Centering Indicator • Edge Finder • 3-D Probe with dial Indicator • Universal Magnetic Measuring Stands
- Universal Magnetic Measuring Stands with Ball Joint • Measuring Stand with Vacuum-Base • Magnetic Base • Vacuum Base
- Measuring Stand Columns • Wooden Box for Measuring Stands • Precision Measuring Tables

Page 144 – 189

Dial Gauges and Stands



Scribing Devices

- Spring Divider • Internal and External Spring Joint Compass • Divider and Divider with Setting Wing • Internal and External Joint Compass
- Trammel • Precision In- and Outside Caliper • Compass Vernier Calipers • Electr. Digital Universal Protractor Set • Universal Bevel Protractor
- Protractor • Electr. Digital Protractor • Marking Gauge • Universal Marking Gauge • T-Marking Vernier Caliper • Metal Etching Pens
- Steel Scribes • Parallel-V-Block-Pairs • Prism Pair • Adjustable Angle Prism • Magnetic Measuring and clamping V-Block • Prism Lamellar Block
- V-Block with Clamp • Wooden Box • Granite Measuring Cubes • Electr. Digital Height and Marking Gauges • Parallel Surface Gauge
- Precision Inspection Square • Precision Workshop Square • Precision Bevel Edge Square • Precision Knife Straight Edge
- Square with Inside Bevelled Edge • Workshop Square • Mechanic Square • Flange Square • Carpenter's Squares • Universal Square
- Combination Square-Set • Center Square • Bevel Square • Mitre Square • Hex and octagonal Angles Square • Acute Angle Square
- Bevel Square

Page 190 – 225

Scribing Devices



Test Equipment

- Precision Feeler Gauges Sets • Feeler Gauges Set made from brass • Valve Regulation Gauge Set • Piston Feeler Gauges Set • Thickness Gauge Foils
- Screw Pitch Gauge • Radius Gauges • Angle Gauge • Angle Thread Cutting Gauge • Trapez Thread Cutting Gauge • Combined Turning and Thread Cutting Gauge
- ACME Thread Cutting Gauge • Lathe Tool Gauge • Twist Drill Grinding Gauge • Universal Twist Drill Grinding Gauge • Jet Gauge • Taper Gauge • Hole Gauge
- Electr. Digital Arc Test Set • Electr. Digital Keyways caliper • Spring Gauge • Precision Welding Gauge • Electr. Digital Welding Gauge • Welding Gauge „S“
- Pipe Welding Gauge / Edge Offset Gauge • Measuring Tool Set • Profil Gauge • Limit Plug Gauges • Setting Ring Gauges • „Go“ Thread Ring Gauge
- „No-Go“ Thread Ring Gauge • Limit Thread Plug Gauges • Cylindrical Measuring Pins • Pin Holder • Parallel Gauge Blocks • Optical Parallels
- Inspection Gauge Block Set for Micrometers • Inspection Gauge Block Set for Calipers • Angle Gauge Block Set • Accessory Set for Gauge Blocks
- Gauge Connector • Measuring Jaws in Pair • Centering Point • Maintenance Kit for Gauge Block • Maintenance Spray
- Universal Comparative Measuring Instrument • Granite Measuring and Control Plate • Safety-Stand • Levelling Jack • Tailstock Pairs
- Granite Master Aquareas 90° • Precision Gauge Blocks • Precision Pair of Parallels • Maintenance Set for Granite Plates • Straightening Plates • Stands
- Lapping and Control Plate • Control-, Surface- and Testing Plates • Supporting Feet • Angel Plates • Precision Inspection Spirit Levels
- Precision Inspection Frame Spirit Levels • Precision Crank Pin Levels • Precision Alloy Spirit Level • Precision Parallel Support Sets

Page 226 – 273

Test Equipment



Measuring Instruments

- Hardness Testers • Universal Digital Rebound Tester • Hardness Reference Blocks • Analogous Hardness Tester • Test Stand for Hardness Tester
- Test Blocks • Impact Devices for Special Applications • Universal Coating Thickness Gauges • Universal Paint Thickness Gauge
- Ultrasonic Thickness Gauges • Ultrasonic Thickness Gauges • Ultrasonic Thickness Gauges with Echo-Echo System
- Electr. Digital Vibration Meters • Electr. Digital Hand Tachometers • Electr. Digital Stroboscopes • Electr. Digital Force Gauges
- Electr. Digital Compact Scale • Electr. Digital Precision Scales • Electr. Digital Parcel Platform Scale • Electr. Digital Industrial Counting Scales
- Electr. Digital Hanging Scale • Electr. Digital Crane Scale • Test Weights • Voltage Detector • Electr. Digital Miniature Current Clamp
- Two Pole Voltage Tester • Electr. Digital Multimeter • Magnet Field Detector • Brake Fluid Tester • Car Tester • Electr. Digital Thermometer
- Temperature Probe • Infrared Laser-Thermometer • Electr. Digital Moisture Meter • Electr. Digital Sound Level Meter • Electr. Digital Luxmeter
- Electr. Digital Anemometer • Elektr. Digital Surface Roughness Measuring Devices • Surface Finish Specimen • Image/Video Borescope Console
- Image/Video Borescope Hoses

Page 274 – 313

Measuring Instruments



Miscellaneous

- Electr. Digital Angle Measurer Spirit Level • Electr. Digital Alloy Spirit Level • Electr. Digital Light Alloy Spirit Level • Marking Ink • Dressing Paste
- Special Cleaner • Electr. Digital Angle-Sensor • Electr. Digital Protractor • Electr. Digital Stopwatch • LED Handheld Magnifier
- Precision Technical Magnifier • Watchmaker Magnifier and Stone Magnifier • Technical Stand Magnifier • Line Tester • Precision Folding Magnifier
- Magnifier with LED Lamp • Head-Wearing Magnifier • Professional LED Illuminated Magnifier • Inspection Tool Kit • Magnetic Tray
- Magnet Lifter • Electr. Digital Tire Pressure Gauge • Professional Inspection Mirror • Stroke Counter • Mechanical Manual Piece Counter
- Length Counter • Measuring Wheel • Data Cable and Accessories for Electr. Digital Measuring Devices • Interface Box • Keyboard Interface
- Electr. Digital LCD Display • Data Processing System • Measurement Data Transmission System • Batteries • LED Work Lamp
- Hand Held Refractometer

Page 314 – 339

Miscellaneous



Explanations • DIN standards and EC classifications

Advantages of our Stainless Steel Rules

✓ We use very high quality German steel from steel plants

- steel code 1.4310
- due to the high chromium content has this steel best stainless steel attributes

✓ Our stainless steel rules are permitted in food industry and medical technology

- because we only use high quality steel (1.4310)
- because we have a special process for scaling / marking (etching technology)

Our etching technology does not require aggressive acids and no toxic paints.

Our environmental friendly etching technology is developed in 1993 by our own engineers.

For this reason we do have the permission to supply our stainless steel rules to the food industry and medical technology.

Other steel rule standards are not approved for these field in Europe.

Many manufacturers etch the scales and steel rules with aggressive acid. Afterwards the graduation is colored with toxic paint (mainly in black and red). But the color may be dissolved slowly in liquids.

That means these steel rules are not permitted in the tank construction and boiler industry: not for the drinks-, food industry and not for medical technology at all.

✓ Unique in the world:

Lengths from 4-16 meter in one piece, with high repeatability, acc. to workshop standard

- due to our unique production process we can provide you with extra ordinary lengths, with a high grade of repeatability

✓ Production of special-scales

- we offer interesting special scales for e.g. mechanical engineering, shipbuilding, container, tank- and boiler construction
- scales as desired, e.g. reading from bottom to top or from top to bottom
- scales according to your specifications and drawings

✓ Accuracy of our steel rules and scales

- We manufacture according to tolerance classes I and II (similar to MID 2014/32 / EU), or acc. to workshop grade

✓ Calibration Certificates on request

Any questions?
We are pleased to advise!

Factory standard

total length graduation in ± mm	500	1000	1500	2000	3000	4000
permitted tolerance in ± mm	0.80	0.80	1.20	1.20	2.0	2.0

tolerances according to accuracy class I

total length graduation in ± mm	500	1000	1500	2000	3000	4000
permitted tolerance in ± mm	0.15	0.20	0.25	0.30	0.40	0.50

tolerances according to accuracy class II

total length graduation in ± mm	500	1000	1500	2000	3000	4000
permitted tolerance in ± mm	0.40	0.50	0.60	0.70	0.90	1.10
Accuracy class II according to DIN 2014/32 / EU (MID)	0.70	0.70	0.90	0.90	1.10	1.30

tolerances according to British Standard (BS 4372:1968)

total length graduation in ± mm	150	300	500	1000
permitted tolerance in ± mm	0.10	0.10	0.20	0.25

Explanations • DIN standards and EC classifications

Flat and assembly rules made of aluminium and steel

Aluminium rulers are particularly light and handy compared to steel rulers. Our aluminium rulers get their particularly high wear resistance and corrosion resistance through the special hard coating.

✓ Coat properties


- Coat thickness approx. 50μ
- Hardness 500 – 55HV
- High electrical insulation / $4 \times 1015 \text{ W mm}^2/\text{m}$
- Minor thermal conductivity
- Good sliding property

✓ Flatness tolerances for straightedges according to DIN 874

The formulas given in the basic form the basis for the calculation of the flatness tolerances. (Rounded tolerances)

The sketch below shows the optimal support points for storage. Please note that the tolerances specified according to DIN are only valid if the support points are met. Double values apply for the parallelism of the measuring surfaces to one another.


 a = mm	GG 0 (2+a/100) μ	GG 1 (4+a/60) μ	GG 2 (8+a/40) μ
300	5	—	—
500	7	12	21
750	9,5	17	27
1000	12	21	33
1500	17	29	46
2000	22	37	58
2500	27	46	71
3000	32	54	83
4000	42	71	108
5000	52	87	133
6000	62	104	158

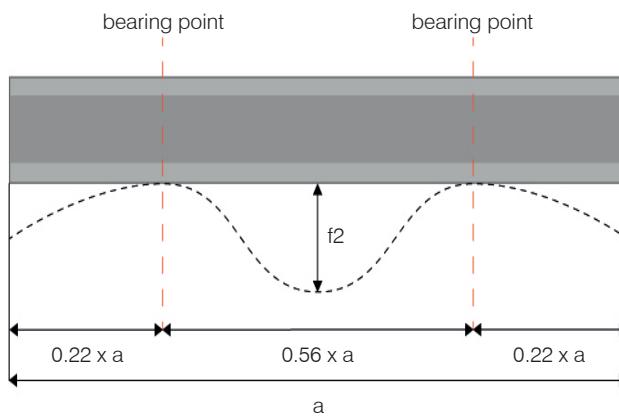

✓ Length tolerances

Length tolerances of folding rules, measuring tapes and roller tapes, are as per EC accuracy class

 a = mm	0.5	1	2	3	5	10	15	20	25	30	50
EC I / mm	0.2	0.2	0.3	0.4	0.6	1.1	1.6	2.1	2.6	3.1	5.1
EC II / mm	0.5	0.5	0.7	0.9	1.3	2.3	3.3	4.3	5.3	6.3	10.3
EC III / mm	1.0	1.0	1.4	1.8	2.6	4.6	6.6	8.6	10.6	12.6	20.6

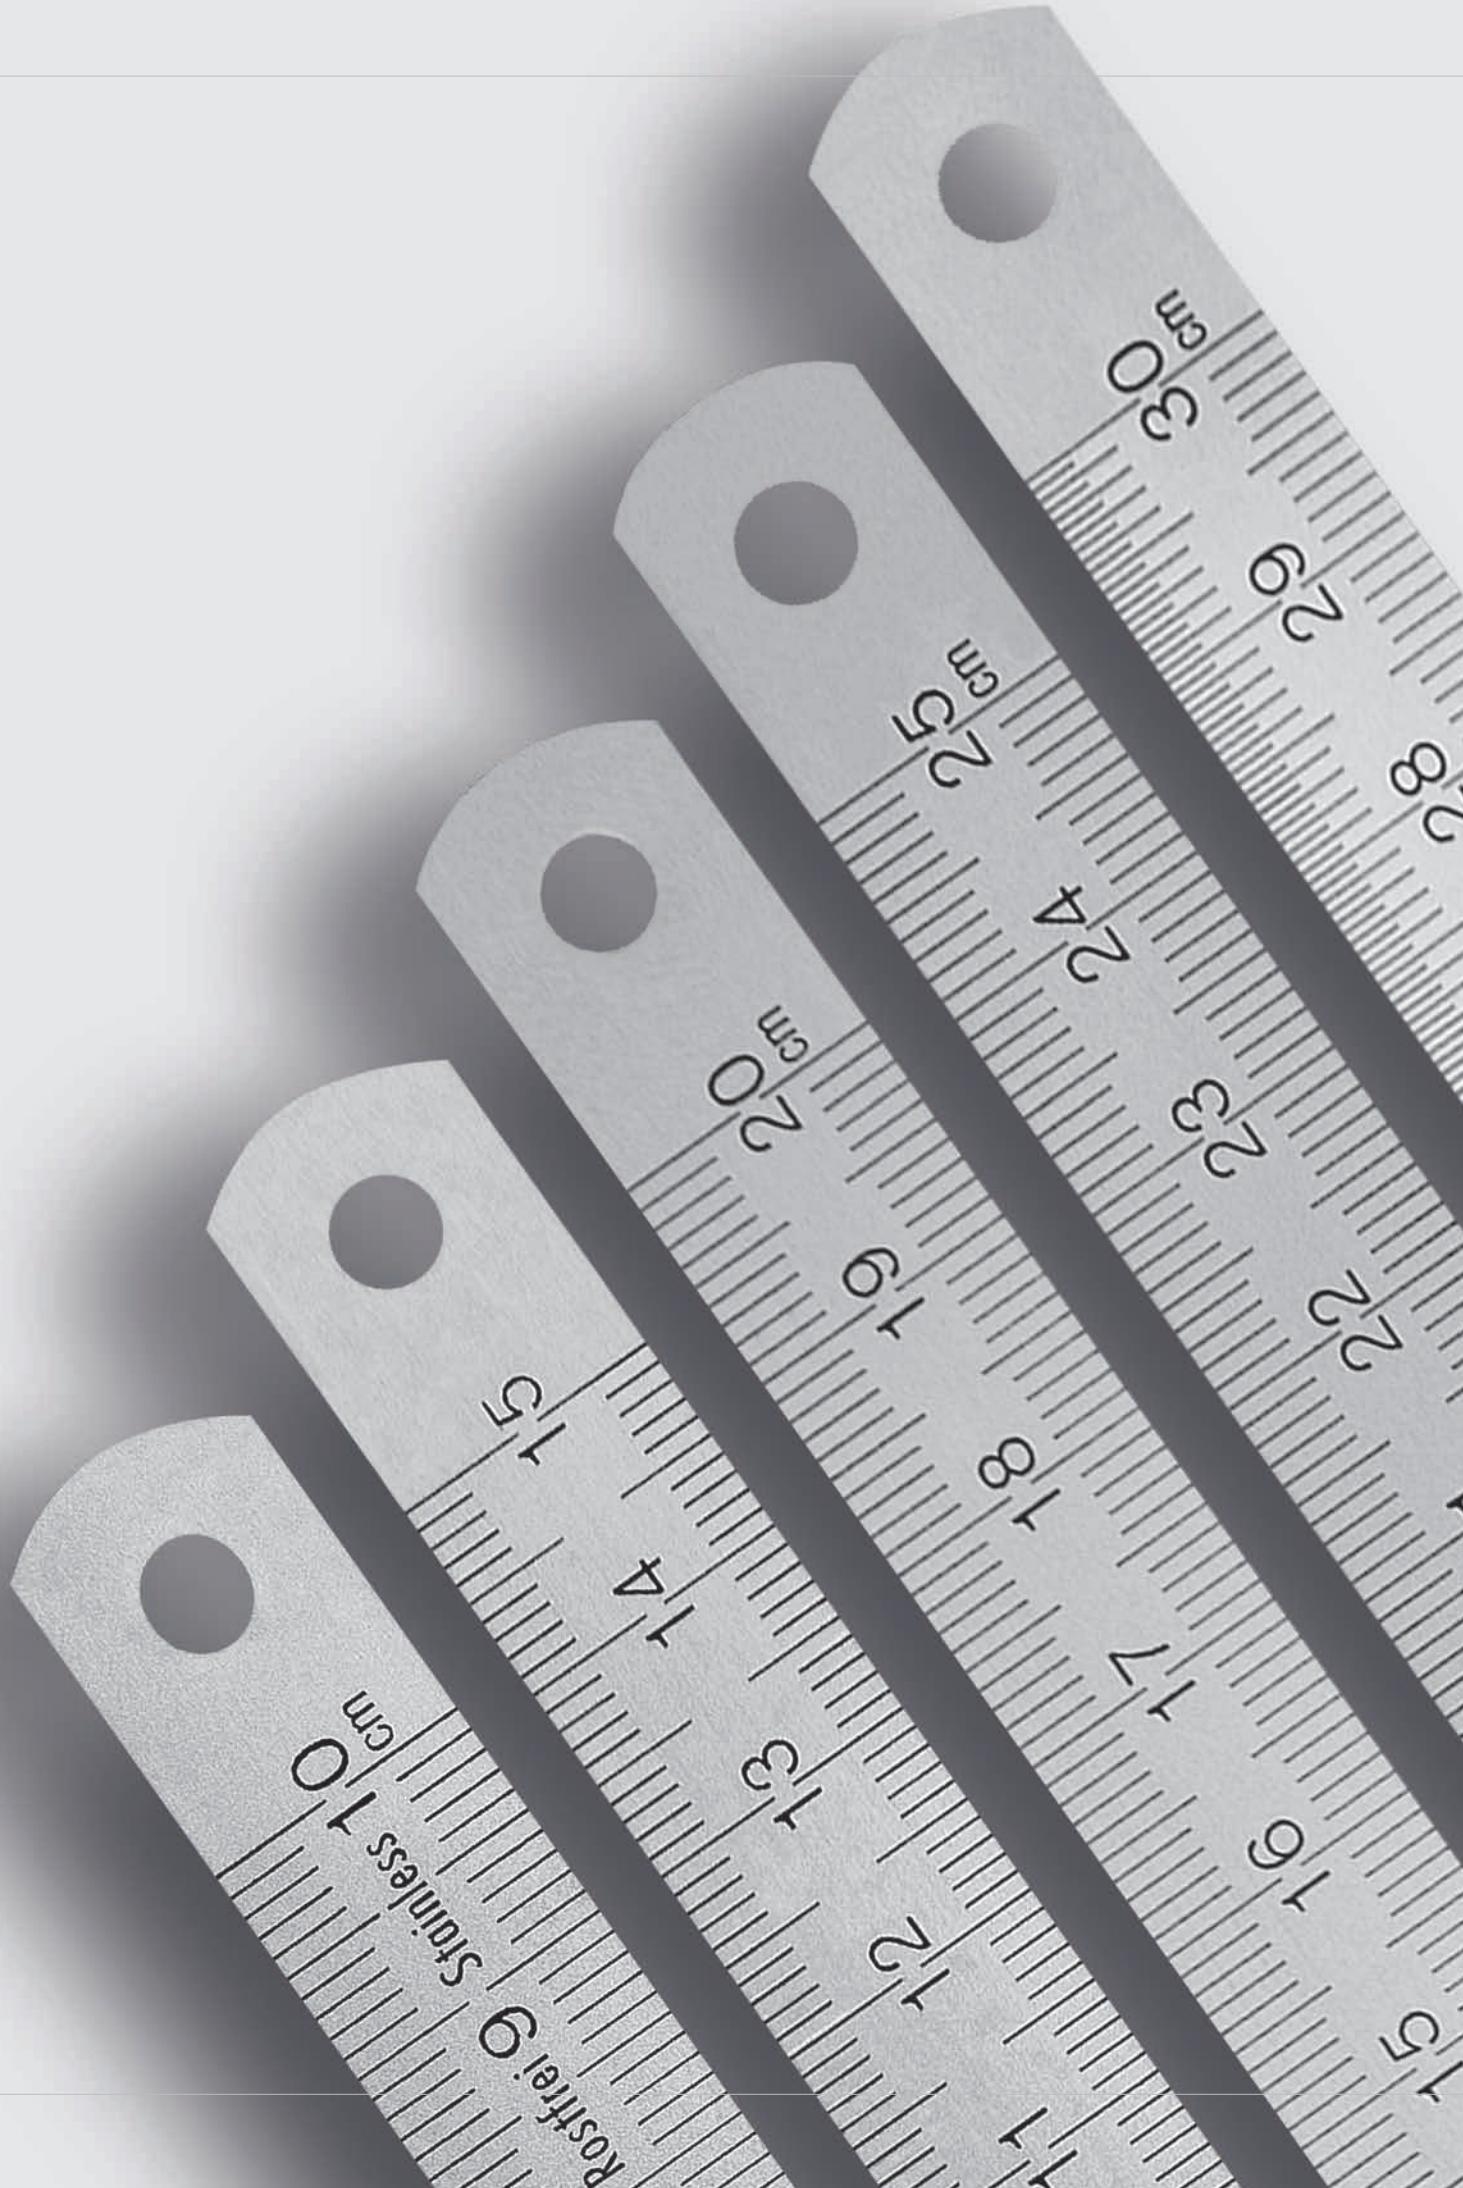

Length Measurement



Flexible Steel Rules	22 – 23
Stainless Steel Rules, with etched graduation.....	24 – 25
Stainless Steel Rules, matt surface.....	26
Stainless Steel Rules, lasered graduation	27
Stainless Steel Rules, according to MID, etched.....	28
Stainless Steel Rules, according to MID, lasered	28
Steel Rules, black.....	29
Stainless Steel Rules, with magnetic inserts.....	29
Stainless Steel Rules, with conversion table.....	30
Stainless Steel Rules, with stop hook 90°	30
Rules in Special Design	31 – 32
Circumference Measuring Tapes	33
Assembly Rules.....	34
Straight Edges.....	35 – 36
Precision Graduated Straight Edges	37
Straight Edges with bevel.....	38
Digital Distance and Positioning Measurement Systems	40 – 41
Digital Measuring Magnifiers	42
Electr. Digital Scales • IP67	43
Electr. Digital Measuring Wheels • IP51	44
Wood Folding Rules.....	45
Pocket Measuring Tapes.....	46
Digital Measuring Tapes.....	47
Laser Distance Meter	48
Measuring Tapes in light metal angled frames	49
Measuring Tapes in a flat capsule.....	50
Tank Tapes, stainless steel.....	51

Image Directory • Length Measurement

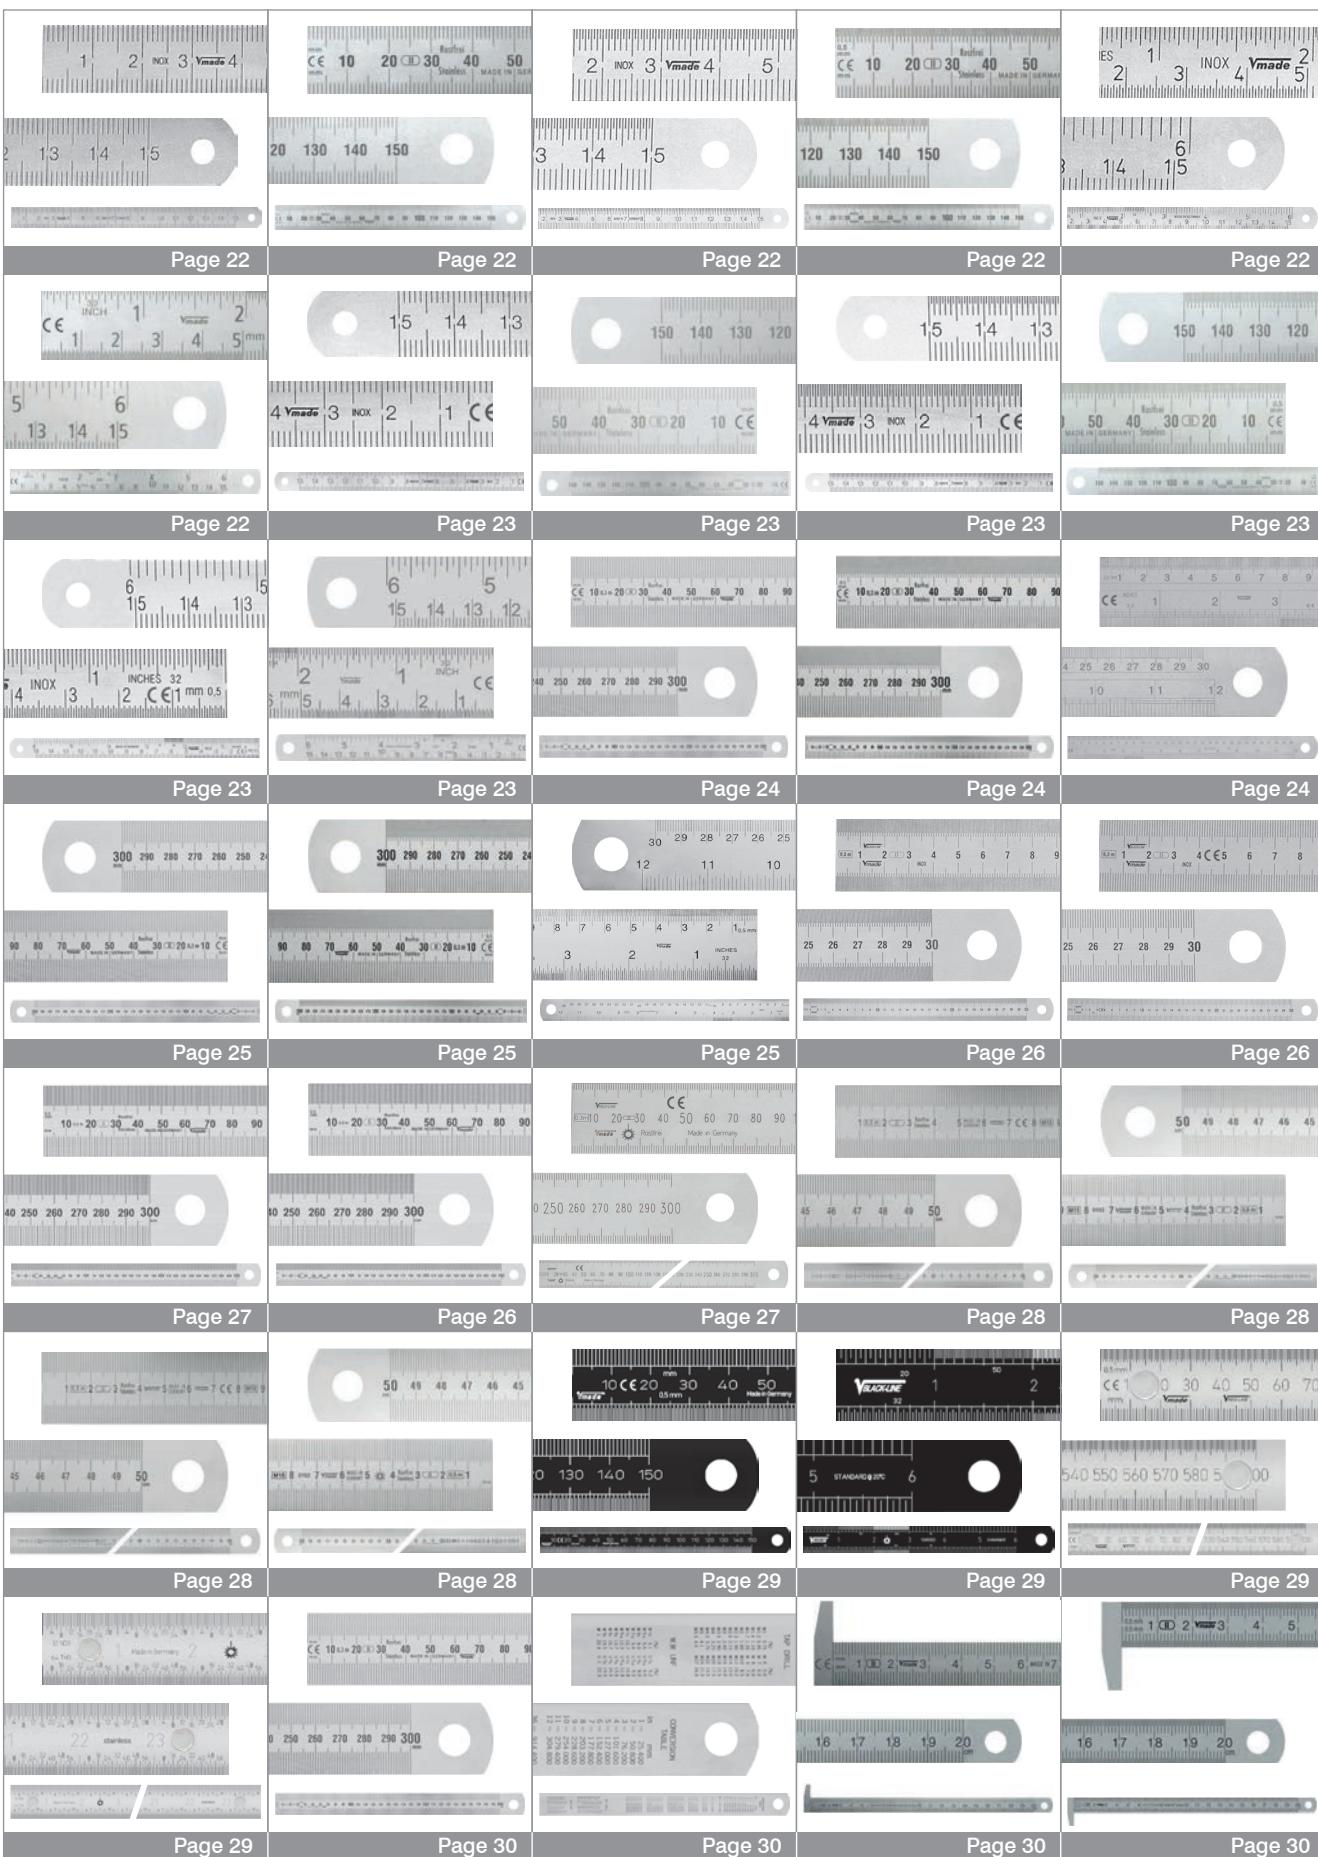


Image Directory • Length Measurement

			<img alt="A long measuring tape from page 3	

Rules

Flexible Steel Rules

acc. to tolerance class II

• reading from left to right

- flexible version, small section
- stainless spring steel
- non glare, matt surface
- etched graduation for a clear reading
- CE classification at type A and type B

type A = mm / mm top and bottom 1/1 mm graduation


type B = ½ mm / mm top ½ mm and bottom 1/1 mm graduation

type C = inch / mm top 1/64 ; 1/32 and 1/16 inch graduation,
bottom ½ mm and 1/1 mm,

type A



ART No 1010010015



ART No 1012010015

type B



ART No 1010020015



ART No 1012020015

type C



ART No 1010030015



ART No 1012030015

Numbering up to 500 mm length with continuing mm numbering at type A and type B.

With a cross section of 13 x 0.5 with cm numbering.

The rules from 1000 mm up to 4000 mm length with continuing cm numbering at type A and type B.

The rules up to 4000 mm length according to tolerance class II are qualified as reference pieces.

Therefore please order our calibration certificate together with the rule.

Steel Rules more than 4000 mm length are made according to workshop standard.

DIN

CE

II

INOX

CC

ART No					
Typ A	Typ B	Typ C	mm		
1010010010	1010020010	1010030010	100	13 x 0.5	on request
1010010015	1010020015	1010030015	150	13 x 0.5	on request
1010010020	1010020020	1010030020	200	13 x 0.5	on request
1010010025	1010020025	1010030025	250	13 x 0.5	on request
1010010030	1010020030	1010030030	300	13 x 0.5	on request
1010010035	—	—	350	13 x 0.5	on request
1010010040	—	—	400	13 x 0.5	on request
1010010050	—	—	500	13 x 0.5	on request
1012010015	1012020015	1012030015	150	18 x 0.5	on request
1012010030	1012020030	1012030030	300	18 x 0.5	on request
1012010040	1012020040	1012030040	400	18 x 0.5	on request
1012010050	1012020050	1012030050	500	18 x 0.5	on request
1012010060	—	—	600	18 x 0.5	on request
1012010080	—	—	800	18 x 0.5	on request
1012010100	1012020100	1012030100	1000	18 x 0.5	on request
1012010150	1012020150	1012030150	1500	18 x 0.5	on request
1012010200	1012020200	1012030200	2000	18 x 0.5	on request
1012010250	1012020250	1012030250	2500	18 x 0.5	on request
1012010300	1012020300	1012030300	3000	18 x 0.5	on request
1012010350	1012020350	1012030350	3500	18 x 0.5	on request
1012010400	1012020400	1012030400	4000	18 x 0.5	on request
1012010500	1012020500	—	5000	18 x 0.5	on request
1012010600	1012020600	—	6000	18 x 0.5	on request
1016010030	—	—	300	20 x 1.0	on request
1016010050	1016020050	1016030050	500	20 x 1.0	on request
1016010100	1016020100	1016030100	1000	20 x 1.0	on request
1016010150	1016020150	1016030150	1500	20 x 1.0	on request
1016010200	1016020200	1016030200	2000	20 x 1.0	on request
1016010250	1016020250	1016030250	2500	20 x 1.0	on request
1016010300	1016020300	1016030300	3000	20 x 1.0	on request
1016010350	1016020350	1016030350	3500	20 x 1.0	on request
1016010400	1016020400	1016030400	4000	20 x 1.0	on request
1016010500	1016020500	—	5000	20 x 1.0	on request
1016010600	1016020600	—	6000	20 x 1.0	on request

Flexible Steel Rules

acc. to tolerance class II

- reading from right to left


- flexible version, cross section
- stainless spring steel
- non glare, matt surface
- etched graduation for a clear reading

type A



ART N° 1011010015

type B



ART N° 1013010015

type C



ART N° 1011020015



ART N° 1013020030

type C



ART N° 1011030015



ART N° 1013030015

type A = mm / mm top and bottom 1/1 mm graduation

type B = 1/2 mm / mm top 1/2 mm and bottom 1/1 mm graduation

type C = inch / mm top 1/64 ; 1/32 and 1/16 inch graduation,
bottom 1/2 mm and 1/1 mm,

Numbering up to 500 mm length with continuing mm numbering at type A and type B.
With a cross section of 13 x 0.5 with cm numbering.

The rules from 1000 mm up to 4000 mm length with continuing cm numbering
at type A and type B.

The rules up to 4000 mm length according to tolerance class II are qualified
as reference pieces.

Therefore please order our calibration certificate together with the rule.
Steel Rules more than 4000 mm length are made according to workshop standard.



ART N°

Typ A	Typ B	Typ C	mm	13 x 0.5	on request
1011010010	1011020010	1011030010	100	13 x 0.5	on request
1011010015	1011020015	1011030015	150	13 x 0.5	on request
1011010020	1011020020	1011030020	200	13 x 0.5	on request
1011010025	1011020025	1011030025	250	13 x 0.5	on request
1011010030	1011020030	1011030030	300	13 x 0.5	on request
1011010035	—	—	350	13 x 0.5	on request
1011010040	—	—	400	13 x 0.5	on request
1011010050	—	—	500	13 x 0.5	on request
1013010015	1013020015	1013030015	150	18 x 0.5	on request
1013010030	1013020030	1013030030	300	18 x 0.5	on request
1013010040	1013020040	1013030040	400	18 x 0.5	on request
1013010050	1013020050	1013030050	500	18 x 0.5	on request
1013010060	—	—	600	18 x 0.5	on request
1013010080	—	—	800	18 x 0.5	on request
1013010100	1013020100	1013030100	1000	18 x 0.5	on request
1013010150	1013020150	1013030150	1500	18 x 0.5	on request
1013010200	1013020200	1013030200	2000	18 x 0.5	on request
1013010250	1013020250	1013030250	2500	18 x 0.5	on request
1013010300	1013020300	1013030300	3000	18 x 0.5	on request
1013010350	1013020350	1013030350	3500	18 x 0.5	on request
1013010400	1013020400	1013030400	4000	18 x 0.5	on request
1013010500	1013020500	1013030500	5000	18 x 0.5	on request
1013010600	1013020600	1013030600	6000	18 x 0.5	on request
1017010030	—	—	300	20 x 1.0	on request
1017010050	1017020050	1017030050	500	20 x 1.0	on request
1017010100	1017020100	1017030100	1000	20 x 1.0	on request
1017010150	1017020150	1017030150	1500	20 x 1.0	on request
1017010200	1017020200	1017030200	2000	20 x 1.0	on request
1017010250	1017020250	1017030250	2500	20 x 1.0	on request
1017010300	1017020300	1017030300	3000	20 x 1.0	on request
1017010350	1017020350	1017030350	3500	20 x 1.0	on request
1017010400	1017020400	1017030400	4000	20 x 1.0	on request
1017010500	1017020500	1017030500	5000	20 x 1.0	on request
1017010600	1017020600	1017030600	6000	20 x 1.0	on request

Stainless Steel Rules

acc. to tolerance class II

- **reading from left to right**

- semi rigid version, with wide cross section
- stainless spring steel
- non glare, matt surface
- etched graduation for a clear reading

type A = mm / mm top and bottom 1/1 mm graduation

type B = ½ mm / mm top ½ mm and bottom 1/1 mm graduation

type D = inch / mm top ½ mm and 1/1 mm
bottom 1/64 ; 1/32 and 1/16 inch graduation,

Numbering up to 500 mm lenght with continuing mm numbering at type A and type B.


The rules from 1000 mm up to 4000 mm lenght with continuing cm numbering at type A and type B.

The rules up to 4000 mm length according to tolerance class II are qualified as reference pieces.

Therefore please order our calibration certificate together with the rule.

Steel Rules more than 4000 mm lenght are made according to workshop standard.

type A

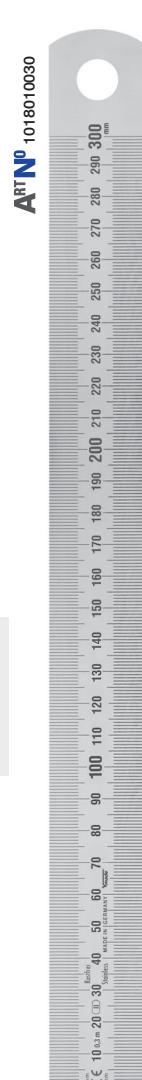

ART N° 1018010030

type B



ART N° 1018020030

type D



ART N° 1018040030



INOX

II

CE



CC

ART N°

type A	type B	type D	mm		
1018010030	1018020030	1018040030	300	30 x 1.0	on request
1018010050	1018020050	1018040050	500	30 x 1.0	on request
1018010060	1018020060	1018040060	600	30 x 1.0	on request
1018010100	1018020100	1018040100	1000	30 x 1.0	on request
1018010150	1018020150	1018040150	1500	30 x 1.0	on request
1018010200	1018020200	1018040200	2000	30 x 1.0	on request
1018010300	1018020300	1018040300	3000	30 x 1.0	on request
1018010400	1018020400	1018040400	4000	30 x 1.0	on request
1018010500	1018020500	—	5000	30 x 1.0	on request
1018010600	1018020600	—	6000	30 x 1.0	on request
1018010700	1018020700	—	7000	30 x 1.0	on request
1018010800	1018020800	—	8000	30 x 1.0	on request
1018010900	1018020900	—	9000	30 x 1.0	on request
1018011000	1018021000	—	10000	30 x 1.0	on request
1018011100	1018021100	—	11000	30 x 1.0	on request
1018011200	1018021200	—	12000	30 x 1.0	on request
1024010050	1024020050	1024040050	500	40 x 2.0	on request
1024010100	1024020100	1024040100	1000	40 x 2.0	on request
1024010150	1024020150	1024040150	1500	40 x 2.0	on request
1024010200	1024020200	1024040200	2000	40 x 2.0	on request

Stainless Steel Rules

acc. to tolerance class II

• reading from right to left

- semi rigid version, with wide cross section
- stainless spring steel
- non glare, matt surface
- etched graduation for a clear reading


type A= mm / mm top and bottom 1/1 mm graduation

type B= ½ mm / mm top ½ mm and bottom 1/1 mm graduation

type D= inch / mm top ½ mm and 1/1 mm
bottom 1/64 ; 1/32 and 1/16 inch graduation,

Numbering up to 500 mm length with continuing mm numbering at type A and type B.
The rules from 1000 mm up to 4000 mm length with continuing cm numbering at type A and type B.
The rules up to 4000 mm length according to tolerance class II are qualified as reference pieces.
Therefore please order our calibration certificate together with the rule.
Steel Rules more than 4000 mm length are made according to workshop standard.

type A



type B



type D



ART^{NO} 1019010030

ART^{NO} 1019020030

ART^{NO} 1019040030



ART^{NO}

type A	type B	type D	→ mm	mm	CC
1019010030	1019020030	1019040030	300	30 x 1.0	on request
1019010050	1019020050	1019040050	500	30 x 1.0	on request
1019010060	1019020060	1019040060	600	30 x 1.0	on request
1019010100	1019020100	1019040100	1000	30 x 1.0	on request
1019010150	1019020150	1019040150	1500	30 x 1.0	on request
1019010200	1019020200	1019040200	2000	30 x 1.0	on request
1019010300	1019020300	1019040300	3000	30 x 1.0	on request
1019010400	1019020400	1019040400	4000	30 x 1.0	on request
1019010500	1019020500	—	5000	30 x 1.0	on request
1019010600	1019020600	—	6000	30 x 1.0	on request
1019010700	1019020700	—	7000	30 x 1.0	on request
1019010800	1019020800	—	8000	30 x 1.0	on request
1019010900	1019020900	—	9000	30 x 1.0	on request
1019011000	1019021000	—	10000	30 x 1.0	on request
1019011100	1019021100	—	11000	30 x 1.0	on request
1019011200	1019021200	—	12000	30 x 1.0	on request
1025010050	1025020050	1025040050	500	40 x 2.0	on request
1025010100	1025020100	1025040100	1000	40 x 2.0	on request
1025010150	1025020150	1025040150	1500	40 x 2.0	on request
1025010200	1025020200	1025040200	2000	40 x 2.0	on request

Rules

Stainless Steel Rules, matt chromed

acc. to tolerance class II

- graduations on front and back

- graduation deeply etched
- matt chromed, non glare surface
- stainless spring steel
- cm graduation

front top and bottom 1/1 mm graduation


back top 1/2 mm and bottom 1/2 mm graduation



ART No	mm		CC
1001040010	100	13 x 0.5	on request
1001040015	150	13 x 0.5	on request
1001040020	200	13 x 0.5	on request
1001040030	300	13 x 0.5	on request
1001240050	500	18 x 0.5	on request
1001240100	1000	18 x 0.5	on request
1001260030	300	30 x 1.0	on request
1001260050	500	30 x 1.0	on request
1001260100	1000	30 x 1.0	on request

ART No 1001040030

front back

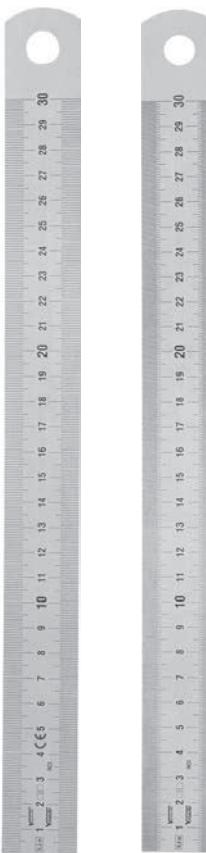

Stainless Steel Rules, double-sided

acc. to tolerance class II

- with identical reading on front- and backside

- etched graduation
- non glare surface
- stainless spring steel
- cm graduation

top 1/2 mm graduation

bottom 1/1 mm graduation


NEW



ART No	mm		CC
1010020010D	100	13 x 0.5	on request
1010020015D	150	13 x 0.5	on request
1010020020D	200	13 x 0.5	on request
1010020025D	250	13 x 0.5	on request
1010020030D	300	13 x 0.5	on request
1010020050D	500	13 x 0.5	on request
1012020050D	500	18 x 0.5	on request
1012020100D	1000	18 x 0.5	on request
1018020030D	300	30 x 1.0	on request
1018020050D	500	30 x 1.0	on request
1018020100D	1000	30 x 1.0	on request
1018020150D	1500	30 x 1.0	on request
1018020200D	2000	30 x 1.0	on request
1018020300D	3000	30 x 1.0	on request

ART No 1010020010D

front back

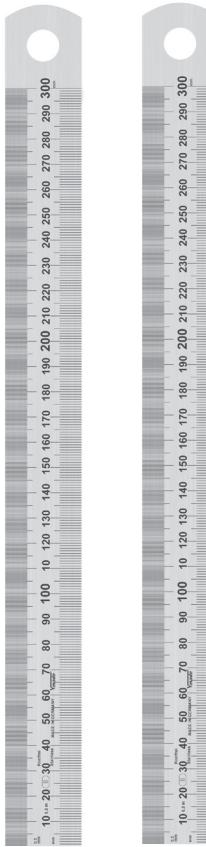

Stainless Steel Rules, with laser engraving

acc. to tolerance class I

• reading from left to right or right to left


- precise, deep laser engraved graduation, continuing numbers
- non glare, matt surface
- stainless spring steel



Numbering up to 500 mm length with continuing mm numbering.
The rules from 1000 mm up to 2000 mm length with continuing cm numbering.
The rules according to tolerance class I and are qualified as reference pieces.
Therefore please order our calibration certificate together with the rule.
Because of the deep graduation, due to the laser marking of the numbering,
these scales are particularly suitable where high demands are placed on the scale.



ART NO



CC

graduation in mm/mm from left to right

1010060015	150	13 x 0.5	on request
1010060030	300	13 x 0.5	on request
1010060050	500	13 x 0.5	on request
1012060030	300	20 x 0.5	on request
1012060050	500	20 x 0.5	on request
1012060100	1000	20 x 0.5	on request
1018060030	300	30 x 1.0	on request
1018060050	500	30 x 1.0	on request
1018060100	1000	30 x 1.0	on request
1018060150	1500	30 x 1.0	on request
1018060200	2000	30 x 1.0	on request

graduation in mm/mm from right to left

1011060015	150	13 x 0.5	on request
1011060030	300	13 x 0.5	on request
1011060050	500	13 x 0.5	on request
1013060030	300	20 x 0.5	on request
1013060050	500	20 x 0.5	on request
1013060100	1000	20 x 0.5	on request
1019060030	300	30 x 1.0	on request
1019060050	500	30 x 1.0	on request
1019060100	1000	30 x 1.0	on request
1019060150	1500	30 x 1.0	on request
1019060200	2000	30 x 1.0	on request

Rules

Stainless Steel Rules, with etched scale

Accuracy class acc. to DIN 2014/32/EU

• conformity assessment

- precise, etched scale, with clear reading
- stainless steel, non-glare, matt surface
- semi-rigid, with wide cross-section
- cm graduation
- with identification-no. and certificate of conformity

ART N° 1018110050



ART N° 1019110050



Option

- Workshop calibration certificate for a surcharge

These Steel Rules are manufactured acc. to MID standard and are qualified as reference or master pieces. Tolerance accuracy acc. to accuracy class II.

type A = mm / mm top and bottom with 1/1 mm graduation

type B = ½ mm / mm top with 1/2 mm and bottom with 1/1 mm graduation



ART N° type A	ART N° type B	ART N° type A	ART N° type B	→ mm ←	CC
graduation left to right					
1018110050	1018120050	1019110050	1019120050	500	30 x 1.0 on request
1018110100	1018120100	1019110100	1019120100	1000	30 x 1.0 on request
1018110150	1018120150	1019110150	1019120150	1500	30 x 1.0 on request
1018110200	1018120200	1019110200	1019120200	2000	30 x 1.0 on request
1018110300	1018120300	1019110300	1019120300	3000	30 x 1.0 on request
1018110400	1018120400	1019110400	1019120400	4000	30 x 1.0 on request
1024110050	1024120050	1025110050	1025120050	500	40 x 2.0 on request
1024110100	1024120100	1025110100	1025120100	1000	40 x 2.0 on request
1024110200	1024120200	1025110200	1025120200	2000	40 x 2.0 on request

Stainless Steel Rules, with laser engraved scale

Tolerance acc. to 2014/32/EU

ART N° 1008110050

• conformity assessment

- precise and deep, laser engraved scale, with clear reading
- stainless steel, non-glare, matt surface
- semi-rigid, with wide cross-section
- cm graduation
- with identification-no. and certificate of conformity



ART N° 1009110050



Option

- Workshop calibration certificate for a surcharge

These Steel Rules are manufactured acc. to MID standard and are qualified as reference or master pieces. Tolerance acc. to accuracy class II.

type A = mm / mm top and bottom with 1/1 mm graduation

type B = ½ mm / mm top with 1/2 mm and bottom with 1/1 mm graduation



ART N° type A	ART N° type B	ART N° type A	ART N° type B	→ mm ←	CC
graduation left to right					
1008110050	1008120050	1009110050	1009120050	500	30 x 1.0 on request
1008110100	1008120100	1009110100	1009120100	1000	30 x 1.0 on request
1008110150	1008120150	1009110150	1009120150	1500	30 x 1.0 on request
1008110200	1008120200	1009110200	1009120200	2000	30 x 1.0 on request
1004110050	1004120050	1005110050	1005120050	500	40 x 2.0 on request
1004110100	1004120100	1005110100	1005120100	1000	40 x 2.0 on request
1004110200	1004120200	1005110200	1005120200	2000	40 x 2.0 on request



Steel Rules, black anodized

metric graduation acc. to tolerance class II or BS

- graduation on front- and rearside
- reading from left to right
- precise, deep laser engraved scale
- carbon spring steel, with black anodized surface

frontside 1/1 mm and 1/2 mm

backside 1/10; 1/16; 1/20; 1/32; 1/64; 1/50; 1/100 inch



frontside



backside



ART NO



CC

1026431015	150 / 6	18 x 0.5	on request
1026431030	300 / 12	30 x 1.0	on request
1026431045	450 / 18	30 x 1.0	on request
1026431060	600 / 24	30 x 1.0	on request
1026431100	1000 / 40	30 x 1.0	on request

Stainless Steel Rules, with magnetic inserts

metric graduation acc. to tolerance class II or BS

- graduation on front- and rearside
- reading from left to right

- with two straight ends without whole
- precise, deep laser engraved scale
- non-glare, matt surface, with clear reading
- with detachable magnetic inserts



ART NO 1026433060

frontside: 1/2 mm and 1/1 mm



backside: 1/32 and 1/64 inch



with detachable
magnetic inserts



ART NO



CC

1026433015	150 / 6	30 x 1.0	on request
1026433030	300 / 12	30 x 1.0	on request
1026433060	600 / 24	30 x 1.0	on request
1026433090	900 / 36	30 x 1.0	on request
1026433120	1200 / 48	30 x 1.0	on request

Rules

Stainless Steel Rules

acc. to tolerance class II

- reading from left to right
- with conversion table on the backside

- etched graduation for a clear reading
- non glare, matt surface
- stainless spring steel



type A • front



type A • back

type A = mm / mm top and bottom 1/1 mm graduation
type B = ½ mm / mm top ½ mm and bottom 1/1 mm graduation



ART No


type A	type B	mm		CC
1055030030	1055050030	300	30 x 1.0	on request
1055030050	1055050050	500	30 x 1.0	on request
1055030100	1055050100	1000	30 x 1.0	on request
1055030200	1055050200	2000	30 x 1.0	on request

Stainless Steel Rules with Hook 90°

acc. to tolerance class II

- with hook 90°
- reading from left to right

- flexible design because of narrow cross section
- stainless spring steel
- non glare, matt surface
- front: top 1/1 mm and bottom 1/1 mm graduation
- back: top 1/2 mm and bottom 1/2 mm graduation
- etched graduation for a clear reading
- cm graduation

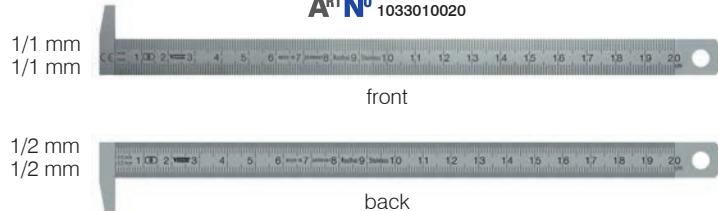

ART No 1033010020

ART No	mm		CC
1033010020	200	13 x 0.5	on request
1033010030	300	13 x 0.5	on request
1034010050	500	18 x 0.5	on request

Our new slogan:
Measuring Solutions

- ✓ more appropriate
- ✓ more meaningful
- ✓ more contemporary

This stands for the further development of the brand Vogel Germany to even more customer-oriented solutions in the measurement technology, development of the range, consulting, training, etc.





You would like to have a Rule with Special Scale? You are exactly right with us!

Use this form to send us your request:

- 1 download and fill out this form on the following link:
www.vogel-germany.de/request-rule-with-special-scale.pdf
- 2 send the form via eMail to info@vogel-germany.de
or send by fax to +49 2832 3621
- 3 get our offer

Any questions?
We are pleased to advise!

Inquiry Form • Rule with Special Scale

Your data

Customer Number: If already exist

Company Name:

Contact Person:

Phone:

Mail:

Information on your desired Rule with Special Scale

Quantity:

Standard length in mm:
(if applicable, please check)

<input type="radio"/> 150	<input type="radio"/> 300	<input type="radio"/> 500	<input type="radio"/> 1000	<input type="radio"/> 1500	<input type="radio"/> 2000	<input type="radio"/> 2500
<input type="radio"/> 3000	<input type="radio"/> 3500	<input type="radio"/> 4000	<input type="radio"/> 4500	<input type="radio"/> 5000	<input type="radio"/> 5500	<input type="radio"/> 6000

Special length:
Please specify the desired length in mm, we manufacture up to a length of 16,000 mm

Cross section (width): 13 x 0.5 18 x 0.5 20 x 1.0 30 x 1.0 40 x 2.0

Type of scaling: left – right right – left bottom – top top – bottom
 double-sided only left only right

if double-sided:	<input type="radio"/> mm	<input type="radio"/> cm	<input type="radio"/> inch	<input type="radio"/> mm	<input type="radio"/> cm	<input type="radio"/> inch
	frontside			backside		

Tolerances: Workshop standard EC I EC II BS MID

You would like to send us a draw to your desired Rule with Special Scale?
Send by email to info@vogel-germany.de or by fax to +49 (0) 2832 3621.

Rules 0 centre


Stainless Steel Rules with zero-point in the middle

acc. to workshop grade

- suitable for craftsmen and industry

- stainless spring steel
- non glare, matt surface
- etched graduation for a clear reading
- graduation reading with zero-point in the middle
- top and bottom 1/1 mm graduation

ART N° 1018010030-0-

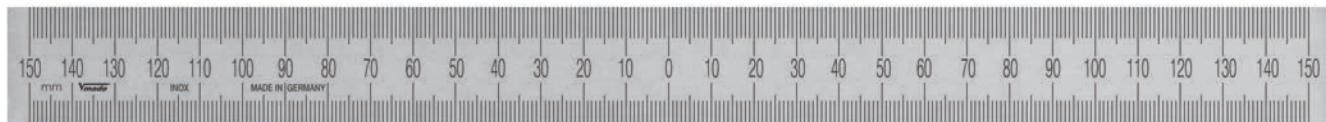

ART N° 1010010020-0-



ART N°	mm		CC
1010010010-0-	50 – 0 – 50	13 x 0.5	on request
1010010015-0-	75 – 0 – 75	13 x 0.5	on request
1010010020-0-	100 – 0 – 100	13 x 0.5	on request
1010010030-0-	150 – 0 – 150	13 x 0.5	on request
1010010040-0-	200 – 0 – 200	13 x 0.5	on request
1010010050-0-	250 – 0 – 250	13 x 0.5	on request
1010010060-0-	300 – 0 – 300	13 x 0.5	on request
1010010080-0-	400 – 0 – 400	13 x 0.5	on request
1010010100-0-	500 – 0 – 500	13 x 0.5	on request
1012010010-0-	50 – 0 – 50	18 x 0.5	on request
1012010015-0-	75 – 0 – 75	18 x 0.5	on request
1012010020-0-	100 – 0 – 100	18 x 0.5	on request
1012010030-0-	150 – 0 – 150	18 x 0.5	on request
1012010040-0-	200 – 0 – 200	18 x 0.5	on request
1012010050-0-	250 – 0 – 250	18 x 0.5	on request
1012010060-0-	300 – 0 – 300	18 x 0.5	on request
1012010080-0-	400 – 0 – 400	18 x 0.5	on request
1012010100-0-	500 – 0 – 500	18 x 0.5	on request
1016010010-0-	50 – 0 – 50	20 x 1.0	on request
1016010015-0-	75 – 0 – 75	20 x 1.0	on request
1016010020-0-	100 – 0 – 100	20 x 1.0	on request
1016010030-0-	150 – 0 – 150	20 x 1.0	on request
1016010040-0-	200 – 0 – 200	20 x 1.0	on request
1016010050-0-	250 – 0 – 250	20 x 1.0	on request
1016010060-0-	300 – 0 – 300	20 x 1.0	on request
1016010080-0-	400 – 0 – 400	20 x 1.0	on request
1016010100-0-	500 – 0 – 500	20 x 1.0	on request
1018010010-0-	50 – 0 – 50	30 x 1.0	on request
1018010015-0-	75 – 0 – 75	30 x 1.0	on request
1018010020-0-	100 – 0 – 100	30 x 1.0	on request
1018010030-0-	150 – 0 – 150	30 x 1.0	on request
1018010040-0-	200 – 0 – 200	30 x 1.0	on request
1018010050-0-	250 – 0 – 250	30 x 1.0	on request
1018010060-0-	300 – 0 – 300	30 x 1.0	on request
1018010070-0-	350 – 0 – 350	30 x 1.0	on request
1018010080-0-	400 – 0 – 400	30 x 1.0	on request
1018010100-0-	500 – 0 – 500	30 x 1.0	on request
1018010120-0-	600 – 0 – 600	30 x 1.0	on request
1018010150-0-	750 – 0 – 750	30 x 1.0	on request
1018010200-0-	1000 – 0 – 1000	30 x 1.0	on request
1018010250-0-	1250 – 0 – 1250	30 x 1.0	on request
1018010300-0-	1500 – 0 – 1500	30 x 1.0	on request
1018010400-0-	2000 – 0 – 2000	30 x 1.0	on request
1018010500-0-	2500 – 0 – 2500	30 x 1.0	on request

Circumference Measuring Tapes

Circumference Measuring Tape „UFM“


acc. to tolerance class II

- with etched or laser engraved scale
- for measuring diameters and circumferences
- application areas are among others manufacturers of: pipelines, boiler and tank construction, tire industry, forestry, etc.
- accuracy of total length with etched metric and laser engraved metric graduation according to EC II
- hardened spring steel or stainless spring steel

Graduation: mm
Version: etched




ART NO 181601



ART NO stainless	ART NO carbon steel	circumference mm	diameter mm	mm		CC
181601	181611	60 – 950	20 – 300	0.1	16 x 0.20	on request
181602	181612	940 – 2200	300 – 700	0.1	16 x 0.20	on request
181603	181613	2190 – 3460	700 – 1100	0.1	16 x 0.20	on request
181604	181614	3450 – 4720	1100 – 1500	0.1	16 x 0.20	on request
181605	181615	4710 – 5980	1500 – 1900	0.1	16 x 0.20	on request
181606	181616	5960 – 7230	1900 – 2300	0.1	16 x 0.20	on request
181607	181617	7220 – 8500	2300 – 2700	0.1	16 x 0.20	on request
181608	181618	8480 – 9760	2700 – 3100	0.1	16 x 0.20	on request
181609	181619	9730 – 11010	3100 – 3500	0.1	16 x 0.20	on request


Graduation: mm
Version: laser engraved



ART NO stainless	ART NO carbon steel	circumference mm	diameter mm	mm		CC
181801	181811	60 – 950	20 – 300	0.1	16 x 0.20	on request
181802	181812	940 – 2200	300 – 700	0.1	16 x 0.20	on request
181803	181813	2190 – 3460	700 – 1100	0.1	16 x 0.20	on request
181804	181814	3450 – 4720	1100 – 1500	0.1	16 x 0.20	on request
181805	181815	4710 – 5980	1500 – 1900	0.1	16 x 0.20	on request
181806	181816	5960 – 7230	1900 – 2300	0.1	16 x 0.20	on request
181807	181817	7220 – 8500	2300 – 2700	0.1	16 x 0.20	on request
181808	181818	8480 – 9760	2700 – 3100	0.1	16 x 0.20	on request
181809	181819	9730 – 11010	3100 – 3500	0.1	16 x 0.20	on request

Graduation: continuous in mm **NEW**
Version: raised markings and figures in bright natural steel colour on a dark, etched background

ART NO 183001



ART NO	circumference mm	diameter mm	mm		CC
183001	60 – 950	20 – 300	0.1	13 x 0.20	on request
183002	60 – 2200	20 – 700	0.1	13 x 0.20	on request
183003	60 – 3780	20 – 1200	0.1	13 x 0.20	on request
183004	60 – 4720	20 – 1500	0.1	13 x 0.20	on request
183005	60 – 5980	20 – 1900	0.1	13 x 0.20	on request
183006	60 – 7540	20 – 2400	0.1	13 x 0.20	on request
183007	60 – 8500	20 – 2700	0.1	13 x 0.20	on request
183008	60 – 9760	20 – 3100	0.1	13 x 0.20	on request
183009	60 – 11310	20 – 3600	0.1	13 x 0.20	on request


Straight Edges

Precision Straight Edge

DIN 874

- accuracy acc. to DIN 874 page 1, accuracy GG 0
- made of steel

- shaped in I-form
- with weight reducing holes
- measuring surfaces extra fine ground
- with wide flat sides for resting spirit levels
- incl. calibration certificate

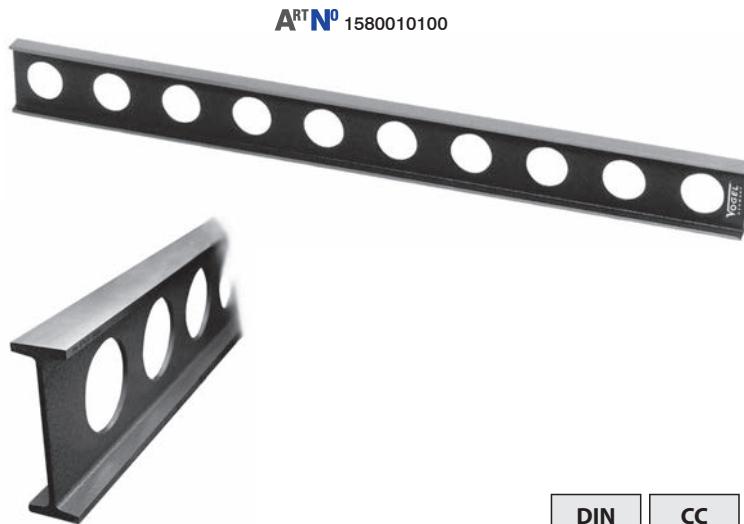

DIN CC

ART No	DIN 874 GG 0	Length	Dimensions	CC	ART No wooden case
1580010100	1000	160 x 50	inclusive	15998100	
1580010150	1500	160 x 50	inclusive	15998150	
1580010200	2000	160 x 50	inclusive	15998200	
1580010250	2500	160 x 50	inclusive	15998250	
1580010300	3000	180 x 60	inclusive	—	
1580010400	4000	180 x 60	inclusive	—	
1580010500	5000	200 x 80	inclusive	—	

Precision Straight Edge

DIN 874

- accuracy acc. to DIN 874 page 1, accuracy GG 1
- made of steel

- shaped in I-form
- with weight reducing holes
- measuring surfaces extra fine grinded
- with wide flat sides for resting spirit levels
- incl. calibration certificate



DIN CC

ART No	DIN 874 GG 1	Length	Dimensions	CC	ART No wooden case
1581010100	1000	100 x 30	inclusive	15998100-1	
1581010150	1500	100 x 30	inclusive	15998150-1	
1581010200	2000	120 x 40	inclusive	15998200-1	
1581010250	2500	120 x 40	inclusive	15998250-1	
1581010300	3000	140 x 40	inclusive	—	
1581010400	4000	140 x 40	inclusive	—	
1581010500	5000	160 x 40	inclusive	—	

Precision Straight Edge

DIN 874

- Quality DIN 874 page 1, accuracy GG 0, made of steel:

- edges and flat sides extra fine ground
- stainless and carbon steel quality available
- from up 2000 mm length shaped in I-form, with hand slots
- incl. calibration certificate

- Quality DIN 874 page 1, accuracy GG 1, made of steel:

- edges and flat sides finely ground
- stainless and carbon steel quality available
- from up 2000 mm length shaped in I-form, with hand slots
- incl. calibration certificate

- Accuracy acc. to DIN 874 page 1, accuracy GG 2, made of steel:

- edges finely ground and flat sides ground
- stainless and carbon steel quality available
- from up 4000 mm length shaped in I-form, with hand slots
- incl. calibration certificate

ART NO 1590000050

form A



form B



DIN

CC

ART NO	ART NO	form			CC	ART NO wooden case
DIN 874 GG 0 INOX	DIN 874 GG 0					
1590000050	1590010050	A	500	50 x 10	inclusive	15990050
1590000100	1590010100	A	1000	60 x 12	inclusive	15990100
1590000150	1590010150	A	1500	70 x 15	inclusive	15990150
1590000200	1590010200	B	2000	80 x 15	inclusive	15990200
1590000300	1590010300	B	3000	120 x 18	inclusive	—
1590000400	1590010400	B	4000	140 x 20	inclusive	—
1590000500	1590010500	B	5000	140 x 20	inclusive	—

DIN 874 GG 1 INOX	DIN 874 GG 1					
1591000050	1591010050	A	500	40 x 8	inclusive	15990050-1
1591000100	1591010100	A	1000	50 x 10	inclusive	15990100-1
1591000150	1591010150	A	1500	60 x 12	inclusive	15990150-1
1591000200	1591010200	B	2000	70 x 15	inclusive	15990200-1
1591000300	1591010300	B	3000	100 x 16	inclusive	—
1591000400	1591010400	B	4000	120 x 18	inclusive	—
1591000500	1591010500	B	5000	140 x 20	inclusive	—

DIN 874 GG 2 INOX	DIN 874 GG 2					
1592000050	1592010050	A	500	30 x 6	inclusive	15990050-2
1592000100	1592010100	A	1000	40 x 8	inclusive	15990100-2
1592000150	1592010150	A	1500	50 x 10	inclusive	15990150-2
1592000200	1592010200	A	2000	60 x 12	inclusive	15990200-2
1592000300	1592010300	A	3000	80 x 15	inclusive	—
1592000400	1592010400	B	4000	100 x 16	inclusive	—

Straight Edges

Precision Straight Edge

DIN 874

- cross-section in I-form
- made of aluminium

characteristics and advantages compared to steel:

- very light, good handling, midsection lacquered
- high accuracy- and pliability-values
- HC-coated and compressed, coating thickness $50\mu \pm 5\mu$
- high grade of abrasion resistance, high grade of corrosion resistance
- hardness 500 – 550 HV, top gliding, low thermal conductivity
- for grade 0 and 1 from 2000 mm with hand slots, grade 2 from up 2500 mm
- incl. calibration certificate

quality DIN 874 page 1, accuracy GG 0

quality DIN 874 page 1, accuracy GG 1

quality DIN 874 page 1, accuracy GG 2

ART NO 1593000050

form B



DIN

CC

ART NO DIN 874 GG 0	form			CC	ART NO wooden case
1593000050	B	500	60 x 12	inclusive	15991050
1593000100	B	1000	60 x 12	inclusive	15991100
1593000150	B	1500	100 x 15	inclusive	15991150
1593000200	B	2000	100 x 15	inclusive	15991200
1593000250	B	2500	100 x 15	inclusive	15991250
1593000300	B	3000	150 x 20	inclusive	—
1593000400	B	4000	150 x 20	inclusive	—
1593000500	B	5000	150 x 20	inclusive	—
DIN 874 GG 1					
1593010050	B	500	60 x 12	inclusive	15991050
1593010100	B	1000	60 x 12	inclusive	15991100
1593010150	B	1500	100 x 15	inclusive	15991150
1593010200	B	2000	100 x 15	inclusive	15991200
1593010250	B	2500	100 x 15	inclusive	15991250
1593010300	B	3000	150 x 20	inclusive	—
1593010400	B	4000	150 x 20	inclusive	—
1593010500	B	5000	150 x 20	inclusive	—
1593010600	B	6000	150 x 20	inclusive	—
DIN 874 GG 2					
1593020050	B	500	60 x 12	inclusive	15991050
1593020100	B	1000	60 x 12	inclusive	15991100
1593020150	B	1500	60 x 12	inclusive	15991150
1593020200	B	2000	60 x 12	inclusive	15991200
1593020250	B	2500	100 x 15	inclusive	15991250
1593020300	B	3000	100 x 15	inclusive	—
1593020400	B	4000	100 x 15	inclusive	—
1593020500	B	5000	150 x 20	inclusive	—
1593020600	B	6000	150 x 20	inclusive	—

Graduated Straight Edges

Precision Graduated Straight Edge

DIN 866

• Quality DIN 866 form A

- mm graduation on bottom edge
- 5 mm protection space on both ends
- flat side finely ground
- vertical edges finely ground, can be used as a rule
- stainless or carbon steel quality available




form A

ART N° 1691000050

• Quality DIN 866 form B

- mm graduation on bottom edge
- without protection-space end, at left side
- flat side ground
- vertical edges ground
- stainless or carbon steel quality available



form B

ART N° 1692000050

DIN

ART N° DIN 866 / A INOX	ART N° DIN 866 / A				ART N° wooden case
1691000050	1691010050	500	30 x 6	on request	1699050-A
1691000100	1691010100	1000	40 x 8	on request	1699100-A
1691000150	1691010150	1500	40 x 8	on request	1699150-A
1691000200	1691010200	2000	50 x 10	on request	1699200-A
1691000300	1691010300	3000	50 x 10	—	—
1691000400	1691010400	4000	60 x 12	—	—
1691000500	1691010500	5000	70 x 15	—	—
ART N° DIN 866 / B INOX	ART N° DIN 866 / B				
1692000050	1692010050	500	25 x 5	on request	1699050-B
1692000100	1692010100	1000	30 x 6	on request	1699100-B
1692000150	1692010150	1500	30 x 6	on request	1699150-B
1692000200	1692010200	2000	40 x 8	on request	1699200-B
1692000300	1692010300	3000	40 x 8	—	—
1692000400	1692010400	4000	50 x 10	—	—
1692000500	1692010500	5000	60 x 12	—	—

Tolerances according to DIN 866

total length graduation mm	500	1000	1500	2000	3000	4000	5000
tolerance (mm) form A	0.03	0.04	0.05	0.06	0.08	0.10	0.12
tolerance (mm) form B	0.075	0.10	0.125	0.15	0.20	0.25	0.30

Straight Edges with bevel

Straight Edge with bevel

- for simple workshop use
- made of steel
- chromed version
- type A = without graduation, type B = with mm graduation
- graduation black etched, bevel edge matt chrome finish

type A **ART No** 1794200030



type B **ART No** 1794300030




ART No type A	ART No type B	mm	mm
1794200030	1794300030	300	40 x 5
17942000400	17943000400	400	40 x 5
1794200050	1794300050	500	40 x 5
1794200080	1794300080	800	40 x 5
1794200100	1794300100	1000	40 x 5
1794200150	1794300150	1500	40 x 5
1794200200	1794300200	2000	40 x 5

Straight Edge with bevel

- for technicians
- made of hard aluminium, anodized quality
- anodised quality
- with black printed mm graduation and cm numbering




ART No 1795300030

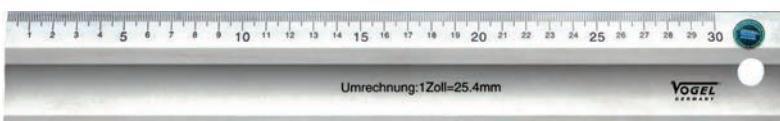

ART No	mm	mm
1795300030	300	50 x 5
1795300060	600	50 x 5
1795300100	1000	50 x 5
1795300180	1800	50 x 5

Straight Edge with bevel

- e.g. for school, education, DIY and craftsmen
- made of hard aluminium, anodized quality
- made of hard aluminium, anodised quality
- with mm graduation, printed
- backside covered with anti-slip foam rubber

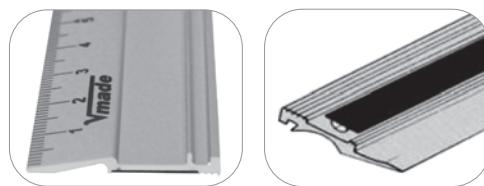

ART No 1796300030



ART No	mm	mm
1796300030	300	35 x 1.5
1796300060	600	35 x 1.5
1796300100	1000	35 x 1.5

Why actually Vogel Germany?

Besides a wide range of products which offer the right solution for every application, Vogel Germany is a service oriented company that is also powerful in consulting, training and logistics.

For further information on Vogel Germany please visit:

www.vogel-germany.de



Vogel Germany

- ✓ offers best customer service
- ✓ belongs to the strong Fervi Group
- ✓ offers quality Made in Germany

Master-Line



Digital Distance and Positioning Measuring System incl. VGA Camera with Zoom Factor • IP54

NEW

- electronic unit and LCD fixed on the sliding parts
- stainless steel, hardened rail
- feet with magnet inserts, rubber caps (non-slip) and positioning arrows
- large color display with crosshair and zoom function
- LED light units with 4x white and 4x UV / black light, switchable

Elektronik

- large LCD with clear reading, digit height 14 mm
- On/Off switch, zero setting at any position, data hold function
- Preset, Origin switch
- unit switchable in mm/inch
- data transfer via WiFi or Bluetooth®
- incl. 2x 3 V battery (type CR 2032, art.-no.: 90112), with operation manual



Camera (art.-no. 601251)

- VGA camera sensor, Camera rechargeable
- focus manually adjustable via handwheel
- 10x zoom function (10% steps)
- 3.5" colour display, 720 pixels
- video format AVI, photo format JPG
- Mini USB port for charging cable
- Mini SD card slot
- incl. Micro SD card, 4 GB
- incl. Micro SD card adapter for transfer to PC

LED lighting units

- 4x white light
- 4x UV/black light
- switchable

VGA camera



Option

- transmitter and receiver for wireless communication as a set, art.-no.: 2040101, see page 334



Option
art.-no.: 2040101,
2023106 and 209000



ART NO	mm / inch	mm / inch	mm	mm	total length mm	CC
103052	135 / 5	0.01 / 0.0005	0.01	0.03	275	inclusive
103053	185 / 7	0.01 / 0.0005	0.01	0.03	325	inclusive
103054	285 / 11	0.01 / 0.0005	0.01	0.03	425	inclusive
103055	480 / 18	0.01 / 0.0005	0.01	0.04	625	inclusive



Digital Distance and Positioning Measuring System incl. VGA Camera with Zoom Factor • IP40

NEW



- electronic unit and LCD fixed on the sliding parts
- extremely hardened rail made of aluminium
- feet with rubber caps (non-slip)
- large colour display with crosshair and zoom function
- LED light units with 4x white and 4x UV / black light, switchable

Electronic

- large LCD with clear reading, digit height 14 mm
- On/Off switch, zero setting at any position, data hold function
- Preset, Origin switch
- unit switchable in mm/inch
- data transfer via WiFi or Bluetooth®
- incl. 2x 3 V battery (type CR 2032, art.-no.: 90112), with operation manual

Camera (art.-no. 601251)

- VGA camera sensor, camera rechargeable
- focus manually adjustable via hand wheel
- 10x zoom function (10% steps)
- 3,5" colour display, 720 pixels
- video format AVI, photo format JPEG
- Mini USB port for charging cable
- Mini SD card slot
- incl. Micro SD card, 4 GB
- incl. Micro SD card adapter for transfer to PC

Options

- data transfer via WiFi, art.-no.: 2040101, see page 334
- data transfer via Bluetooth®, art.-no.: 2023106 + 209000, see page 334




LED lighting units

- 4x white light
- 4x UV/black light
- switchable

VGA camera



bottom



ART NO	mm / inch	mm / inch	mm	mm	max.	total length mm	CC
102806	600 / 24	0.01 / 0.0005	1 mW	0.01	0.05	920	inclusive
102807	1000 / 40	0.01 / 0.0005	1 mW	0.01	0.06	1320	inclusive
102808	1500 / 60	0.01 / 0.0005	1 mW	0.01	0.10	1800	inclusive
102809	2000 / 80	0.01 / 0.0005	1 mW	0.01	0.13	2300	inclusive
102810	2500 / 100	0.01 / 0.0005	1 mW	0.01	0.20	2800	inclusive
102811	3000 / 120	0.01 / 0.0005	1 mW	0.01	0.25	3300	inclusive

Digital Measuring Magnifier

Digital Measuring Magnifier

NEW

- with parallax-free reading
- large colour display with scaling
- each LED light unit with 4x UV/black light and 4x white light, switchable


- VGA camera sensor, camera rechargeable
- focus manually adjustable via hand wheel
- 3.5" colour display, 720 pixels
- video format AVI, photo format JPEG
- Mini-USB port for charging cable
- Mini SD card slot
- incl. Micro SD card, 4 GB
- incl. Micro SD card adapter for transfer to PC

Suitable for professional applications

- printing and circuit board industry
- tool and mechanical engineering
- textile manufacturing
- facade and window construction
- automotive industry
- building appraisal
- and many other technical applications

Option

- accessories: Stand, art.-no.: 601255

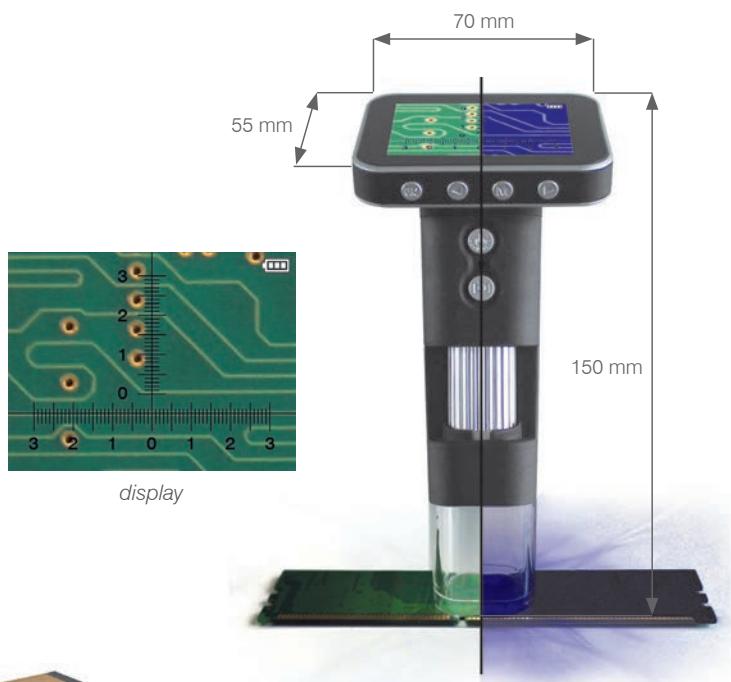

LED lighting units

- 4x white light
- 4x UV/black light
- switchable

VGA camera



bottom



ART NO	mm / inch	mm	height in mm
601250	3 – 0 – 3	0.1	160
Option: Stand			
601255	—	—	170

Explore our
Website.

www.vogel-germany.de



VOGEL
GERMANY
Measuring Solutions

Any questions?


We are pleased to advise.

Electr. Digital Scale • IP67 (only scale)

- for horizontal and vertical use
- stainless steel, hardened rail
- with electronic unit and separate LCD display
- for mounting on machine tools, milling-, drilling machines and for many other purposes
- with data output, top model (connectivity also for Digmatic measuring devices)
- large LCD display with clear reading, digit height 18 mm
- rugged plastic housing, with built-in magnet on the backside
- incl. fixture for wall mounting of the LCD display, with accessories
- flexible application, in horizontal and vertical position
- expandable with additional electronic units and LCD displays
- On/Off switch, zero setting at any position, data hold function
- Preset-, Origin-, ABS / INC button
- unit switchable in mm/inch/fraction in inch
- incl. 2x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Options

- data box with USB port, art.-no.: 2420194
- footswitch for data box, art.-no.: 209011
- transmitter for wireless communication via WiFi, art.-no.: 209006, see page 334
- receiver for wireless communication via WiFi, art.-no.: 209007, see page 334
- transmitter and receiver for wireless communication as set, art.-no.: 2040101, see page 334

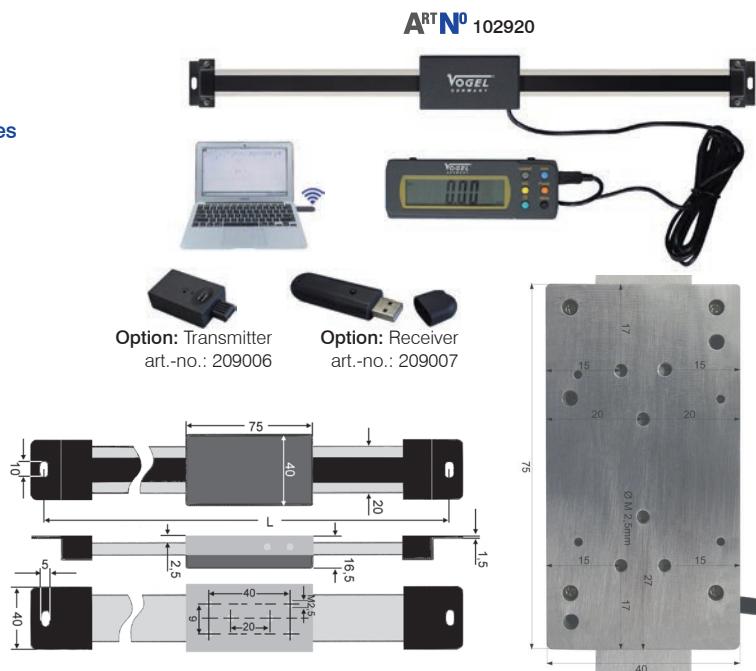

ART No	mm / inch	mm / inch	mm	mm	L mm	CC
102920	150 / 6	0.01 / 0.0005	0.01	0.06	284	on request
102921	200 / 8	0.01 / 0.0005	0.01	0.08	334	on request
102922	300 / 16	0.01 / 0.0005	0.01	0.10	436	on request
102923	600 / 24	0.01 / 0.0005	0.01	0.15	735	on request
102924	1000 / 40	0.01 / 0.0005	0.01	0.20	1135	on request


Electr. Digital Scale • IP67 NEW

- in horizontal and vertical version
- stainless steel, hardened rail
- with LCD display on the rail
- for mounting on machine tools, milling-, drilling machines and for many other purposes
- with integrated Bluetooth® technology

- large LCD display with clear reading, digit height 10 mm
- flexible application, in horizontal and vertical position
- On/Off switch, data hold function
- zero setting at any position
- unit switchable in mm/inch
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Option

- data transfer via Bluetooth®, art.-no.: 2023106, see page 334

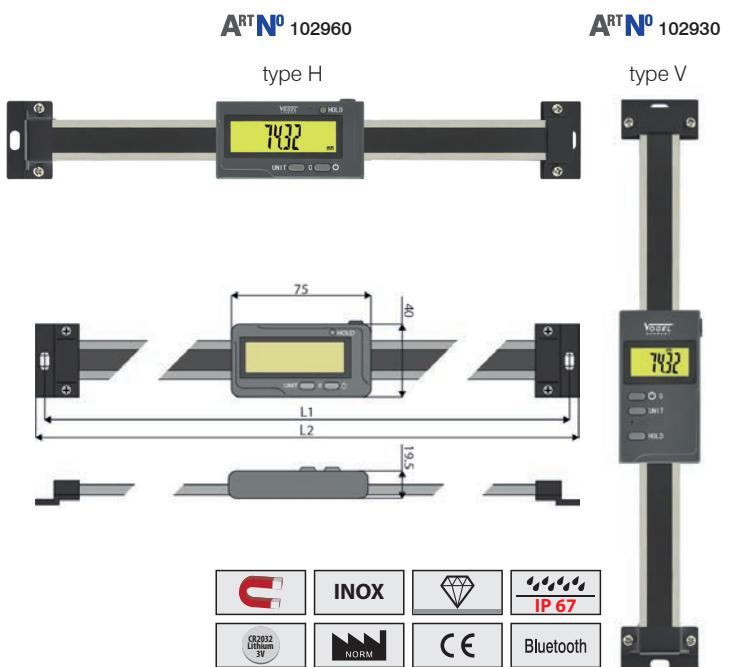

ART No type H	ART No type V	mm / inch	mm / inch	mm	mm	L 1 mm	L 2 mm	CC
102960	102930	150 / 6	0.01/0.0005	0.01	0.02	277	286	on request
102961	102931	200 / 8	0.01/0.0005	0.01	0.03	317	326	on request
102962	102932	300 / 12	0.01/0.0005	0.01	0.03	417	426	on request
102963	102933	500 / 20	0.01/0.0005	0.01	0.05	637	646	on request
102964	102934	1000 / 40	0.01/0.0005	0.01	0.06	1137	1146	on request

Digital Measuring Wheel and Steel Measuring Tapes

Electr. Digital Measuring Wheel • IP51

- lightweight construction made of black lacquered steel
- rugged foldable construction, for outdoor use, with battery
- large LCD display, 12 mm height of digits, with backlight
- dust- and drop-water resistant key panel
- On/Off-button, autom. shut-off after approx. 3 min.
- "Smart Wheel"-function (autom. includes wheel-diameter for accurate wall-to-wall measurements)
- Start/Stop Mode, prevents accidental measurements
- HOLD function, memory function, reset button
- reading in Meter / Feet / Yard / m² / feet² / yard² / m³ / feet³ / yard³
- plastic made measuring wheel with rubber cover and stand for parking
- area of application from up -10 °C ~ +60 °C, handle made of ABS plastic
- incl. 4x 1.5 V battery (type AAA, art.-no.: 90002), with operation manual



measuring wheel folded



operation panel



ART NO	m / ft	m	max. ± %	measuring wheel Ø mm	mm
140210	999.999 / 999.999.9	0.1	0.5	318	1122 x 318 x 85

Steel Measuring Tapes

- e.g. for machine industry, workbenches, etc.
- polyamid coated
- adhesive
- wear off resistant and non corrosive graduation

Other length and graduations
are available on request!



ART NO	mm	
graduation from left to right		
1211310100	1000	13 x 0.5
1211310200	2000	13 x 0.5
1211310300	3000	13 x 0.5
1211310400	4000	13 x 0.5
1211310500	5000	13 x 0.5
1211310600	6000	13 x 0.5
graduation from right to left		
1211410100	1000	13 x 0.5
1211410200	2000	13 x 0.5
1211410300	3000	13 x 0.5
1211410400	4000	13 x 0.5
1211410500	5000	13 x 0.5
1211410600	6000	13 x 0.5

Wood Folding Rule

acc. to tolerance class III, CE

- surface coated with a water repellent, environmentally friendly UV-finish
- absolutely professional top tool, extremely sturdy and durable
- with double mm graduation on front and back
- with 10 links, closely spaced fins, fitting springs back
- with standard angle imprint at the 2nd link
- assembled with special 3 mm rivets
- precise 90° angle locking and ruler function
- optimal leverage and handy to use



Example illustration: Wood Folding Rule in different colours

Other colours or advertising print
are available on request!



Example illustration: Wood Folding Rule with advertising print



ART NO	mm / inch	colour	each link	L x W in total	number of links
1312010200	2000 / 78.74	white	3.2 x 16	235 x 35	10

Follow us on Facebook.

Never miss any news about our products, promotions and offers.



Any questions?
We are pleased to advise.

facebook.com/VogelGermany

Pocket Measuring Tapes

Pocket Measuring Tape

tolerance class II acc. to MID

- exceptional tape stability
- suitable for craftsmen and industry
- ergonomic design
- lies save and non slip in your hand

- rugged and rubber covered housing with stainless metal clip and lanyard
- yellow coated blade, high rubb-off resistant and kink resistant
- self adjusting end-hook, with magnetic dots
- long-life spring made of special steel, automatic blade return and blade stop
- black/red figures, black scale
- from up to 25 mm blade with 3 rivets fixed
> 25 mm blade with 2 rivets fixed



ART N° 141003



with hanging card



ART N°



graduation in mm

141003	3 m	0.9	16	65 x 65 x 35	1400
141005	5 m	1.3	19	65 x 73 x 35	1750
141008	8 m	1.8	25	80 x 85 x 40	2100
141010	10 m	1.8	25	80 x 85 x 40	2100
graduation in mm/inch					
141103	3 m / 122 inch	0.9	16	65 x 65 x 35	1400
141105	5 m / 197 inch	1.3	19	65 x 73 x 35	1750
141108	8 m / 315 inch	1.8	25	80 x 85 x 40	2100

Pocket Measuring Tape, in stainless steel metal housing

tolerance class II acc. to MID

- exceptional tape stability
- suitable for craftsmen and industry
- with graduation on front- and backside
- backside with crosswise graduation for comfortable vertical reading
- autom. blade-stop
- lies save and non slip in your hand

- rugged and rubber covered housing, with stainless metal clip and lanyard
- yellow coated blade, high rubb-off resistant and kink resistant
- self adjusting end-hook, with magnetic dots
- long-life spring made of special steel, automatic blade return and blade stop
- black/red figures, black scale
- from up to 25 mm blade with 3 rivets fixed
> 25 mm blade with 2 rivets fixed

ART N° 141408

ART N° 141405




ART N° 141403



backside: vertical reading



ART N°



141403	3	0.9	19	80 x 75 x 35	1750
141405	5	1.3	25	80 x 75 x 42	2100
141408	8	1.8	25	80 x 75 x 42	2100

Pocket Measuring Tapes and Laser Distance Meter

Electr. Digital Measuring Tape

- exceptional tape stability
- LCD display with clear digits
- weatherproof housing
- lies save and non slip in your hand
- rugged and rubber covered housing with stainless metal clip and lanyard
- yellow coated blade, high rubb-off resistant
- self adjusting end-hook, automatic blade return and blade stop
- adjustable readout in display from either side of the housing, mm/inch switchable
- black/red figures, black graduation, no holes punched in the blade
- zero setting at any position, with data hold function, On/Off button
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), and operation manual



ART NO	cm	max. ± mm	mm	mm	mm	mm	CC
140105	5 m / 16 ft	1	1.5	19	75 x 70 x 32	1700	on request

Pocket Measuring Tape with Laser Distance Meter

NEW

tolerance class II acc. to MID

- exceptional tape stability
- only suitable for indoor use

- nylon-wrapped, black tape, extremely scratch resistant and kink resistant
- sliding hook, for internal and external measurement
- long-life spring made of special steel
- automatic blade return and blade stop
- white/red figures, white scale
- scaling on both sides in mm/cm



Laser Distance Meter

- the instrument measures distance, area and volume
- indirect measuring for height measuring
- calculation of angles and triangular areas, trapezoidal faces and much more
- measuring range 0 – 30 m, reading 0,001 m
- max. total accuracy \pm 1.5 mm, laser wavelength 19 nm
- „low-battery display“
- measuring in meter, inch or engl. feet, measurement speed 0.5 sec.
- autom. power off: after ~20 sec.
- operation temperature -10 °C ~ +40 °C, storage temperature -20 °C ~ +60 °C
- user-friendly rubber buttons, sound signal by pressing the buttons
- laser class II, FCC test part 15, EN 60825-1:2007 and others
- laser parameter 620 – 660 nm, output max.1 mW
- with 3.7 V Li-Ion rechargeable battery, incl. charger 5 V AC and operation manual



display on the backside





ART NO	cm	max. ± mm	mm	mm	mm	mm	CC
140108	5 m / 16ft	1	1.5	19	65 x 4.3 x 65	1700	on request

Laser Distance Measurer

Laser Distance Meter NEW

- the instrument measures distance, area and volume
- distances can be added or subtracted
- indirect measuring for height measuring
- calculation of angles and triangular areas, trapezoidal faces and much more
- Pythagoras-Function 1:** calculation of distance using two related measurements
- Pythagoras-Function 2:** calculation of distance using three related measurements

- „low-battery-display“, with backlight, memory function for 20 measurements
- measuring in meter, inch or engl. feet switchable, measurement speed 0.1 ~ 4 sec.
- autom. power off: laser beam after ~15 sec., device after ~120 sec.
- operation temperature -10 °C ~ +40 °C, storage temperature -20 °C ~ +65 °C
- user-friendly rubber buttons, sound signal by pressing the buttons
- laser class II, FCC test (part 15), EN 60825-1:2007
- laser parameter 620 – 670 nm, output max. 1 mW
- carrying bag with belt loop, hand loop, 2x 1.5 V battery (type AAA, art.-no.: 90002) and operation manual


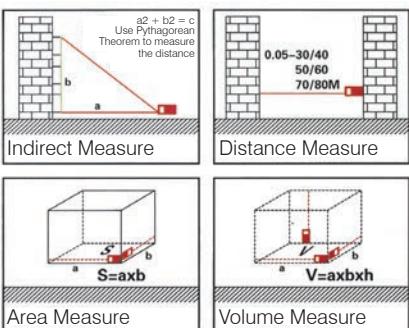


ART NO	m	m	max. ± mm	nm	W mW	mm	CC
140134	0.05 – 100	0.001	5	620 ~ 670	max. 1	120 x 56 x 27	on request

Laser Distance Meter NEW

- the instrument measures distance, area and volume
- distances can be added or subtracted
- indirect measuring for height measuring
- calculation of angles and triangular areas, trapezoidal faces and much more
- Pythagoras-Function 1:** calculation of distance using two related measurements
- Pythagoras-Function 2:** calculation of distance using tree related measurements
- angle sensor 0° – 150°**

- „low-battery-display“, with backlight, memory function for 50 measurements
- measuring in meter, inch or engl. feet switchable, measurement speed 0,5 sec.
- autom. power off: laser beam after ~ 30 sec., device after ~ 180 sec.
- operation temperature -10 °C ~ +40 °C, storage temperature -20 °C ~ +65 °C
- user-friendly rubber buttons, sound signal by pressing the buttons
- laser class II, FCC test (part 15), EN 60825-1:2007
- laser parameter 620 – 690 nm, output max. 1 mW
- carrying bag with belt loop, hand loop, 2x 1.5 V battery (type AAA, art.-no.: 90002) and operation manual

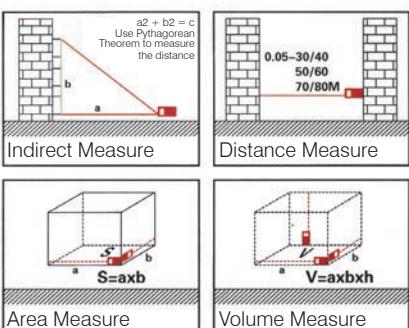

ART NO	m	m	max. ± mm	nm	W mW	mm	CC
140132	0.05 – 100	0.001	2	620 ~ 690	max. 1	117 x 52 x 27	on request

Measuring tapes in a light metal diagonal frame

acc. to tolerance class II

NEW

ART N° 143201



- product for highest demands


- in a robust and rigid light metal frame
- ergonomic handle
- crank core with metal shaft, ensures fatigue-free measurement work
- lasting ease of the tape when rolling in and out
- with different beginnings for the tabs
- measuring tape made of steel, painted white, with black figures
- graduation and numbering through transparent lacquer protected against abrasion
- graduation in mm, one side

Beginning of tape

type A



type B



type C



ART N°

143201
143202
143203
143204
143205
143206
143207
143208
143209
143210
143211
143212

type

type A



m

10

20

30

50

10

20

30

50

10

20

30

50

10

20

30

50

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

13

1

Measuring Tapes

Measuring Tapes in a light PVC coated steel case

acc. to tolerance class II

NEW

ART N° 143101



product for highest demands

- in a robust and PVC coated steel case
- crank core with metal shaft, ensures fatigue-free measurement work
- Lasting ease of the tape when rolling in and out
- with different beginnings for the tabs
- Measuring tape made of steel, painted white, with black figures
- graduation and numbering through transparent lacquer protected against abrasion
- graduation in mm, one side

Beginning of tape



II

ART N°	type	→ ← m	mm
143101	type A	10	13
143102		20	13
143103		30	13
143104		50	13
143105	type B	10	13
143106		20	13
143107		30	13
143108		50	13
143109	type C	10	13
143110		20	13
143111		30	13
143112		50	13



Send us a
partnership request



OXOMI.com



Complete catalogue
assortment searchable
on OXOMI.com

Tank Dipping Tapes of stainless steel

acc. to tolerance class II

NEW

- tolerance class II, $\pm a + bL$
($a = 0,3\text{mm}$, $b = 0,2 \text{ mm}$, $L = \text{length in m}$)

- available on request:
tolerance class I, $\pm a + bL$
($a = 0,1\text{mm}$, $b = 0,1 \text{ mm}$, $L = \text{length in m}$)

- strong frame of anodised light metal with oblique handle
- strong foldable winding arm of anodised light metal
- winding drum of durable plastic
- bright graduation and figures, on dark background
- graduation in mm, one side

Tension


- the tension force of the tape is in accordance with the weight of the dip weight
(indicate when ordering for which dip weight the tapes should be used)

Options

- type plumb U, art.-no.:143601
- type plumb D, art.-no.:143602

Dipping Tapes dimensions for other applications on request!

ART NO 143501

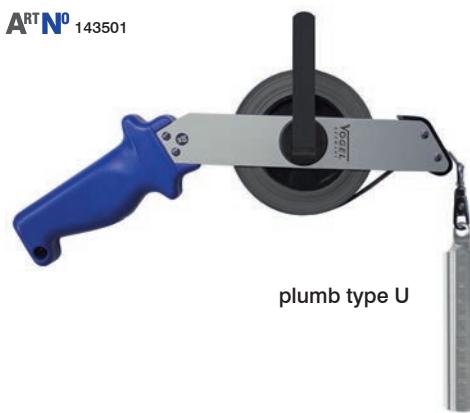

plumb type U

ART NO 143511



plumb type D

Beginning of tape

type U



steel, high etched

type D



stainless steel, high etched

ART NO 143601



plumb type U

- material stainless steel
- weight is attached by a swivel hook
- graduated one side only
- cylindrical with flat bottom
- 121 mm long, $\varnothing 25 \text{ mm}$
- graduation: mm
- weight: 400 g

ART NO 143602



plumb type D

- material brass
- weight is attached by a swivel hook
- graduated one side only
- cylindrical with tip
- 171 mm long, $\varnothing 22 \text{ mm}$
- graduation: mm
- weight: 400 g

II

ART NO

plumb type

→ ←
m

mm

143501	U	10	13 x 0,2
143502		20	13 x 0,2
143503		30	13 x 0,2
143504		50	13 x 0,2
143511	D	10	13 x 0,2
143512		20	13 x 0,2
143513		30	13 x 0,2
143514		50	13 x 0,2



Calipers



Digital Calipers	57 – 62
Digital Calipers, left-handed.....	61
Digital Calipers, carbon fiberglass	61
Special Digital Calipers	62 – 63
Pocket Caliper	64 – 67
Pocket Calipers, left-handed.....	66
Dial Calipers	67
Digital Workshop Calipers.....	68 – 70
Analog Workshop Calipers	71 – 72
Digital Groove Caliper.....	74
Analog Groove Caliper.....	74
Digital Brake Disc Calipers	75 – 76
Analog Brake Disc Calipers	75
Analog Brake Drum Caliper	76
Digital Gear Teeth Calipers.....	77
Brass Button Gauges.....	78
Digital Tread Depth Caliper	79
Digital Depth Caliper	79 – 81
Analog Depth Caliper	82
Measuring Tool Sets.....	83 – 84

Image Directory • Calipers


Page 57	Page 57	Page 57	Page 58	Page 58
Page 59	Page 59	Page 59	Page 60	Page 60
Page 60	Page 61	Page 61	Page 61	Page 61
Page 62	Page 62	Page 62	Page 63	Page 63
Page 63	Page 64	Page 64	Page 64	Page 64
Page 65				
Page 66	Page 66	Page 66	Page 67	Page 67

Image Directory • Calipers

Page 67	Page 67	Page 68	Page 68	Page 69
Page 69	Page 70	Page 70	Page 70	Page 71
Page 71	Page 72	Page 72	Page 72	Page 74
Page 74	Page 74	Page 75	Page 75	Page 75
Page 75	Page 76	Page 76	Page 77	Page 78
Page 78	Page 78	Page 78	Page 79	Page 79
Page 79				



Image Directory • Calipers

				
Page 80	Page 80	Page 80	Page 80	Page 81
				
Page 81	Page 82	Page 82	Page 82	Page 82
				
Page 82	Page 83	Page 83	Page 83	Page 84
				
Page 84				


Sylvac • Ultra-light Caliper UL4 • IP67

DIN 862

NEW



- with integrated Bluetooth® technology

- ultra light caliper for external and internal measurements
- new series with extra large display, digit height 20 mm
- aluminium beam reinforced by four stainless steel rods
- long jaws 200 mm coated with titanium
- new carbide upper internal tips
- measuring force applied control
- mm/inch switchable
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual



Options

- data transfer via cable, Proximity – USB, art.-no.: 2023101, see page 334
- data transfer via cable, Proximity – RS 232, art.-no.: 2023100, see page 334
- data transfer via Bluetooth®, art.-no.: 2023106S, see page 334

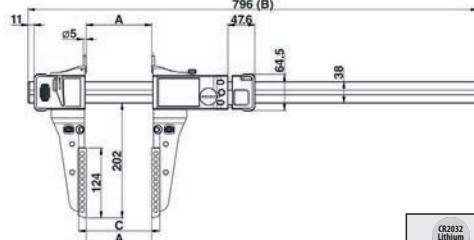

ART NO	mm / inch	mm / inch	mm	mm	mm	A mm	B mm	CC
200950	400 / 16	0.01 / 0.0005	0.02	0.03	202	0 – 478	796	inclusive
200951	600 / 24	0.01 / 0.0005	0.02	0.04	202	0 – 683	1001	inclusive
200952	1000 / 40	0.01 / 0.0005	0.02	0.05	202	0 – 1093	1411	inclusive
200953	1500 / 60	0.01 / 0.0005	0.02	0.09	202	0 – 1608	1926	inclusive
200954	2000 / 80	0.01 / 0.0005	0.03	0.12	202	0 – 2123	2441	inclusive
200955	2500 / 100	0.01 / 0.0005	0.03	0.15	202	0 – 2638	2956	inclusive
200956	3000 / 120	0.01 / 0.0005	0.03	0.20	202	0 – 3153	3471	inclusive



Sylvac • Caliper S_Cal EVO STANDARD • IP67

DIN 862

NEW

- professional standard caliper

- new extra-large display
- without data output
- water and coolant resistant, protection class IP67
- automatic switch-on by moving the slide (absolute system S.I.S)
- switching to economy mode after 20 minutes of inactivity
- storage of the position in economy mode
- mechanics made of stainless steel, hardened and lapped
- mm/inch switchable
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

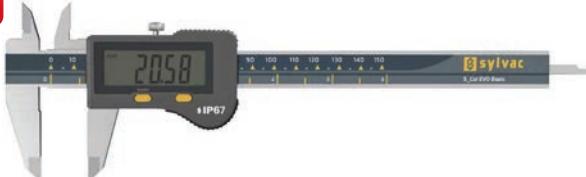

ART NO	mm / inch	mm / inch	mm	mm	mm	mm	mm	CC
202195	150 / 6	0.01 / 0.0005	0.01	0.02	40	16	flat	on request
202196	200 / 8	0.01 / 0.0005	0.01	0.03	50	19	flat	on request
202197	300 / 12	0.01 / 0.0005	0.01	0.03	64	19	—	on request

Sylvac • Caliper S_Cal EVO SMART • IP67

DIN 862

NEW

- with integrated Bluetooth® technology

- new extra large display
- customizable button for selectable function
- water and coolant resistant, protection class IP67
- automatic switch-on by moving the slide (absolute system S.I.S.)
- switching to economy mode after 20 minutes of inactivity
- storage of the position in economy mode
- mechanics made of stainless steel, hardened and lapped
- mm/inch switchable
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual



ART NO	mm / inch	mm / inch	mm	mm	mm	mm	mm	CC
202190	150 / 6	0.01 / 0.0005	0.01	0.02	40	16	flat	on request
202191	200 / 8	0.01 / 0.0005	0.01	0.03	50	19	flat	on request
202192	300 / 12	0.01 / 0.0005	0.01	0.03	64	19	—	on request



Precision Digital Calipers

"Absolute" Electr. Digital Caliper • IP67

DIN 876

- professional standard caliper
- with metal housing and metal function buttons
- water- a. coolant proof acc. to DIN 40050 / IEC 60529

- without data output
- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped
- On/Off button, autom. shutdown, with ABS/INC measuring system
- With locking screw, with screwed battery compartment cover
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR1632, art.-no.: 90101), with operation manual

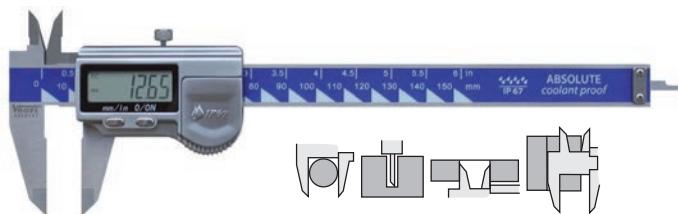


ART NO	mm / inch	mm / inch	mm	mm	mm	mm	flat	CC
202130-2	150 / 6	0.01 / 0.0005	0.01	0.03	40	16	flat	on request
202131-2	200 / 8	0.01 / 0.0005	0.01	0.03	50	19.5	flat	on request
202132-2	300 / 12	0.01 / 0.0005	0.01	0.03	60	20.5	flat	on request

"Absolute" Electr. Digital Caliper • IP54

DIN 862

- professional standard caliper
- with optical tolerance alarm by LED signal
- with glass rail for more accuracy
- with data output (micro USB)
- spray water proof acc. to DIN 40050 / IEC 60529

- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped, with fixing screw
- with PRESET/ORIGIN/ABS/INC-system
- On/Off button, autom. power off
- mm/inch switchable, zero setting at any position
- incl. 2x 3 V battery (type CR2032, art.-no.: 90112), with operation manual



Options

- data transfer via cable, art.-no.: 3420195, see page 334
- data transfer via WiFi, art.-no.: 2040102, see page 334
- data transfer via Bluetooth®, art.-no.: 209009, see page 334

ART NO	mm / inch	mm / inch	mm	mm	mm	mm	flat	CC
202180	150 / 6	0.01 / 0.0005	0.01	0.02	40	16	flat	on request
202181	200 / 8	0.01 / 0.0005	0.01	0.03	50	19.5	flat	on request
202182	300 / 12	0.01 / 0.0005	0.01	0.03	60	20.5	flat	on request



Our new slogan: Measuring Solutions

- ✓ more appropriate
- ✓ more meaningful
- ✓ more contemporary

This stands for the further development of the brand Vogel Germany to even more customer-oriented solutions in the measurement technology, development of the range, consulting, training, etc.

„Absolute“ Electr. Digital Caliper • IP67

DIN 862



NEW

- professional standard caliper
- water and coolant proof acc. to DIN 40050 / IEC 60529
- with integrated Bluetooth® technology (max. 5m distance)

- mechanic parts stainless, hardened steel
- large LCD display with clear reading, digit height 13 mm
- Absolute-System, with "ORIGIN"-system
- measuring jaws finely ground and lapped
- On/Off-button, with fixing screw, with thumbroll
- mm/inch switchable, zero-setting at any position
- incl. 2x 3 V battery (type CR2032, art.-no. 90112), with operation manual

Option

- data transfer via Bluetooth®, art.-no.: 2023106, see page 334

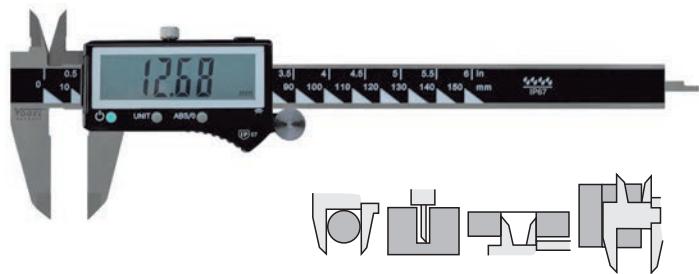

ART No	mm / inch	mm / inch	mm	mm	mm	mm	mm	CC
202420-2	150 / 6	0.01 / 0.0005	0.01	0.02	40	16.5	flat	on request
202421-2	200 / 8	0.01 / 0.0005	0.01	0.02	50	19.5	flat	on request
202422-2	300 / 12	0.01 / 0.0005	0.01	0.03	60	20.5	flat	on request

Electr. Digital Caliper • IP54

DIN 862

- standard caliper
- with glass rail for more accuracy
- spray water proof acc. to DIN 40050 / IEC 60529

- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped, with fixing screw
- On/Off button, with ABS/INC measuring system
- graduation in mm or inch, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no. 90112), with operation manual



ART No	mm / inch	mm / inch	mm	mm	mm	mm	mm	CC
202160-2	150 / 6	0.01 / 0.0005	0.01	0.02	40	16	flat	on request
202161-2	200 / 8	0.01 / 0.0005	0.01	0.03	50	19.5	flat	on request
202162-2	300 / 12	0.01 / 0.0005	0.01	0.03	60	20.5	flat	on request

Electr. Digital Caliper


DIN 862

- standard caliper
- with glass rail for more accuracy
- housing with metal cover and metal buttons
- with data output (mini USB)

- sturdy quality, stainless steel, hardened
- with or without thumbroll (included, for self installation)
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped
- On/Off-button, with flat or round depth gauge
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Option

- data transfer via cable, art.-no.: 209001, see page 334

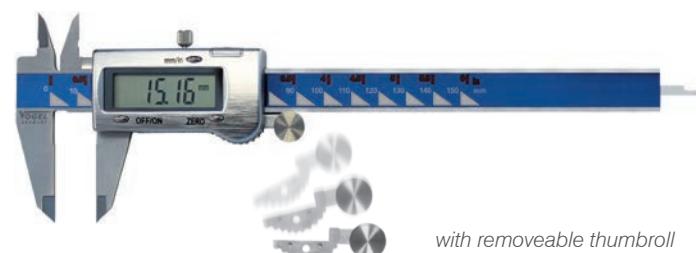

with removable thumbroll



ART No	mm / inch	mm / inch	mm	mm	mm	mm	mm	CC
202040-3	150 / 6	0.01 / 0.0005	0.01	0.02	40	16.5	flat	on request
202041-3	200 / 8	0.01 / 0.0005	0.01	0.03	50	19.5	flat	on request
202042-3	300 / 12	0.01 / 0.0005	0.01	0.03	60	20.5	flat	on request
202043-3	150 / 6	0.01 / 0.0005	0.01	0.02	40	16.5	round	on request

Precision Digital Calipers

Electr. Digital Caliper

DIN 862



- standard caliper
- with extrem large LCD display

- mechanic parts stainless steel, hardened
- large LCD display with clear reading, digit height 15 mm
- measuring jaws finely ground and lapped
- On/Off-button, with fixing screw
- mm/inch/frac in inch switchable, Zero-setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual




ART No 202011-3

with removable thumbroll



display with fraction number in inch



ART No	mm / inch	mm / inch	mm	mm	mm	mm	mm	CC
202011-3	150 / 6	0.01 / 0.0005	0.01	0.03	40	16.5	flat	on request
202012-3	200 / 8	0.01 / 0.0005	0.01	0.03	50	19.5	flat	on request
202013-3	300 / 12	0.01 / 0.0005	0.01	0.04	60	20.5	flat	on request

Electr. Digital Caliper

DIN 862

- jaws and measuring tips with carbide
- with metal cover and metal buttons
- with data output (mini USB)



- sturdy quality, stainless steel, hardened
- with or without thumbroll (included, for self installation)
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped, with fixing screw
- On/Off button
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Option

- data transfer via cable, art.-no.: 209001, see page 334



with removable thumbroll





ART No	mm / inch	mm / inch	mm	mm	mm	mm	mm	CC
202020-3	150 / 6	0.01 / 0.0005	0.01	0.03	40	16.5	flat	on request

Electr. Digital Caliper

DIN 862

- with metal housing and metal buttons

- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 8 mm digit height
- jaws finely ground and lapped, with fixing screw
- On/Off button
- mm/inch switchable, zero setting at any position
- incl. 2x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual



ART No	mm / inch	mm / inch	mm	mm	mm	mm	mm	CC
202140	100 / 4	0.01 / 0.0005	0.01	0.02	30.5	12.5	flat	on request

Electr. Digital Caliper NEW

DIN 862

- with metal housing and metal buttons
- standard model for larger measuring range
- with data output (mini USB)
- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped, with fixing screw and fine adjustment
- On/Off button, with ABS/INC measuring system
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Option

- data transfer via cable, art.-no. 209001, see page 334



ART No	mm / inch	mm / inch	mm	mm	mm	mm	mm
202065	400 / 16	0.01 / 0.0005	0.01	0.05	100	45	on request
202066	500 / 20	0.01 / 0.0005	0.01	0.05	100	45	on request
202067	600 / 24	0.01 / 0.0005	0.01	0.05	100	45	on request
202068	800 / 32	0.01 / 0.0005	0.01	0.06	125	60	on request
202069	1000 / 40	0.01 / 0.0005	0.01	0.07	125	60	on request

Electr. Digital Caliper NEW


DIN 862

for left hand use

- stainless, hardened
- large LCD display with clear reading, 10 mm digit height
- jaws finely ground and lapped
- On/Off button, with flat depth gauge
- mm/inch switchable, zero setting at any position
- incl. 1x 1.5 V battery (type LR 44, art.-no.: 90213), with operating manual

Option

- data transfer via cable, art.-no.: 209001 see page 334



ART No	mm / inch	mm / inch	mm	mm	mm	mm	
202037	150 / 6	0.01 / 0.0005	0.01	0.03	40	16.5	flat
202038	200 / 8	0.01 / 0.0005	0.01	0.03	50	19.5	flat

Electr. Digital Caliper NEW

DIN 862

made of carbon fiberglass, non-conductive and especially made for electronic and sensitive purposes, like food sector and automotive parts

- large LCD display with clear reading, 13 mm digit height
- autom. On/Off
- mm/inch switchable, zero setting at any position
- art.-no. 202202 without depth gauge, made of carbon fibreglass
- art.-no. 202203 with flat depth gauge, made of carbon fibreglass
- incl. 1x 1,5 V battery (type LR44, art.-no.: 90213), with operation manual




ART No	mm / inch	mm / inch	mm	mm	mm	mm	
202202	100 / 4	0.01 / 0.0005	0.01	0.02	30	12	—
202203	150 / 6	0.01 / 0.0005	0.01	0.02	40	16	flat

Precision Digital Calipers

Electr. Digital Caliper

- for standard requirements
- mechanic in stainless steel, hardened
- with thumbroll
- large LCD display with clear reading, 13 mm hight
- jaws finely ground and lapped, flat depth gauge
- On/Off button, mm/inch, zero setting at any position
- incl. 1x 1.5 V battery (type LR44, art.-no.: 90213)



ART NO	mm / inch	mm / inch	mm	mm	mm	mm	flat	CC
202002	150 / 6	0.01 / 0.0005	0.01	0.03	40	16	flat	on request

Electr. Digital Pointed Caliper

- to measure narrow groove widths etc.
- with metal cover and metal button
- with data output (mini USB)



- sturdy quality, stainless steel, hardened
- with or without thumbroll (included, for self installation)
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped
- On/Off button, with flat depth gauge
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Option

- data transfer via cable, art.-no.: 209001, see page 334



with removeable thumbroll

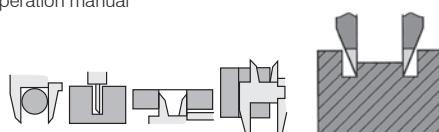

ART NO	mm / inch	mm / inch	mm	mm	mm	mm	flat	CC
202025	150 / 6	0.01 / 0.0005	0.01	0.03	40	16	flat	on request

Electr. Digital Splines Caliper

- to measure narrow grooves
- with metal cover and metal button
- with data output (mini USB)



- sturdy quality, stainless steel, hardened
- with or without thumbroll (included, for self installation)
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped
- On/Off button, with flat depth gauge
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Option

- data transfer via cable, art.-no.: 209001, see page 334



with removeable thumbroll



ART NO	mm / inch	mm / inch	mm	mm	mm	mm	flat	CC
202026	150 / 6	0.01 / 0.0005	0.01	0.03	40	16.5	flat	on request

You can't find the right caliper?
We are happy to help you to find a solution.

Electr. Digital Special Caliper



- to measure especially deep grooves
- with metal cover and metal button
- with data output (mini USB)
- sturdy quality, stainless steel, hardened
- with or without thumbroll (included, for self installation)
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped
- On/Off button, with flat depth gauge
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Option

- data transfer via cable, art.-no.: 209001, see page 334



with removable thumbroll

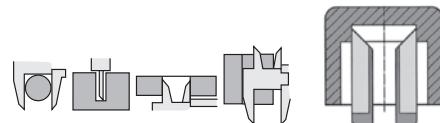

ART NO	mm / inch	mm / inch	mm	mm	mm	mm	CC
202027	150 / 6	0.01 / 0.0005	0.01	0.04	40	45	flat on request


Accessories for Digital Calipers

- for many purposes

- 6 pairs of different probes
- 2 adapter pairs, different sizes
- with measuring force system (for permanent uniform pressure)
- for calipers up to 300 mm



measuring force testing system

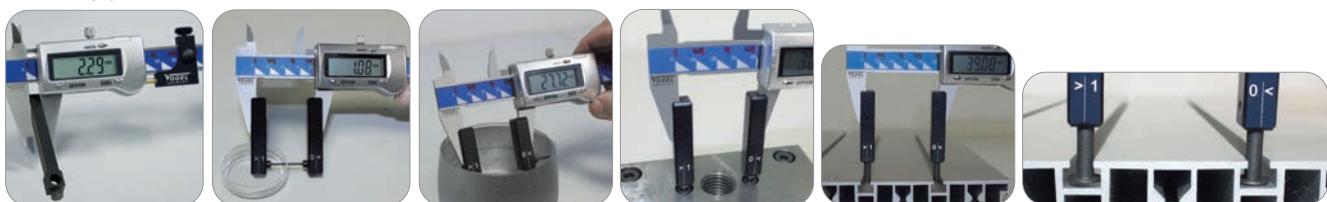

ART NO



209333

description

Accessories for Digital Calipers

Measuring Bridge

- for depth measuring
- for all pocket vernier calipers up to 200 mm
- stainless steel, hardened
- with fixing screw

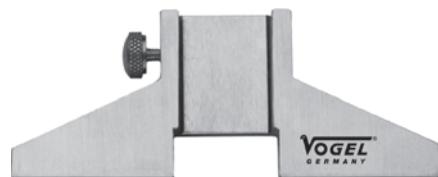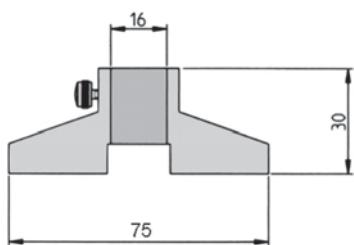

ART NO

2002092



75




Precision Pocket Vernier Calipers

Precision Pocket Vernier Caliper


DIN 862

- professional standard caliper

- stainless steel, hardened
- reading in mm/inch, scale laser engraved
- reading satin chrome finish
- jaws fine ground and lapped
- mono-block vernier
- flat depth gauge



ART No 201033

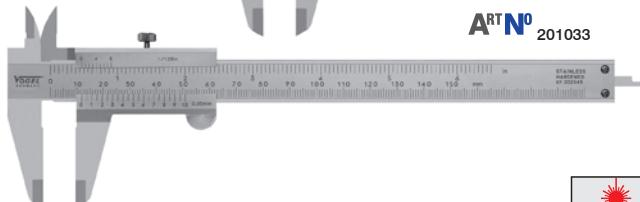

ART No

type



201023

thumb locking

150 / 6

0.05

1/128

40

16

flat

on request

201033

fixing screw

150 / 6

0.05

1/128

40

16

flat


on request

Pocket Vernier Caliper

DIN 862

- standard caliper


- stainless steel, hardened
- reading in mm/inch, scale laser engraved
- reading satin chrome finish
- jaws fine ground and lapped
- mono-block vernier
- flat or round depth gauge



ART No 201021



ART No 201031



ART No

ART No

fixing screw



201021

thumb locking

150 / 6

0.05

1/128

40

16

flat

on request

201022

thumb locking

150 / 6

0.05

1/128

40

16

round

on request

201024

thumb locking

200 / 8

0.05

1/128

50

19

flat

on request

201025

thumb locking

150 / 6

0.02

1/1000

40

16

flat

on request

201026

thumb locking

200 / 8

0.02

1/1000

40/50

16/19

flat

on request

—

fixing screw

200 / 8

0.05

1/128

40

16

round

on request

—

fixing screw

300 / 12

0.05

1/128

60

20

flat

on request

—

fixing screw

300 / 12

0.02

1/1000

64

20

flat

on request

Did you already know?

Join us for success is now

Measuring Solutions

The new slogan stands for even more Service, Solutions and Consulting.

VOGEL®
GERMANY
Measuring Solutions


Precision Pocket Vernier Calipers

Pocket Vernier Caliper

DIN 862

- professional standard caliper

- inox, hardened
- graduation in mm/inch, scale etched
- reading satin chrome finish, flat depth gauge
- jaws finely ground and lapped



ART No 201020-2

ART No 201030-2

mm

DIN

mm/inch

INOX



ART No
thumb locking

ART No
fixing screw

mm / inch

mm
bottom

inch
top

mm

mm

flat




201020-2

201030-2

150 / 6

ART No 201052

ART No 201051



with double-prism guide

DIN

mm/inch

INOX



ART No
thumb locking

ART No
fixing screw

mm / inch

mm
bottom

inch
top

mm

mm

CC

201052

201051

150 / 6

0.05

1/128

40

16

flat


on request

Pocket Vernier Caliper

DIN 862

- for DIY requirements

- reading in mm/cm
- reading satin chrome finish
- hardened
- jaws fine ground
- with fixing screw
- flat depth gauge



ART No

mm

mm

mm

mm

mm

flat

201005

150

0.02

40

16


Pocket Vernier Calipers

Pocket Vernier Caliper

DIN 862

- with tungsten carbide measuring jaws and tips

- stainless steel, hardened
- graduation in cm/inch, laser engraved scale
- scale and vernier satin chrome finish
- jaws finely ground and lapped
- mono block vernier



DIN **INOX** **cm/inch**


ART No	mm / inch	mm bottom	inch top	mm	mm	flat	CC
201039	150 / 6	0.05	1/128	40	16		on request

Pocket Vernier Caliper

DIN 862

- with thumb locking
- for left-handed use

- stainless steel, hardened
- graduation in mm/inch, laser engraved scale
- scale and vernier satin chrome finish
- jaws finely ground and lapped
- mono block vernier



mm/inch **INOX** **DIN**



ART No	mm / inch	mm bottom	inch top	mm	mm	flat	CC
201027	150 / 6	0.05	1/128	40	16		on request

Pocket Vernier Caliper

acc. to workshop grade

- with fine adjustment and long jaws

- stainless steel, hardened
- graduation in mm/inch, laser engraved scale
- scale and vernier satin chrome finish
- jaws finely ground and lapped
- mono block vernier
- with fine adjustment

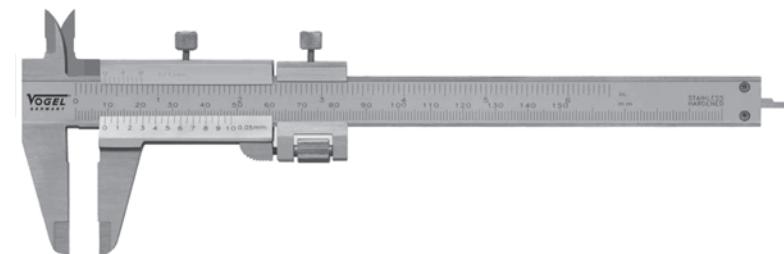

mm/inch **INOX** **NORM**

ART No	mm / inch	mm bottom	inch top	mm	mm	flat	CC
201063	130 / 5	0.02	1/1000	40	16.5		on request

Precision Dial Calipers and Small Pocket Vernier Calipers

Dial Caliper • IP40



DIN 862

- economic model, shock proof mechanics
- for fast and accurate reading

- stainless steel, hardened
- measuring rail matt chrome finish, laser engraved scale
- jaws finely ground and lapped
- dust proof housing, flat depth gauge
- with thumb roll for fine adjustment
- with fixing screw



ART No 201101

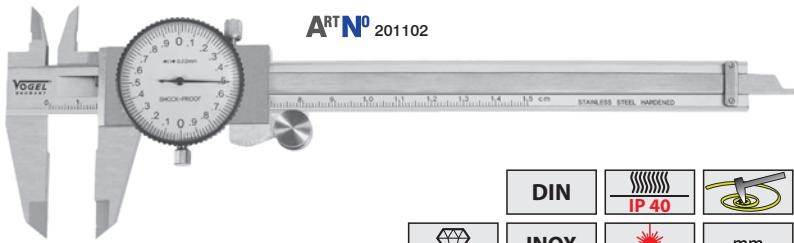

ART No 201102



ART No	mm	mm	mm	mm	mm	mm	CC
201101	150	0.01	1	40	16.5	flat	on request
201108	200	0.01	1	48	19.5	flat	on request
201109	300	0.01	1	62	22.0	flat	on request
201102	150	0.02	2	40	16.5	flat	on request
201103	200	0.02	2	48	19.5	flat	on request
201104	300	0.02	2	62	22.0	flat	on request

Small Pocket Vernier Caliper

DIN 862

- for crafts, also very popular promotional item



- stainless steel, hardened
- scale and vernier satin chrome finish, laser engraved scale
- jaws finely ground and lapped
- with fixing screw



ART No 201009



ART No 201010



ART No	mm	mm	mm	mm	mm	CC
201009	70	0.05	20	9	flat	on request
201010	100	0.05	30	13	flat	on request

Precision Digital Workshop Calipers

Electr. Digital Workshop Caliper

NEW

acc. to workshop grade

- modern design, lightweight model

- solid shape, made of anodized hard aluminium
- stainless, hardened jaws and Inside measuring approaches
- with two adjustable, exchangeable measuring jaws
- LCD display with clear reading, digit height 10 mm
- On/Off button, mm/inch switchable, „0“ setting at any position, ABS system
- for inside and outside measurements (PRESET)
- slides perfectly because of double-prismatic-lead
- slide rail made of oxide coated aluminium
- with measuring force limitation for permanent uniform pressure
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Options

- art.-no. 207154-01: pair of measuring jaws, jaw length 90mm changeable, contact points at the lower ends, thread M 2.5
- art.-no. 207154-02: setting gauge
- art.-no. 207154-03: holder for probes

Probes are shown
on page 168




setting gauge
art.-no.: 207154-02



interchangeable
measuring jaws
art.-no.: 207154-01



holder for probes
art.-no.: 207154-03

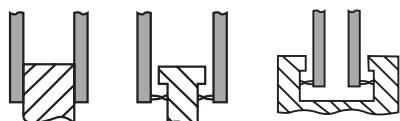

ART N°

mm / inch



mm / inch

mm

mm

mm

mm

mm

mm

207150

300 / 12

0.01 / 0.0005

0.01

0.04

90

35

10

on request

207151

500 / 20

0.01 / 0.0005

0.01

0.05

90

35

10

on request

207152

800 / 32

0.01 / 0.0005

0.01

0.06

90

35

10

on request

207153

1000 / 40

0.01 / 0.0005

0.01

0.06

90

35

10

on request

Electr. Digital Workshop Caliper

NEW

acc. to Workshop grade

- for simple workshop use
- modern design, lightweight model

- solid shape, made of anodized hard aluminium
- stainless, hardened jaws and Inside measuring approaches
- with two adjustable, exchangeable measuring jaws
- LCD display with clear reading, digit height 10 mm
- On/Off push button, mm/inch switchable, „0“ setting on each position, ABS system
- for inside and outside measurements (PRESET)
- perfectly sliding sliding parts thanks to plastic bearings double prism guide
- slide rail made of aluminium oxide coated
- with measuring force limitation for permanent uniform pressure
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112) with operation manual

Option

- art.-no. 207159-0: pair of measuring jaws, jaw length 150 mm interchangeable, contact points at the lower ends, thread M 2.5
- art.-no. 207154-02: setting gauge
- art.-no. 207154-03: holder for probes



setting gauge
(art.-no.: 207154-02)



Interchangeable
measuring jaws
(art.-no.: 207159-01)



holder for probes
(art.-no.: 207154-03)



ART N°

mm / inch



mm / inch

mm

mm

mm

mm

mm

207155

1500 / 60

0.01 / 0.0005

0.01

0.10

150

20

on request

207156

2000 / 80

0.01 / 0.0005

0.01

0.13

150

20

on request

207157

2500 / 100

0.01 / 0.0005

0.01

0.20

150

20

on request

207158

3000 / 120

0.01 / 0.0005

0.01

0.25

150

20

on request


Precision Digital Workshop Calipers

Electr. Digital Workshop Caliper • IP66

acc. to workshop grade

- water and coolant proof acc. to DIN 40050 / IEC 60529


- stainless steel, hardened
- large LCD display with clear reading, digit height 11 mm
- jaws finely ground and lapped
- offset jaws for inside measurements
- On/Off button, automatic shutdown, mm/inch switchable
- zero setting at any position, with REL-, ABS- and PRESET-mode
- function buttons made of metal
- with fine adjustment, with or without knife points
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual



ART NO	mm / inch	mm / inch	mm	mm	mm	mm	mm	mm	CC
207040	500 / 20	0.01 / 0.0005	0.01	0.06	100	56	20	on request	
207041	500 / 20	0.01 / 0.0005	0.01	0.06	150	56	20	on request	
207140	500 / 20	0.01 / 0.0005	0.01	0.06	100	—	20	on request	
207141	500 / 20	0.01 / 0.0005	0.01	0.06	150	—	20	on request	
207144	800 / 32	0.01 / 0.0005	0.01	0.07	150	—	20	on request	
207145	800 / 32	0.01 / 0.0005	0.01	0.07	200	—	20	on request	
207146	1000 / 40	0.01 / 0.0005	0.01	0.07	150	—	20	on request	
207147	1000 / 40	0.01 / 0.0005	0.01	0.08	200	—	20	on request	
207048	1000 / 40	0.01 / 0.0005	0.01	0.07	150	67	20	on request	
207049	1000 / 40	0.01 / 0.0005	0.01	0.08	200	67	20	on request	

Important components of a mechanical caliper

- 1) measuring jaws for external measurement
- 2) measuring tips for inside measurement
- 3) vernier slide
- 4) vernier
- 5) measurement rail with scale
- 6) locking screw
- 7) depth gauge
- 8) measuring surface for depth measurement

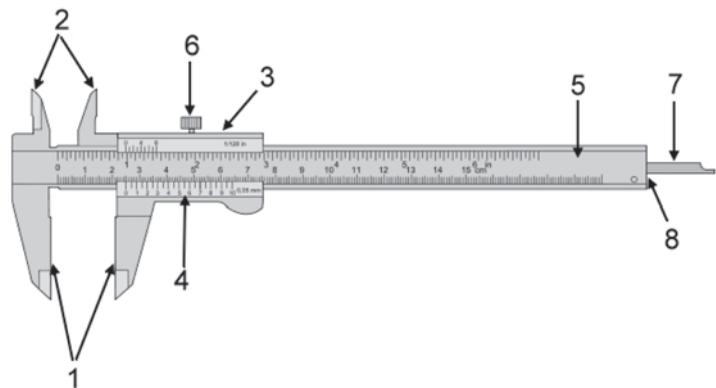

Precision Digital Workshop Calipers

„Absolute“ Electr. Digital Workshop Caliper • IP54


acc. to workshop grade

• water- and coolant proof acc. 40050 / IEC 60529

- large LCD display with clear reading, 11 mm digit height
- mechanic parts, stainless steel, hardened
- measuring jaws finely ground and lapped
- offset jaws for inside measurements
- with PRESET/ORIGIN/ABS/INC-system
- On/Off button, mm/inch switchable
- zero-setting at any position, DATA HOLD function
- with fine adjustment, with or without knife points
- incl. 2x 3 V batteries (type CR2032, art.-no.: 90112), with operation manual

Options

- data transfer via cable, art.-no.: 2420194, see page 334
- data transfer via WiFi, art.-no.: 2040101, see page 334
- data transfer via Bluetooth®, art.-no.: 2023106 + 209000, see page 334

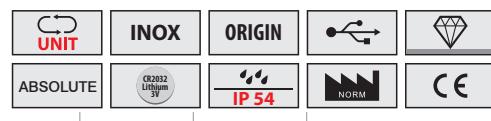

ART No	mm / inch	mm / inch	mm	max. mm	mm	mm	mm	ø mm	CC
207030	300 / 12	0.01 / 0.0005	0.01	0.03	90	38	—	10	on request
207031	500 / 20	0.01 / 0.0005	0.01	0.05	150	60	—	20	on request
207032	1000 / 40	0.01 / 0.0005	0.01	0.06	150	63	—	20	on request
207130	300 / 12	0.01 / 0.0005	0.01	0.03	90	—	—	10	on request
207131	500 / 20	0.01 / 0.0005	0.01	0.05	150	—	—	20	on request
207132	1000 / 40	0.01 / 0.0005	0.01	0.06	150	—	—	20	on request

Electr. Digital Workshop Caliper

acc. to workshop grade

- with two moveable, exchangeable jaws
- modern design, lightweight model, made of anodized hard aluminium

- stainless, hardened measuring jaws and tips
- jaws finely ground
- with two adjustable, exchangeable measuring jaws
- LCD display with clear reading, digit height 10 mm
- On/Off button, mm/inch switchable, zero setting at any position
- slides perfectly because of double-prismatic-lead
- rail and electronic housing made of anodized aluminium
- incl. 1x 1.5 V battery (type LR44, art.-no. 90213), with operation manual

Options

- art.-no. 200891: measuring jaw-pair, jaw length 125 mm, exchangeable
- art.-no. 200892: measuring jaw-pair, jaw length 150 mm, exchangeable



measuring jaw-pair



ART No	mm / inch	mm / inch	mm	max. mm	mm	mm	mm	ø mm	CC
200880	300 / 12	0.01 / 0.0005	0.01	0.04	90	40	—	10	on request
200881	500 / 20	0.01 / 0.0005	0.01	0.05	90	40	—	10	on request
200882	800 / 32	0.01 / 0.0005	0.01	0.06	90	40	—	10	on request


Precision Workshop Calipers

Workshop Caliper


DIN 862 or in special sizes acc. to workshop grade

precision class

- stainless steel, hardened
- scale and vernier satin chrome finish, laser engraved scale
- jaws finely ground
- offset jaws for inside measurements
- with or without fine adjustment, without knife points
- with fixing screw
- mono block vernier
- with identification number
- 0 – 600 mm R mm-pitch
- < 600 mm R cm-pitch

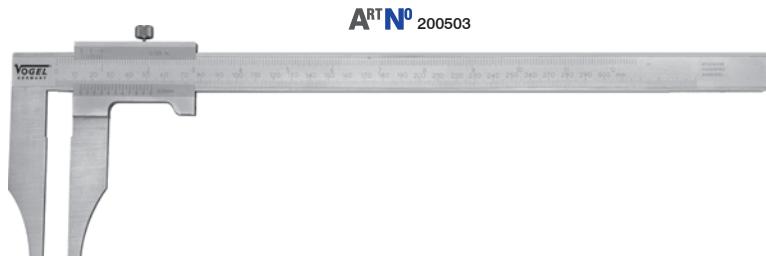

ART NO 200533

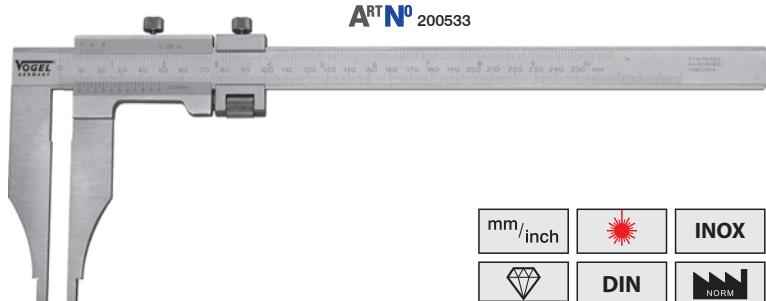

ART NO	ART NO	mm / inch	bottom mm	top inch	mm	mm	mm	CC
200501	200531	200 / 8	0.05	1/128	65	—	10	on request
200502	200532	250 / 10	0.05	1/128	80	—	10	on request
200503	200533	300 / 12	0.05	1/128	100	—	10	on request
—	200533-1	300 / 12	0.05	1/128	150	—	20	on request
200504	200534	400 / 16	0.05	1/128	100	—	20	on request
200505	200535	500 / 20	0.05	1/128	150	—	20	on request
—	200535-1	500 / 20	0.05	1/128	200	—	20	on request
200505-2	200535-2	500 / 20	0.05	1/128	300	—	20	on request
200506	200536	600 / 24	0.05	1/128	150	—	20	on request
—	200536-1	600 / 24	0.05	1/128	200	—	20	on request
—	200536-2	600 / 24	0.05	1/128	300	—	20	on request
200508	200538	800 / 32	0.05	1/128	150	—	20	on request
—	200538-1	800 / 32	0.05	1/128	200	—	20	on request
—	200538-2	800 / 32	0.05	1/128	300	—	20	on request
200510	200540	1000 / 40	0.05	1/128	150	—	20	on request
—	200541	1000 / 40	0.05	1/128	200	—	20	on request
—	200542	1000 / 40	0.05	1/128	300	—	20	on request
—	200543	1000 / 40	0.05	1/128	500	—	20	on request
—	200551	1250 / 50	0.05	1/128	200	—	20	on request
200512	200552	1500 / 60	0.05	1/128	200	—	20	on request
—	200552-1	1500 / 60	0.05	1/128	300	—	20	on request
200513	200553	2000 / 80	0.05	1/128	200	—	20	on request
—	200553-1	2000 / 80	0.05	1/128	300	—	20	on request
200514	200554	2500 / 100	0.05	1/128	200	—	20	on request
200515	200555	3000 / 120	0.05	1/128	200	—	20	on request
—	200555-1	3000 / 120	0.05	1/128	300	—	20	on request

Workshop Calipers

Workshop Caliper


DIN 862 or in special sizes acc. to workshop grade

precision class


- stainless steel, hardened
- scale and vernier satin chrome finish, laser engraved scale
- jaws finely ground
- offset jaws for inside measurements
- with or without fine adjustment, with knife points
- with fixing screw
- mono block vernier



ART No 200602

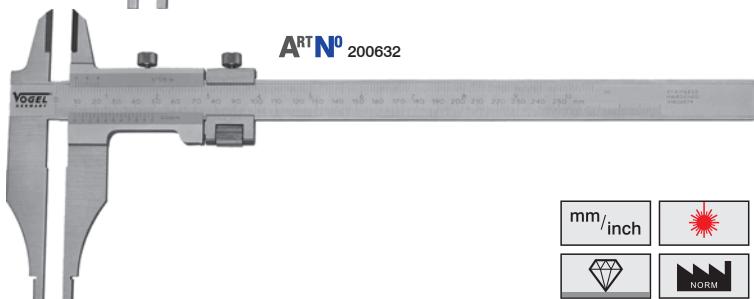

ART No 200632




ART No	ART No	mm / inch	bottom mm	top inch	mm	mm	mm	ø mm	CC
200601	200631	200 / 8	0.05	1/128	65	32	32	10	on request
200602	200632	250 / 10	0.05	1/128	80	32	32	10	on request
200603	200633	300 / 12	0.05	1/128	100	32	32	10	on request
200604	200634	400 / 16	0.05	1/128	125	56	56	10	on request
200605	200635	500 / 20	0.05	1/128	150	67	67	20	on request
200606	200636	600 / 24	0.05	1/128	150	67	67	20	on request
200608	200638	800 / 32	0.05	1/128	150	67	67	20	on request
200610	200640	1000 / 40	0.05	1/128	150	67	67	20	on request
200612	200652	1500 / 60	0.05	1/128	200	80	80	20	on request
200613	200653	2000 / 80	0.05	1/128	200	80	80	20	on request
200614	200654	2500 / 100	0.05	1/128	200	80	80	20	on request
200615	200655	3000 / 120	0.05	1/128	200	80	80	20	on request
200616	200656	3000 / 120	0.05	1/128	300	80	80	20	on request
200617	200657	3500 / 140	0.05	1/128	200	80	80	20	on request
200618	200658	3500 / 140	0.05	1/128	300	80	80	20	on request

Workshop Caliper

DIN 862

- parallaxfree finished, with flat vernier
- with exchangeable jaws
- modern design, lightweight model, made of anodized hard aluminium

- stainless, hardened measuring jaws and tips
- jaws finely ground
- good contrast because of white scaling on black surface
- reading in mm and inch
- slides perfectly because of double-prismatic-lead
- rail and housing made of anodized aluminium
- with operation manual

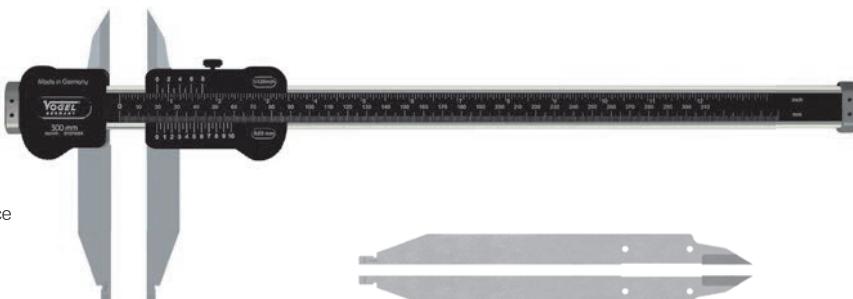

measuring jaw-pair

Options


- art.-no. 200890: measuring jaw-pair, jaw length 90 mm, exchangeable
- art.-no. 200891: measuring jaw-pair, jaw length 125 mm, exchangeable
- art.-no. 200892: measuring jaw-pair, jaw length 150 mm, exchangeable



ART No	mm / inch	mm bottom	inch top	mm	mm	mm	ø mm	CC
200831	300 / 12	0.05	1/128	90	40	40	10	on request
200832	500 / 20	0.05	1/128	90	40	40	10	on request
200833	700 / 28	0.05	1/128	90	40	40	10	on request
200834	900 / 36	0.05	1/128	90	40	40	10	on request



HIGH PRECISION
LASERCENTER

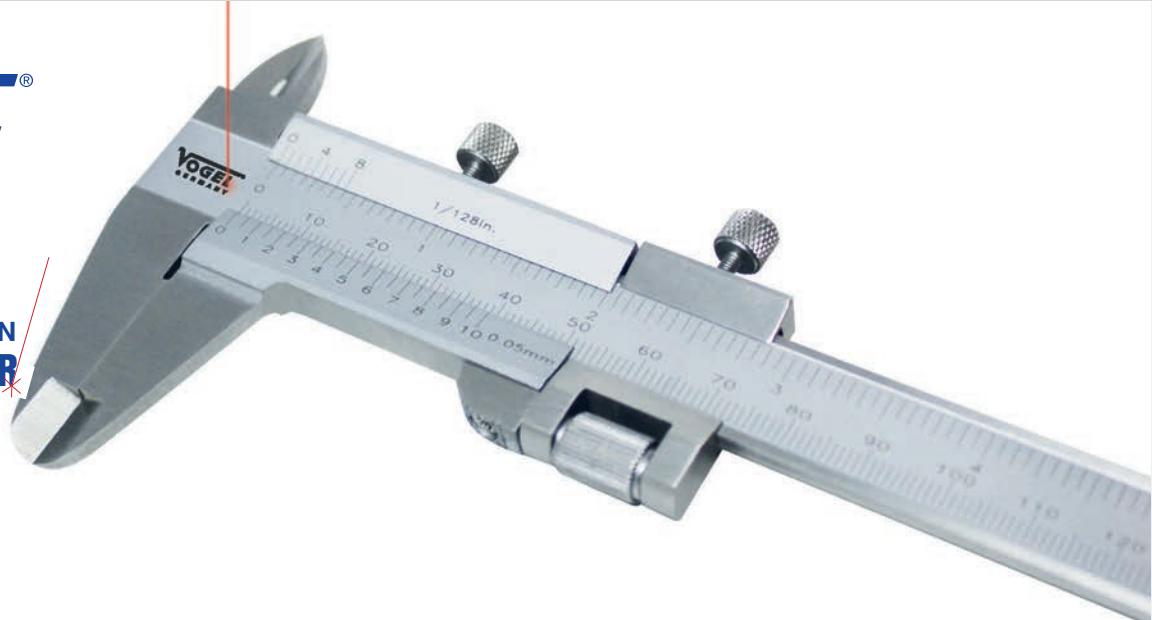

Modern technologies for high precision

Special scales, your logotypes, pictures, drafts etc.
There is nothing impossible.

Laser engraving has a lot of advantages.
One is the top quality, high accuracy and the long-life cycle.

Flexibility is an asset of Vogel Germany for your needs because manufacturing is on a low cost level.



Laser engravings are possible on:

- ✓ steel, high-grade steel, stainless steel
- ✓ cast iron
- ✓ non-ferrous metal
- ✓ special plastic material

Groove Caliper

„Absolute“ Digital Caliper for Inside or Outside Grooves • IP54

DIN 862


- art.-no. 201082 – 201084 for inside groove measurement
- art.-no. 201096 – 201098 for outside groove measurement
- top model for industry purposes
- with glass rail for more accuracy
- spray water proof acc. to DIN 40050 / IEC 60529
- with data output, top model
(connectivity also for Digimatic measuring devices)
- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped, with fixing screw
- On/Off button, with „ORIGIN“ system, with thumbroll
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Options


- data transfer via cable, art.-no.: 2420194, see page 334
- data transfer via WiFi, art.-no.: 2040101, see page 334
- data transfer via Bluetooth®, art.-no.: 2023106 + 209000, see page 334



ART N° 201082

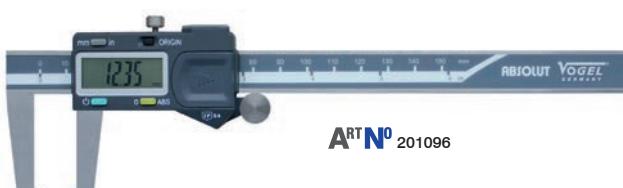

ART N° 201096


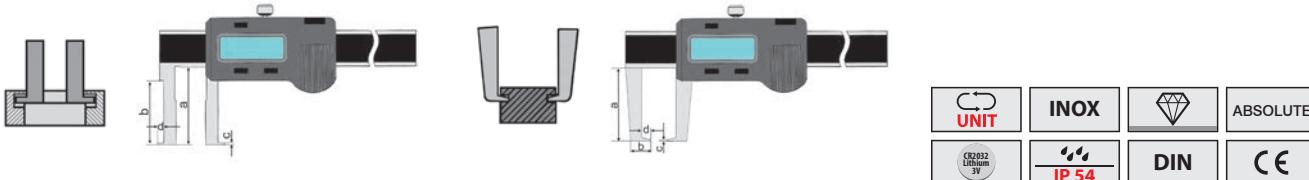


ART N°	type	mm / inch	mm / inch	mm	mm / inch	A mm	B mm	C mm	D mm
201082	inside	20 – 150 / 0 – 6	0.01 / 0.0005	0.01	0.03 / 0.0015	36	15	1	6
201083	inside	25 – 200 / 0 – 8	0.01 / 0.0005	0.01	0.03 / 0.0015	36	15	1	6
201084	inside	30 – 300 / 0 – 12	0.01 / 0.0005	0.01	0.04 / 0.002	56	15	1	6
201096	outside	0 – 150 / 0 – 6	0.01 / 0.0005	0.01	0.03 / 0.0015	40	15	1	5
201097	outside	0 – 200 / 0 – 8	0.01 / 0.0005	0.01	0.03 / 0.0015	50	19.5	1.8	7
201098	outside	0 – 300 / 0 – 12	0.01 / 0.0005	0.01	0.04 / 0.002	60	21	1.8	8

Groove Caliper

to measure groove dimensions

- stainless steel, hardened
- scale and vernier satin chrome finish, laser engraved scale
- with fixing screw

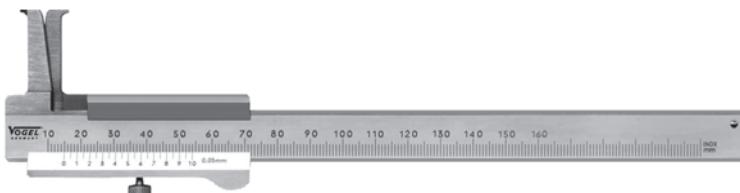



ART N°	mm	mm	A mm	B mm	H1 mm	CC
201075	10 – 160	0.05	0.9	3.0	25	on request
201076	20 – 160	0.05	2.0	5.0	40	on request
201077	26 – 200	0.05	3.0	7.0	60	on request
201085	30 – 250	0.05	4.0	8.5	80	on request
201086	35 – 300	0.05	5.0	10.0	105	on request

Electr. Digital Brake Disc Caliper

acc. to workshop grade

• fast and easy measurement of the brake disc thickness

- stainless steel, hardened
- LCD display with clear reading, digit height 9 mm
- conical, hardened knife points
- zero setting at any position, mm/inch switchable
- On/Off button, with HOLD function
- fixing screw
- incl. 2x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual



ART No

mm / inch
mm / inch

mm / inch
mm / inch

mm
mm

A
mm

C
mm

CC

206020

60 / 2.4

0.01 / 0.0005

0.01

0.04

158

50



on request

Electr. Digital Brake Disc Caliper

acc. to workshop grade

• fast and easy measurement of the brake disc thickness

- stainless steel, hardened
- LCD display with clear reading, digit height 9 mm
- conical, hardened knife points, measuring jaws made of lacquered sheet steel
- zero setting at any position, mm/inch switchable
- depth gauge
- On/Off button, with HOLD function
- incl. 2x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual



ART No

mm / inch
mm / inch

mm / inch
mm / inch

mm
mm

A
mm

C
mm

D
mm

206021

100 / 4

0.01 / 0.0005

0.01

0.05

208

91.5



11.5

on request

Brake Disc Caliper

- with drag pointer
- for measuring the thickness of installed brake discs

- stainless steel, hardened
- scale and vernier satin chrome finish, laser engraved scale
- art.-no. 206001 with locking screw

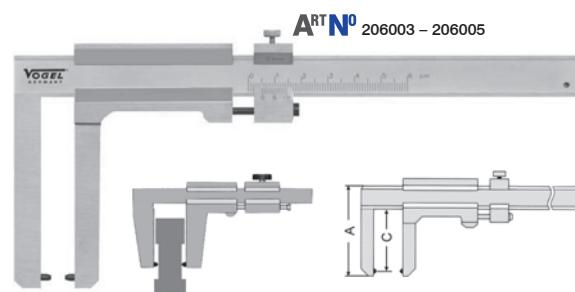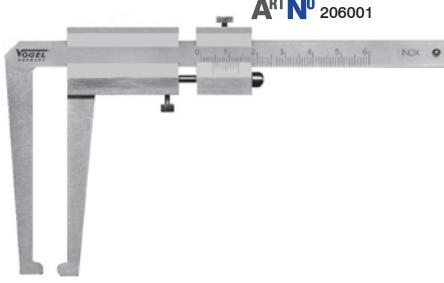

ART No

mm
mm

mm
mm

A
mm

C
mm

mm

CC

206001

0 - 60

0.10

86

74

77

on request

206003

0 - 60

0.10

67

50

55

on request

206004

0 - 60

0.10

102

79

83

on request

206005

0 - 90

0.10

142

119

120

on request

Brake Disc Caliper and Drum Calipers

Electr. Digital Brake Disc Caliper • IP54

acc. to workshop grade


NEW

- for quick and easy measurement WITHOUT removing the tires (only aluminium rims)

- mechanic in stainless steel, hardened
- LCD display with clear reading, digit height 13 mm
- conical, hardened knife points
- zero setting at any position, mm / inch / fraction switchable
- On/Off button, with HOLD function
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual



fractional display
in inches

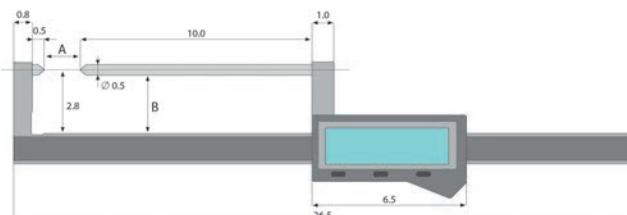



ART NO	mm / inch	mm / inch	mm	mm	A mm	B mm
206022	80 / 3.2	0.01 / 0.0005	0.02	0.02	85.1	25.5

Brake Drum Caliper

acc. to workshop grade

- for measuring internal and external diameters

- stainless steel, hardened
- scale and vernier satin chrome finish, laser engraved scale
- with fixing screw

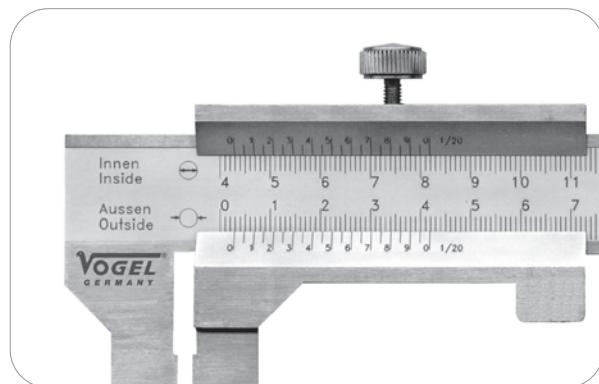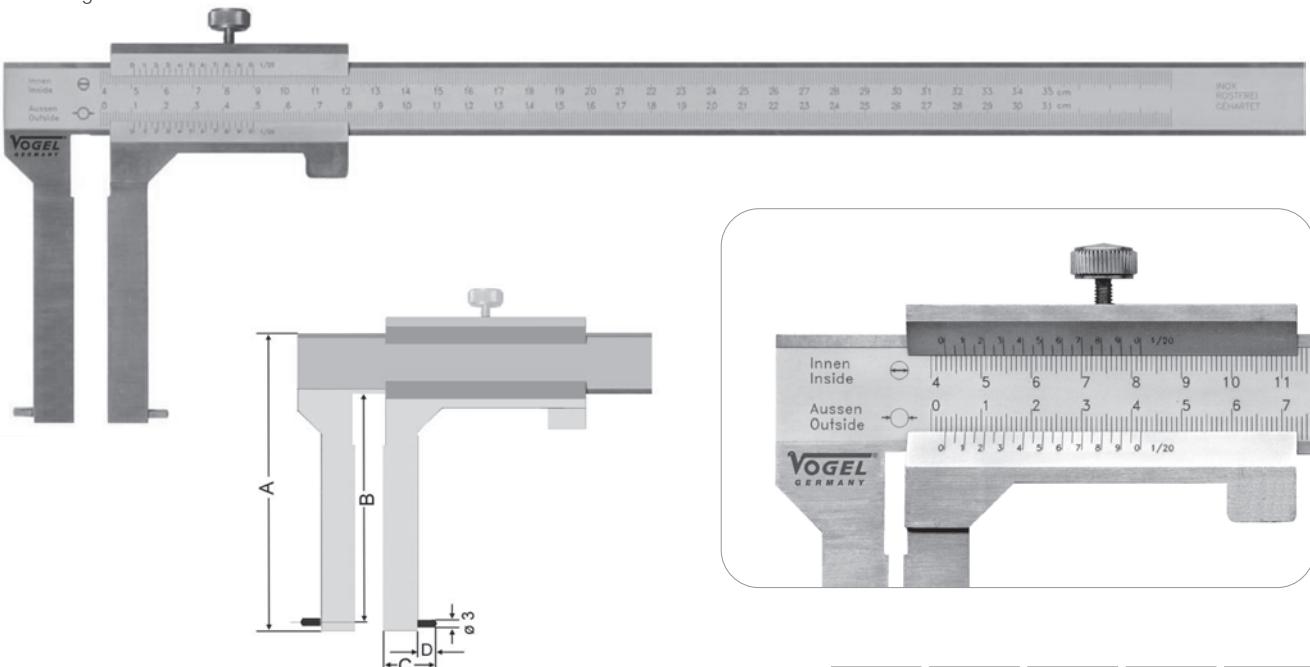



ART NO	inside mm	outside mm	mm	mm	A mm	B mm	C mm	D mm	CC
205203	40 – 300	0 – 300	0.05	93	116	90	20	7	on request
205206	50 – 500	0 – 500	0.05	153	177	150	25	9	on request

Electr. Digital Gear Teeth Caliper

acc. to workshop grade

• to measure the gear teeth at front-and helical gears, etc.

- stainless steel, hardened
- LCD display with clear reading
- carbide jaws, finely ground
- with fixing screw and fine adjustment on both sides
- On/Off button, zero setting at any position, mm/inch switchable
- incl. 2x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual

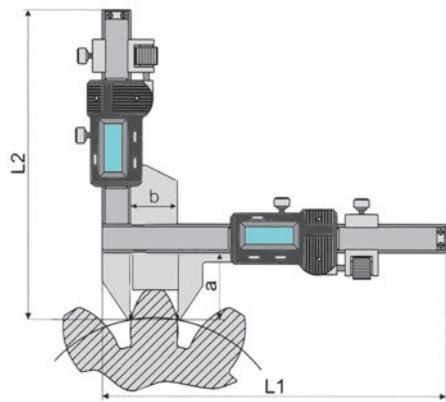

ART NO	modules mm	mm / inch	mm	mm	L1 mm	L2 mm	a mm	b mm	CC
202301	3 – 25	0.01 / 0.0005	0.01	0.03	156	156	30.5	21	on request
202302	5 – 50	0.01 / 0.0005	0.01	0.03	210	185.5	50.5	50.5	on request

Follow us on Facebook.

Never miss any news about our products, promotions and offers.



Any questions?
We are pleased to advise.

facebook.com/VogelGermany

Brass Button Gauges and Tread Depth Gauges

Brass Button Gauge

- also very popular as a promotional gift

- made of hard brass
- surface finely ground
- with dove-tail guiding, vernier reading
- promotional engraving possible on the front or rear




mm/inch NORM

ART NO round jaws	ART NO with inside measurement	mm / inch	mm	mm	mm
214001	214301	80 / 3	0.10	25 (214001)	20 (214301)
214003	214303	100 / 4	0.10	25 (214003)	20 (214303)

Brass Tread Depth Gauge

- also very popular as a promotional gift

- surface finely ground
- with dove-tail guiding, vernier reading
- promotional engraving possible on the front or rear

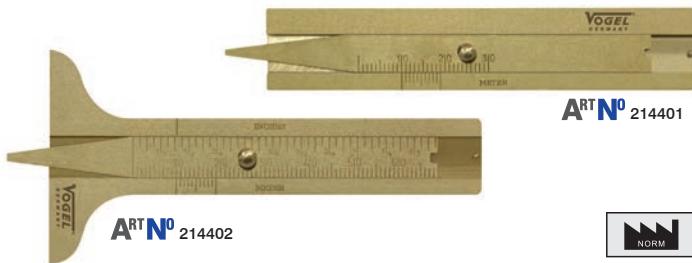

NORM

ART NO	mm / inch	mm	mm
214401	30 / 1.2	0.10	20
214402	60 / 2.4	0.10	50

Individually laser engraved articles!

We engrave special scales, trademarks, pictures, drawings, etc. according to your specifications.

Laser marking is particularly suitable for permanent, tamperproof engravings..

Thanks to our unique flexibility we can offer to our customers favourable prices for marking single pieces as well as for mass production.



Laser engraving is possible on:

- steel, high-grade steel
- cast iron
- non-ferrous metals
- plastic
- self-adhesive foils

Any questions?
We are pleased to advise!

Digital Tread Depth Gauges and Digital Depth Calipers

Electr. Digital Tread Depth Gauge

- suitable for craftsmen and industry

- large LCD display, digit height 9.5 mm
- On/Off button, zero setting at any position
- mm/inch switchable
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

oval probe tip (4.1 mm x 3.1 mm)




ABS plastic version



round probe tip (\varnothing 1.5 mm)



mechanical parts and tip
in stainless steel




ART No	mm / inch	mm / inch	mm	mm
214442	0 - 25 / 0 - 1	0.01 / 0.0005	0.03	60.0
214445	0 - 25 / 0 - 1	0.01 / 0.0005	0.03	45.0

Electr. Digital Depth Caliper • IP54

DIN 862

- standard model for industry and craft
- with glass rail for more accuracy
- spray water proof acc. to DIN 40050 / IEC 60529


- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 9 mm digit height
- stainless, hardened, with fixing screw
- On/Off button
- mm/inch switchable
- zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

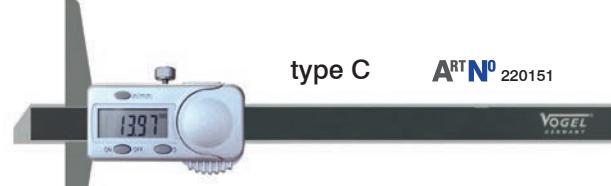


type C ART No 220151



type D ART No 220171



type E ART No 220121



type F ART No 220161



ART No	type	mm / inch	mm / inch	max.	mm	mm	type / size of measuring surface mm	CC
220151	C	150 / 6	0.01 / 0.0005	0.02	100		5.5	on request
220152		200 / 8	0.01 / 0.0005	0.03	100		5.5	on request
220153		300 / 12	0.01 / 0.0005	0.03	150		5.5	on request
220171	D	150 / 6	0.01 / 0.0005	0.02	100		6 / 3.5	on request
220172		200 / 8	0.01 / 0.0005	0.03	100		6 / 3.5	on request
220173		300 / 12	0.01 / 0.0005	0.03	150		7 / 3.5	on request
220121	E	150 / 6	0.01 / 0.0005	0.02	100		20.5 x 6.0/3.5	on request
220122		200 / 8	0.01 / 0.0005	0.03	100		20.5 x 6.0/3.5	on request
220123		300 / 12	0.01 / 0.0005	0.03	150		20.5 x 6.0/3.5	on request
220161	F	150 / 6	0.01 / 0.0005	0.02	100		\varnothing 1.5 / 7	on request
220162		200 / 8	0.01 / 0.0005	0.03	100		\varnothing 1.5 / 7	on request
220163		300 / 12	0.01 / 0.0005	0.03	150		\varnothing 1.5 / 7	on request

Digital Depth Calipers

Electr. Digital Depth Caliper • IP67

DIN 862



NEW

- with integrated Bluetooth® technology
- top model for industry purposes
- water- and coolant proof acc. to DIN 40050 / IEC 60529

- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 13 mm digit height
- jaws finely ground and lapped, with fixing screw
- On/Off button, data transfer button
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Option

- data transfer via Bluetooth®
(art.-no.: 2023106, see page 334)

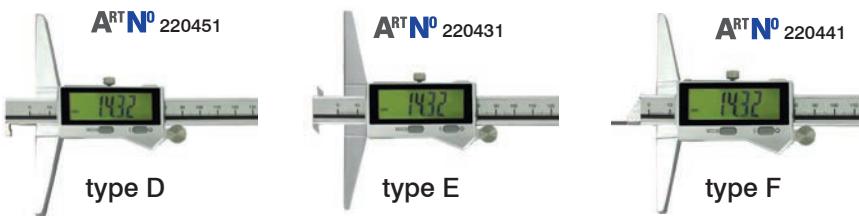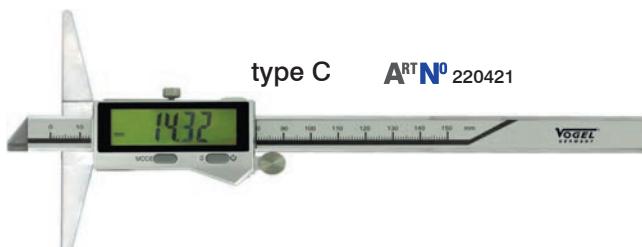

ART No.	type	mm / inch	mm	max. mm	mm / inch	Type / size of measuring surface mm	CC
220421	C	150 / 6	0.01 / 0.0005	0.03	100	5.5	on request
220422		200 / 8	0.01 / 0.0005	0.03	100	5.5	on request
220423		300 / 12	0.01 / 0.0005	0.04	150	5.5	on request
220451	D	150 / 6	0.01 / 0.0005	0.03	100	5 / 2	on request
220452		200 / 8	0.01 / 0.0005	0.03	100	5 / 2	on request
220453		300 / 12	0.01 / 0.0005	0.04	150	5 / 2	on request
220431	E	150 / 6	0.01 / 0.0005	0.03	100	26.4 / 4	on request
220432		200 / 8	0.01 / 0.0005	0.03	100	26.4 / 4	on request
220433		300 / 12	0.01 / 0.0005	0.04	150	26.4 / 4	on request
220441	F	150 / 6	0.01 / 0.0005	0.03	100	Ø 1.5 / 6	on request
220442		200 / 8	0.01 / 0.0005	0.03	100	Ø 1.5 / 6	on request
220443		300 / 12	0.01 / 0.0005	0.04	150	Ø 1.5 / 6	on request

Electr. Digital Depth Caliper

DIN 862

- with plastic housing cover

- stainless steel, hardened, measuring surface finely ground
- with fixing screw
- large LCD display with clear reading, digit height 10 mm
- On/Off button, zero setting at any position
- mm / inch switchable
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual



ART No.	mm / inch	mm / inch	max. mm	mm	type / size of measuring surface mm	CC
228251	150 / 6	0.01 / 0.0005	0.03	100	6	on request
228252	200 / 8	0.01 / 0.0005	0.03	100	6	on request
228253	300 / 12	0.01 / 0.0005	0.04	100	6	on request

Electr. Digital Depth Gauge



acc. to workshop grade

- modern design, lightweight model
- made of anodized hard aluminium
- with exchangeable measuring tips (M2.5)
- with 3 measuring bridges with different length (150 mm, 300 mm, 450 mm)

- LCD display with clear reading, digit height 10 mm
- incl. hardened measuring tips with M2.5 thread, exchangeable
- On/Off button, mm/inch switchable, zero setting at any position
- slides perfectly because of double-prismatic-lead
- rail and electronic housing made of anodized aluminium
- incl. 1x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual and hexagon-key

Spare Measuring Bridge:

- art.-no. 220890: measuring bridge, 150 mm, anodized aluminium
- art.-no. 220891: measuring bridge, 300 mm, anodized aluminium
- art.-no. 220892: measuring bridge, 450 mm, anodized aluminium
- other measuring tips with M2.5 thread, please follow on page 168 – 169

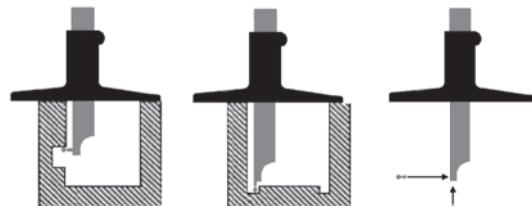

ART NO	mm / inch	mm / inch	mm	mm	mm	mm
220880	300 / 12	0.01 / 0.0005	0.01	0.04	150 / 300 / 450	on request
220881	500 / 20	0.01 / 0.0005	0.01	0.05	150 / 300 / 450	on request
220882	800 / 32	0.01 / 0.0005	0.01	0.06	150 / 300 / 450	on request

Electr. Digital Depth Gauge


acc. to workshop grade

- especially for narrow bore depth
- with round depth measuring bar
- modern design, lightweight model
- made of anodized hard aluminium
- with exchangeable measuring tips (M2.5)
- with exchangeable disc inserts
- incl. 2 measuring bridges


- LCD display with clear reading, digit height 10 mm
- incl. hardened measuring tips with M2.5 thread, exchangeable
- incl. plate insert with ø 10 mm with measuring rods-ø 4 mm
- incl. plate insert with ø 20 mm with measuring rods-ø 6 mm
- all sliding parts slide in plastic bearing double prism guide
- rail and electronics housing made of aluminium, oxide-coated
- On/Off button, mm/inch switchable, zero setting at any position
- incl. 1x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual and hexagon-key
- further probe tips with M2.5 thread see page 168 – 169

Options

- art.-no. 220893: measuring bridge, 550 mm, duraluminium
- art.-no. 220894: measuring bridge, 750 mm, duraluminium
- art.-no. 220895: measuring bridge, 950 mm, duraluminium
- other measuring tips with M2.5 thread, please follow on page 168 – 169

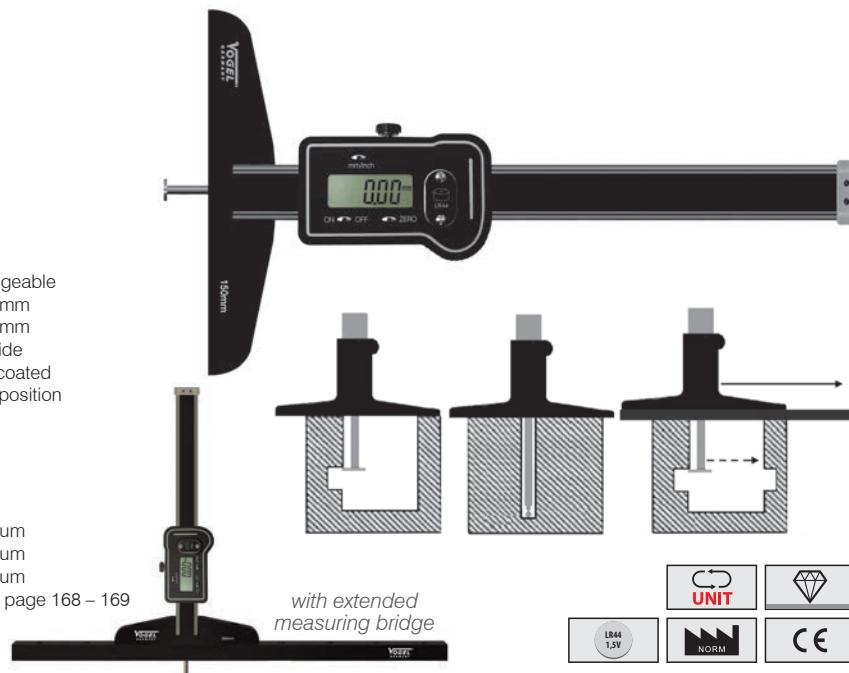

with extended measuring bridge



ART NO	mm / inch	mm / inch	mm	mm	meas.-beam-ø mm	mm	CC
220840	200 / 8	0.01 / 0.0005	0.01	0.03	4	150/350	on request
220841	300 / 12	0.01 / 0.0005	0.01	0.04	4	150/350	on request
220842	500 / 20	0.01 / 0.0005	0.01	0.05	6	150/350	on request
220843	800 / 32	0.01 / 0.0005	0.01	0.06	6	150/350	on request


Depth Calipers

Depth Caliper


DIN 862

• suitable for craftsmen and industry


- stainless steel, hardened, vernier and scale matt chrome finish
- surfaces finely ground, with fixing screw
- mono block vernier, reading 0.05 mm
- straight bar, series 221530, type "C"
- straight and 90°-hook bar, reversible, series 221630, type "A"
- straight and with 2-hook bar, reversible, series 221830, type "B"
- exchangeable tip, reversible, series 221730, type "G"
- fixed tip, (art.-no.: 221718), type "F"

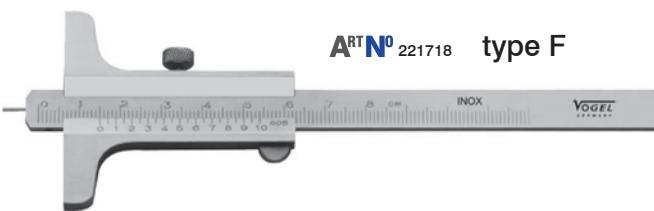


A RTN^o 221532 type C

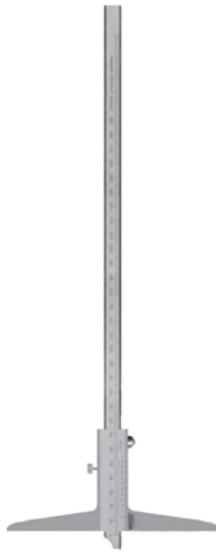

A RTN^o 221632 type A

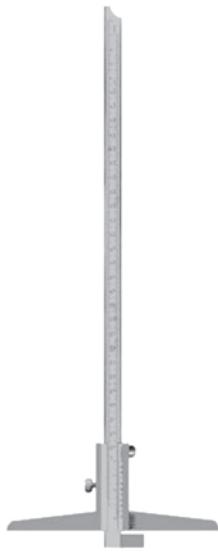

A RTN^o 221732 type G

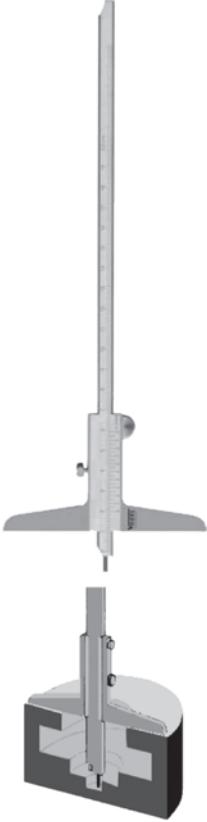

A RTN^o 221832 type B



A RTN^o type C	A RTN^o type A	A RTN^o type B	A RTN^o type G	A RTN^o type F	mm	mm	mm	
—	—	—	—	221718	80	0.05	50	on request
221530	221630	221830	221730	—	150	0.05	100	on request
221531	221631	221831	221731	—	200	0.05	100	on request
221535	221633	—	221733	—	250	0.05	125	on request
221532	221632	221832	221732	—	300	0.05	150	on request
221533	221634	—	—	—	400	0.05	150	on request
221534	221635	—	221735	—	500	0.05	150	on request
221536	221636	—	—	—	500	0.05	250	on request
221537	—	—	—	—	800	0.05	250	on request
221538	—	—	—	—	1000	0.05	250	on request

Measuring Tool Set

- selection of need-based compilations

ART N° SET	pieces	consisting of	article
330002	10	Electr. Digital Caliper stainless steel, 150 x 0.01 mm / 6 x 0.0005"	202011-3
		Marking Gauge stainless steel, 200 x 0,1 mm, hardened carbide scriber	335070
		Digital Angle Sensor „Level Box“ +/- 180 x 0.1°	320010
		Digital Protractor 0 – 360 x 0.05°, 200 x 200 mm	320021
		Workshop Square with back special steel, 100 x 70 mm	312473
		Carbide Marker with clip, exchangeable tips, push technic	334615
		Pocket Measuring Tape 3 meter, self adjusting end-hook, with magnetic dots and lanyard	141003
		Radius Gauge Set 2 pcs.	472105 472106
		Wood Folding Rule white, 2 meter, 10 links	1312010200




ART N° SET	pieces	consisting of	article
202091	3	Digital Caliper • 150 x 0.01 mm • mm / inch • stainless • hardened	202011-3
		Measuring Bridge • 75 mm • stainless • hardened	2002092
		Stainless Steel Rule • 150 x 13 x 0.5 mm • stainless • graduation mm/mm	1010010015



ART N° SET	pieces	consisting of	article
239908	8	Precision Vernier Caliper • 150 x 0.05 mm • mm / inch • stainless • hardened	201020-2
		Micrometer • 0 – 25 mm x 0.01 mm • with carbide surfaces	231351
		Flat Square, DIN 875/2 • 100 x 70 mm	310062
		Knife straight edge, bevelled edge • 100 mm	310323
		Spring Divider • 125 mm	302421
		Carbide Steel Scriber • 150 mm	334608
		Stainless Steel Rule • 200 x 13 x 0.5 mm • stainless • graduation mm/mm	1010010020
		Center Punch • 120 x ø 10 mm	239999



Measuring Tool Sets

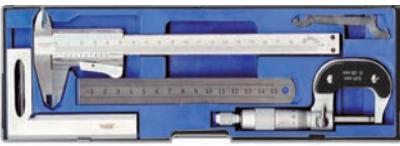ART NO SET	pieces	consisting of	
239911	4	<p>Vernier Caliper • 150 x 0.05 mm • stainless • hardened</p> <p>Micrometer • 0 – 25 mm x 0.01 mm • with carbide surfaces</p> <p>Square, bevelled edge • 100 x 70 mm • chromed</p> <p>Stainless Steel Rule • 150 x 18 x 0.5 mm • stainless • graduation mm/inch</p>	

ART NO SET	pieces	consisting of	article
479901	4	<p>Welding Gauge stainless steel, fan shape, quantity of blades 12, 3 – 12 mm</p> <p>Precision Welding Gauge stainless steel, hardened and fine ground, with vernier reading, scale matt chromed, with fixing screw</p> <p>Precision Welding Gauge stainless steel, hardened and fine ground, reading through a window by a reference line</p> <p>Pipe Welding Gauge / Edge Offset Gauge with opposite movable measuring jaws, for pipe welds up to 35 mm wall thickness, stainless, hardened, reading 1.0 mm</p>	474401 474403 474404 474409



Other combinations available
 on request, please!

VOGEL
GERMANY
Measuring Solutions

Send us a
partnership request



OXOMI.com

OXOMI[®]

Complete catalogue
 assortment searchable
 on OXOMI.com

Repair Service

Benefit from our many years of experience in the repair of measuring tools and the procurement of spare parts and accessories. By having the measuring tools checked by us or our calibration laboratory, you save time, money and unnecessary transport when troubleshooting errors.

Repair, adjustment and testing / calibration from a single source ensure that your measuring tools are in perfect condition.

Overview of services:

- ✓ Visual and functional test
- ✓ Dismantling and cleaning
- ✓ Replacement of the defect parts
- ✓ Assembly with function test
- ✓ Calibration if desired

Any questions?

We are happy to help.





Micrometers



Digital Micrometers	92 – 97
Digital Micrometer Sets	95
Dial Indicator	99
Analog Micrometers	109
Counter Micrometers	100
Analog Micrometer Sets	102
V-Anvil Micrometers	107
Wire Gauge Micrometers	107
Micrometer Accessories	110 – 111
Micrometer Holders	112
Micrometer Heads	113
Depth Micrometers	114 – 115
Inside Micrometers	116 – 118
Digital 2-/3-point internal Micrometers	120 – 125
Analog 3-point inside Micrometers	124 – 127
Accessories for Digital 2-/3-point internal Micrometers	123
Accessories for Analog 3-point internal Micrometers	128
Telescopic Gauge Sets	128
Internal Micrometer Sets	129 – 130
Accessories for internal Precision Measuring Instruments	130 – 131
Saw Teeth Setting Dial Indicators	132
Thickness Gauges	132 – 135
Quick Test Gauges, digital	136 – 142
Quick Test Gauges, analog	137 – 138

Image Directory • Micrometers

Page 92	Page 92	Page 93	Page 93	Page 94
Page 94	Page 95	Page 95	Page 96	Page 96
Page 97	Page 97	Page 99	Page 99	Page 99
Page 100	Page 100	Page 101	Page 101	Page 101
Page 102	Page 102	Page 102	Page 102	Page 103
Page 104	Page 104	Page 105	Page 105	Page 105
Page 106	Page 106	Page 107	Page 107	Page 107

Image Directory • Micrometers

Page 108	Page 108	Page 108	Page 109	Page 109
Page 109	Page 110	Page 110	Page 110	Page 110
Page 111	Page 111	Page 111	Page 111	Page 112
Page 112	Page 113	Page 113	Page 114	Page 114
Page 115	Page 115	Page 116	Page 116	Page 116
Page 116	Page 116	Page 116	Page 116	Page 117
Page 117	Page 118	Page 118	Page 118	Page 120

Image Directory • Micrometers







				
Page 120	Page 120	Page 121	Page 121	Page 122
				
Page 122	Page 123	Page 123	Page 123	Page 123
				
Page 123	Page 123	Page 123	Page 123	Page 124
				
Page 124	Page 125	Page 126	Page 126	Page 126
				
Page 126	Page 126	Page 127	Page 128	Page 128
				
Page 128	Page 129	Page 129	Page 129	Page 129
				
Page 130	Page 130	Page 131	Page 131	Page 131

Image Directory • Micrometers

				
Page 131	Page 132	Page 132	Page 133	Page 133
				
Page 133	Page 134	Page 134	Page 134	Page 134
				
Page 135	Page 135	Page 135	Page 136	Page 136
				
Page 137	Page 138	Page 138	Page 139	Page 139
				
Page 140	Page 140	Page 141	Page 141	Page 141
				
Page 141	Page 141	Page 141	Page 141	Page 141
				
Page 142	Page 142	Page 142		

Precision Digital Micrometers

Sylvac • Professional micrometer S_Mike • IP67



DIN 863

NEW

- auto. wake-up by moving the measuring spindle
- large LCD display with clear reading, digit height 8 mm
- sleeping mode after 20 min. of no use
- position memorized in sleeping mode, absolute system S.I.S.
- with carbide measuring surfaces, lapped, spindle hardened
- water and coolant resistant, protection class IP67 acc. to IEC 60529
- quick movement of the measuring spindle 10 mm / rotation
- spindle Ø 6.5 mm
- with ratchet for constant measuring pressure
- repeatability and reproducibility never reached before
- incl. 1x 3 V battery (type CR2032, art.-no. 90112), with operating manual

Options

- data output via cable, Proximity – USB, art.-no. 2023101, see page 334
- data output via cable, Proximity – RS 232, art.-no. 2023100, see page 334

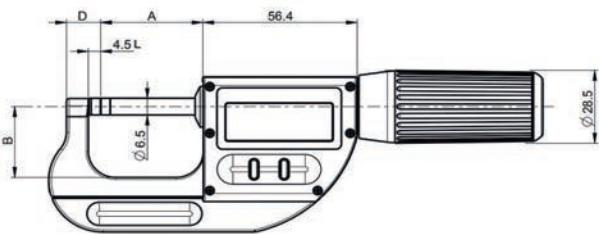

ART No	mm / inch	mm / inch	ø mm	mm	A mm	B mm	D mm	L mm	max. mm	CC
230155	0 – 30 / 0 – 1.2	0.001 / 0.00005	28.5	10	37.3	27.5	12.5	4.5	0.003	inclusive
230156	33 – 66 / 1.2 – 2.6	0.001 / 0.00005	28.5	10	73.3	43.0	13.5	4.5	0.004	inclusive
230157	66 – 102 / 2.6 – 4.0	0.001 / 0.00005	28.5	10	109.3	60.0	14.5	4.5	0.005	inclusive
230158	100 – 136 / 4.0 – 5.4	0.001 / 0.00005	28.5	10	143.3	95.0	19.5	4.5	0.007	inclusive
230159	125 – 161 / 5.0 – 6.4	0.001 / 0.00005	28.5	10	168.3	110.0	19.5	4.5	0.008	inclusive

Sylvac • Professional micrometer S_Mike • IP67

DIN 863




NEW

with integrated Bluetooth® technology

- auto. wake-up by moving the measuring spindle
- large LCD display with clear reading, digit height 8 mm
- sleeping mode after 20 min. of no use
- position memorized in sleeping mode, absolute system S.I.S.
- with carbide measuring surfaces, lapped, spindle hardened
- water and coolant resistant, protection class IP67 acc. to IEC 60529
- quick movement of the measuring spindle 10 mm / rotation
- spindle Ø 6.5 mm
- with ratchet for constant measuring pressure
- repeatability and reproducibility never reached before
- incl. 1x 3 V battery (type CR2032, art.-no. 90112), with operating manual

Options

- data output via Bluetooth®, art.-no. 2023106S, see page 334

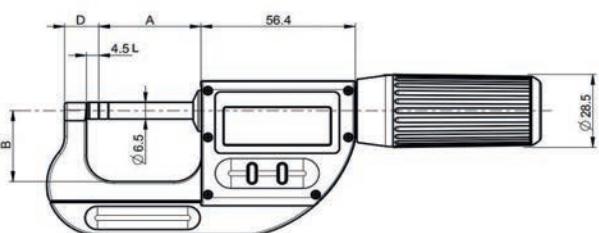

ART No	mm / inch	mm / inch	ø mm	mm	A mm	B mm	D mm	L mm	max. mm	CC
230184	0 – 30 / 0 – 1.2	0.001 / 0.00005	28.5	10	37.3	27.5	12.5	4.5	0.003	inclusive
230185	33 – 66 / 1.2 – 2.6	0.001 / 0.00005	28.5	10	73.3	43.0	13.5	4.5	0.004	inclusive
230186	66 – 102 / 2.6 – 4.0	0.001 / 0.00005	28.5	10	109.3	60.0	14.5	4.5	0.005	inclusive

Sylvac • Professional micrometer S_Mike • IP67

DIN 863

NEW

- auto. wake-up by moving the measuring spindle
- large LCD display with clear reading, digit height 8 mm
- sleeping mode after 20 min. of no use
- position memorized in sleeping mode, absolute system S.I.S
- with carbide measuring surfaces, lapped, spindle hardened
- water and coolant resistant, protection class IP67 acc. to IEC 60529
- quick displacement of the measuring spindle 10 mm / rotation
- with ratchet for constant measuring pressure
- repeatability and reproducibility never reached before
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operating manual

Options

- data output via cable, Proximity – USB, art.-no.: 2023101, see page 334
- data output via cable, Proximity – RS 232, art.-no.: 2023100, see page 334



ART NO	mm / inch	mm / inch	set contents	ø mm	mm	spindle-Ø mm	CC
230188	0 – 102 / 0 – 4.0	0.001 / 0.00005	3	28.5	10	6.5	inclusive

Electr. Digital Micrometer • IP65


DIN 863

- water and coolant resistant acc. to DIN 40050 / IEC 60529
- with data output

- sturdy quality, frame lacquered, with insulation plates
- large LCD display, clear reading, digit height 7 mm
- carbide surfaces, lapped, spindle hardened and ground
- On button, automatic shutdown, zero setting at any position
- mm/inch switchable, ABS/INC measuring system
- locking lever for quick and precise fixing
- with ratchet for constant measuring pressure
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112),
- with operation manual
- from up 25 mm with setting gauge

Options

- data transfer via cable, art.-no.: 3420195, see page 334
- data transfer via WiFi, art.-no.: 2040102, see page 334
- data transfer via Bluetooth®, art.-no.: 209009, see page 334

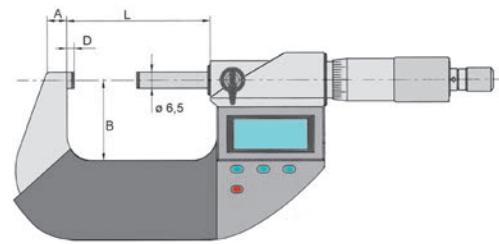

ART NO	mm / inch	mm / inch	ø mm	mm	A mm	B mm	D mm	L mm	max. mm	CC
230130	0 – 25 / 0 – 1	0.001 / 0.00005	18	0.5	9	24	3.5	35	0.003	on request
230131	25 – 50 / 1 – 2	0.001 / 0.00005	18	0.5	9	32	3.5	60	0.003	on request
230132	50 – 75 / 2 – 3	0.001 / 0.00005	18	0.5	12	47	3.5	86	0.004	on request
230133	75 – 100 / 3 – 4	0.001 / 0.00005	18	0.5	14	60	3.5	111	0.004	on request



Precision Digital Micrometers

Electr. Digital Micrometer

DIN 863

- large LCD display with clear reading, digit height 7 mm

- frame lacquered, with insulation plates
- carbide surfaces, lapped, spindle hardened and ground
- autom. shutdown, zero setting at any position
- mm/inch switchable, without data output
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- incl. 1x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual
- from up 25 mm with setting gauge

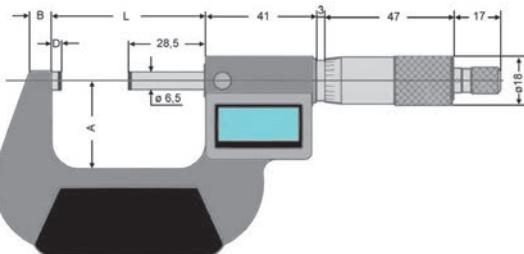


ART NO	mm / inch	mm / inch	ø mm	mm	A mm	B mm	D mm	L mm	max. mm	CC
231088	0 – 25 / 0 – 1	0.001 / 0.00005	18	0.5	24	6	3	32	0.002	on request
231089	25 – 50 / 1 – 2	0.001 / 0.00005	18	0.5	32	8	3	57	0.002	on request
231090	50 – 75 / 2 – 3	0.001 / 0.00005	18	0.5	45	8	3	82	0.003	on request

Electr. Digital Micrometer • IP40

DIN 863

- dust resistant acc. to DIN 40050 / IEC 60529
- Absolute Measurement System (ABS-system)

- frame lacquered, with insulation plates, sturdy quality
- large LCD display, clear reading, digit height 8 mm
- with carbide surfaces, lapped, spindle hardened and ground
- On/Off button, zero setting at any position
- mm/inch switchable, ABS/INC measuring system
- locking lever for quick and precise fixing
- with friction ratchet for constant measuring pressure
- friction ratchet with rubber studs for better handling
- incl. 1x 3 V battery (type CR2032, art.-no. 90112), with operation manual
- from up 25 mm with setting gauge

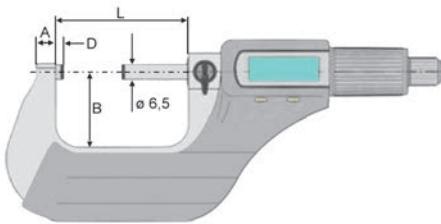


ART NO	mm / inch	mm / inch	ø mm	mm	A mm	B mm	D mm	L mm	max. mm	CC
231061	0 – 25 / 0 – 1	0.001 / 0.00005	22	0.5	6	25	3.5	32	0.003	on request
231062	25 – 50 / 1 – 2	0.001 / 0.00005	22	0.5	6	32	3.5	57	0.003	on request
231063	50 – 75 / 2 – 3	0.001 / 0.00005	22	0.5	7	44	3.5	82	0.004	on request
231064	75 – 100 / 3 – 4	0.001 / 0.00005	22	0.5	8	59	3.5	108	0.005	on request

Precision Digital Micrometers and Digital Micrometer Set

Electr. Digital Micrometer • IP40

DIN 863

- dust resistant acc. to DIN 40050 / IEC 60529 for chordal measurement of gear teeth, keys, ribs, fins, etc.
- Absolute Measurement System (ABS-system)
- LCD display, with clear reading, digit height 7 mm, mm/inch switchable
- frame lacquered, with insulated plates
- non-rotating spindle with disc measuring faces
- ABS/INC measurement system, zero setting at any position, On/Off button
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- incl. 1x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual
- from up 25 mm with setting gauge

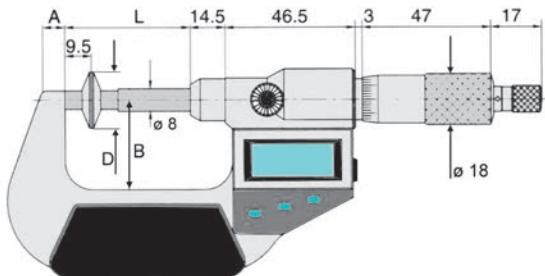

ART NO	mm / inch	mm / inch	A mm	B mm	D mm	L mm	max. mm	CC
231171	0 – 25 / 0 – 1	0.001 / 0.00005	0.7	32.0	20	43.0	0.004	on request
231172	25 – 50 / 1 – 2	0.001 / 0.00005	0.7	44.5	20	68.0	0.004	on request
231173	50 – 75 / 2 – 3	0.001 / 0.00005	0.7	57.0	20	93.0	0.005	on request
231174	75 – 100 / 3 – 4	0.001 / 0.00005	0.7	70.0	20	118.5	0.005	on request

Electr. Digital Micrometer Set • IP65


DIN 863

- water and coolant resistant acc. to DIN 40050 / IEC 60529
- with data output

- sturdy quality, frame lacquered, with insulation plates
- large LCD display, clear reading, digit height 7 mm
- carbide surfaces, lapped, spindle hardened and ground
- On button, automatic shutdown, zero setting at any position
- mm/inch switchable, ABS/INC measuring system
- locking lever for quick and precise fixing
- with ratchet for constant measuring pressure
- incl. 3 V batteries (type CR2032, art.-no.: 90112), with operation manual
- from up 25 mm with setting gauge

Options

- data transfer via cable, art.-no.: 3420195, see page 334
- data transfer via WiFi, art.-no.: 2040102, see page 334
- data transfer via Bluetooth®, art.-no.: 209009, see page 334



ART NO	mm / inch	mm / inch	set contents	ø mm	mm	max. mm	CC
232171	0 – 100 / 0 – 4	0.001 / 0.00005	4	18	0.5	0.003 / 0.004	on request


Precision Digital External Micrometers, Special Design

Electr. Digital Micrometer

DIN 863

- with 30° and 15° measuring tips
- Absolute Measurement System (ABS-system)

- LCD display, with clear reading, digit height 7 mm, mm/inch switchable
- frame lacquered, with insulation plates, carbide surfaces, lapped
- ABS/INC measurement system
- zero setting at any position, On/Off button
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- incl. 1x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual
- form up 25 mm setting with gauge

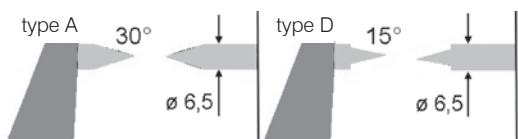

ART NO type A	ART NO type D	mm / inch	meas. tips radius mm	max. mm	Ø mm	CC
232971	232961	0 – 25 / 0 – 1	0.001 / 0.00005	0.3	0.002	18

Follow us on Facebook.

Never miss any news about our products, promotions and offers.



Any questions?
We are pleased to advise.

facebook.com/VogelGermany



Precision Digital External Micrometers, Special Design

Electr. Digital Micrometer • IP40

DIN 863

- dust resistant acc. to DIN 40050 / IEC 60529
- to measure small grooves, etc.
- **Absolute Measurement System (ABS-system)**

- LCD display, with clear reading, digit height 7 mm, mm/inch switchable
- drum with metric scale
- frame lacquered, with insulated plates
- non-rotating spindle with blade measuring faces
- ABS/INC measurement system
- zero setting at any position, On/Off button
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- incl. 1x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual
- from up 25 mm with setting gauge

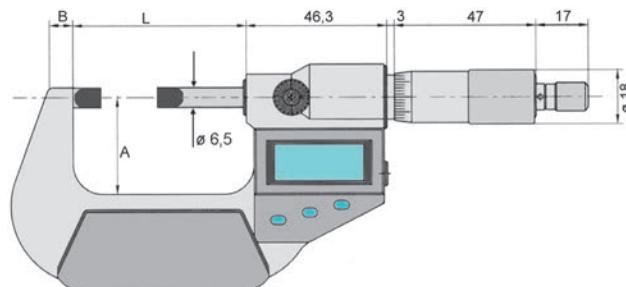


ART NO	mm / inch	mm / inch	A mm	B mm	L mm	S mm	T mm	max. mm	CC
232381	0 – 25 / 0 – 1	0.001 / 0.00005	26.5	6	57.0	0.75	6.5	0.002	on request
232382	25 – 50 / 1 – 2	0.001 / 0.00005	32.0	8	82.0	0.75	6.5	0.002	on request
232383	50 – 75 / 2 – 3	0.001 / 0.00005	44.5	8	107.0	0.75	6.5	0.003	on request
232384	75 – 100 / 3 – 4	0.001 / 0.00005	57.0	8	132.6	0.75	6.5	0.003	on request

Electr. Digital Micrometer

- for measuring pipe wall thicknesses etc.
- **Absolute Measurement System (ABS-system)**

- LCD display, with clear reading, digit height 7 mm, mm/inch switchable
- frame lacquered, with insulated plates, carbide surface, hardened anvil
- ABS/INC measurement system
- zero setting at any position, On/Off button
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- incl. 1x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual

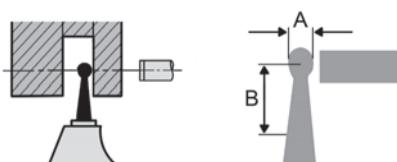

ART NO	mm / inch	mm / inch	Ø mm	A Ø mm	B mm	max. mm	CC
232813	0 – 25 / 0 – 1	0.001 / 0.00005	18	4.7	25	0.003	on request



WORLDWIDE CONTACTS
WORLDWIDE CONTACTS
WORLDWIDE CONTACTS

WORLDWIDE CONTACTS
WORLDWIDE CONTACTS
WORLDWIDE CONTACTS



At home around the world. We are with you wherever you are...

Since 1949 Vogel Germany is at home around the world.

We are there for you worldwide via sales agents,
distributors, dealers, sales representatives, trade representatives etc.


Any questions?
We are pleased to advise.

Indicator Snap Micrometers and Precision Micrometers

Indicator Snap Micrometer

- reading in μm
- for precise measurements in the series production

- drum and sleeve matt chrome
- frame hammer blow grey, with insulation plates
- carbide surfaces, lapped, spindle hardened and ground
- locking lever for quick and precise fixing
- art. no. 231390 with anvil-lifting, adjustable depth stop
- accuracy micrometer $\pm 0.003 \text{ mm}$
- accuracy indicator $\pm 0.001 \text{ mm}$

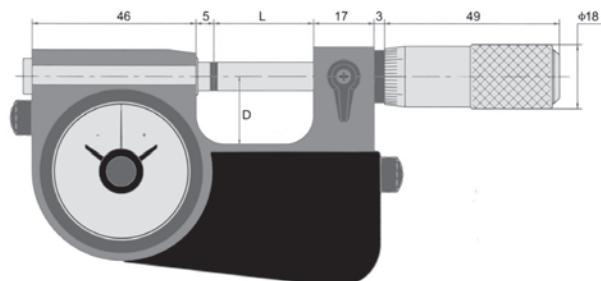


ART No	mm	drum mm	dial mm	indicator mm	ϕ mm	L mm	D mm	CC
231390	0 - 25	0.002	0.001	± 0.001	18	28.5	19.0	on request
231395	0 - 25	0.002	0.001	± 0.001	18	28.5	19.0	on request

Precision External Micrometer

- for professional industry purposes
- accuracy better than DIN 863

- sturdy quality, in high precision version
- drum and sleeve matt chrome finish
- hammer blow grey lacquered frame, with insulation plates
- carbide surfaces, lapped, spindle hardened and ground
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- from up 25 mm with setting gauge

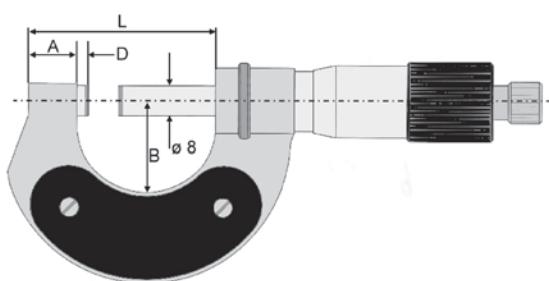


ART No	mm	mm	ϕ mm	mm	A mm	B mm	D mm	L mm	max. mm	CC
230586	0 - 25	0.01	21	0.5	13	24	3	37	0.002	on request
230587	25 - 50	0.01	21	0.5	13	34	3	62	0.002	on request
230588	50 - 75	0.01	21	0.5	15	46	3	87	0.003	on request
230589	75 - 100	0.01	21	0.5	15	60	3	112	0.003	on request

Precision Micrometers

External Micrometer

DIN 863

- sturdy quality, in top precision version
- drum and sleeve matt chromed finish
- hammer blow grey lacquered frame, with insulation plates
- carbide surfaces, lapped, spindle hardened and ground
- locking lever for quick and precise fixing
- with ratchet for constant measuring pressure
- from up 25 mm with setting gauge

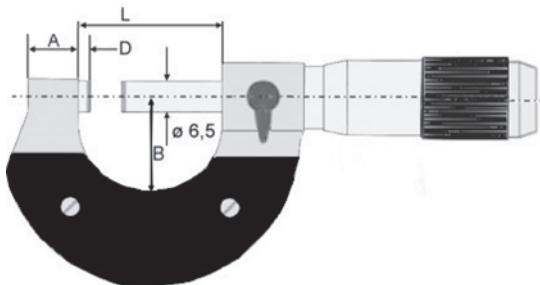


ART N°	mm	mm	Ø mm	mm	A mm	B mm	D mm	L mm	max. mm	CC
231321	0 - 25	0.01	20.5	0.5	7	26	3	32	0.004	on request
231322	25 - 50	0.01	20.5	0.5	8	31	3	57	0.004	on request
231323	50 - 75	0.01	20.5	0.5	9	45.5	3	83	0.005	on request
231324	75 - 100	0.01	20.5	0.5	9	56.5	3	109	0.005	on request

Counter External Micrometer

easy handling and precise reading

- mechanical digital counter, frame lacquered, with insulation plates
- carbide surfaces, lapped, spindle hardened and ground
- with ratchet for constant measuring pressure
- locking wheel for quick and precise fixing
- from up 25 mm with setting gauge


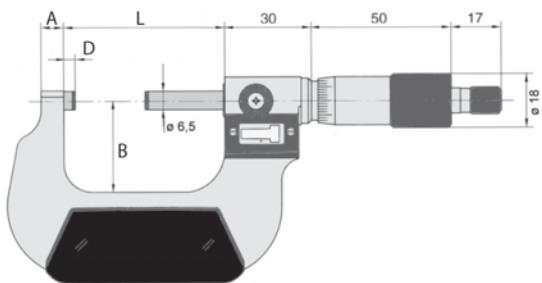


ART N°	mm	mm	Ø mm	A mm	B mm	D mm	L mm	max. mm	CC
231451	0 - 25	0.01	18	6	26	3.5	32	0.004	on request
231452	25 - 50	0.01	18	8	32	3.5	57	0.004	on request

External Micrometer

DIN 863

- sturdy quality, in precision version
- drum and sleeve matt chrome finish
- hammer blow grey lacquered frame, with insulation plates
- carbide surfaces, lapped, spindle hardened and ground
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- from up 25 mm with setting gauge




ART No	mm	mm	Ø mm	mm	A mm	B mm	D mm	L mm	max. mm	CC
231330	0 - 25	0.01	23	0.5	9	32	3	32.5	0.004	on request
231331	25 - 50	0.01	23	0.5	15	33	3	57.5	0.004	on request
231332	50 - 75	0.01	23	0.5	15	40	3	82.5	0.005	on request
231333	75 - 100	0.01	23	0.5	15	55	3	107.5	0.005	on request
231334	100 - 125	0.01	23	0.5	32	80	3	168.5	0.006	on request
231335	125 - 150	0.01	23	0.5	32	80	7.5	168.5	0.006	on request

External Micrometers

DIN 863

- lightweight design, metric graduation
- e.g. for use in the workshop

- drum and sleeve matt chrome finish
- frame hammer blow blue lacquered
- carbide surfaces, lapped, spindle hardened and ground
- locking lever for quick and precise fixing
- with ratchet for constant measuring pressure
- from up 25 mm with setting gauge




ART No	mm	mm	Ø mm	mm	A mm	B mm	D mm	L mm	max. mm	CC
231301	0 - 25	0.01	18	0.5	9.0	28	3.0	32	0.004	on request
231302	25 - 50	0.01	18	0.5	14.0	38	3.0	57	0.004	on request
231303	50 - 75	0.01	18	0.5	15.0	49	3.0	82	0.005	on request
231304	75 - 100	0.01	18	0.5	15.0	60	3.0	107	0.005	on request
231305	100 - 125	0.01	18	0.5	16.5	73	3.0	133	0.006	on request
231306	125 - 150	0.01	18	0.5	16.5	85	3.0	158	0.006	on request

External Micrometer NEW

DIN 863

- drum and sleeve black anodized surface
- black powder coated frame, with insulation plates
- carbide surfaces, lapped, spindle hardened and ground
- locking lever for quick and precise fixing
- with ratchet for constant measuring pressure

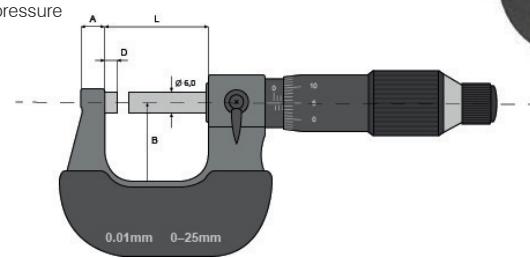

ART No	mm	mm	Ø mm	mm	A mm	B mm	D mm	L mm	max. mm	CC
231309	0 - 25	0.01	19.5	0.5	7	24	3	31	0.004	on request


Precision Micrometer and Sets

External Micrometer

DIN 863

• for standard expectations

- drum and sleeve matt chrome finish
- frame hammer blow grey lacquered, with insulated handle
- carbide surfaces, lapped, spindle hardened and ground
- locking lever for quick and precise fixing
- with ratchet for constant measuring pressure
- from up 25 mm with setting gauge

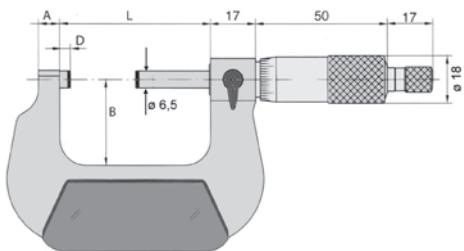

ART N° 231351 – 231354



ART N° 231355 – 231358



ART N°	mm	mm	Ø mm	mm	A mm	B mm	D mm	L mm	mm	CC
231351	0 – 25	0.01	18	0.5	6	24	3.0	32	0.004	on request
231352	25 – 50	0.01	18	0.5	8	32	3.0	57	0.004	on request
231353	50 – 75	0.01	18	0.5	8	45	3.0	82	0.005	on request
231354	75 – 100	0.01	18	0.5	8	57	3.0	107	0.005	on request
231355	100 – 125	0.01	18	0.5	8	70	3.0	133	0.006	on request
231356	125 – 150	0.01	18	0.5	8	82	3.0	158	0.006	on request
231357	150 – 175	0.01	18	0.5	8	95	5.5	183	0.007	on request
231358	175 – 200	0.01	18	0.5	8	107	5.5	209	0.007	on request

External Micrometer Set


DIN 863

• for standard expectations

- drum and sleeve matt chrome finish
- frame hammer blow grey lacquered, with insulation plates
- carbide surfaces, lapped, spindle hardened and ground
- locking lever for quick and precise fixing
- with ratchet for constant measuring pressure
- from up 25 mm with setting gauge



ART N° 232006

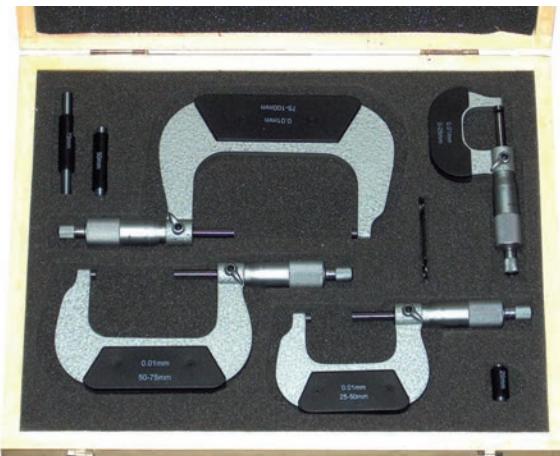

ART N° 232003 – 232004



ART N°	mm	mm	set content	Ø mm	mm	spindle-Ø mm	CC
232003	0 – 75	0.01	3	18	0.5	6.5	on request
232004	0 – 100	0.01	4	18	0.5	6.5	on request
232006	0 – 150	0.01	6	18	0.5	6.5	on request
232107	150 – 300	0.01	6	18	0.5	6.5	on request
232108	0 – 300	0.01	12	18	0.5	6.5	on request
232109	100 – 200	0.01	4	18	0.5	6.5	on request

External Micrometer


DIN 863

- with 50 mm spindle revolution
- 100 step graduation

- drum and sleeve matt chrome finish
- lightweight metal frame, hammer blow grey lacquered
- carbide surfaces, lapped, spindle hardened and fine ground
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- without setting gauges, for setting gauges see page 111



Version with
insulated handle on request



ART No	mm	mm	Ø mm	mm	L mm	B mm	A mm	mm	CC
230290	300 – 350	0.01	24	1.0	370	190	42	0.006	on request
230291	350 – 400	0.01	24	1.0	430	220	42	0.006	on request
230292	400 – 450	0.01	24	1.0	475	250	42	0.007	on request
230293	450 – 500	0.01	24	1.0	530	273	42	0.007	on request
230294	500 – 550	0.01	24	1.0	570	291	42	0.008	on request
230295	550 – 600	0.01	24	1.0	630	323	42	0.008	on request

External Micrometer


DIN 863

- for large measuring ranges
- with exchangeable extension
- with lightweight metal frame

- drum and sleeve matt chrome finish, spindle revolution 50 mm
- lightweight metal frame, hammer blow grey lacquered
- carbide surfaces, lapped, spindle hardened and fine ground
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- without setting gauges, for setting gauges see on page 111



Version with
insulated handle on request



ART No	mm	mm	Ø mm	mm	L mm	B mm	A mm	mm	CC
230170	200 – 300	0.01	24	1.0	325	165	64	0.006	on request
230171	300 – 400	0.01	24	1.0	430	220	74	0.007	on request
230172	400 – 500	0.01	24	1.0	530	273	87	0.008	on request
230173	500 – 600	0.01	24	1.0	630	323	102	0.009	on request
230174	600 – 700	0.01	24	1.0	730	378	107	0.009	on request
230175	700 – 800	0.01	24	1.0	830	423	113	0.009	on request
230176	800 – 900	0.01	24	1.0	930	473	118	0.010	on request
230177	900 – 1000	0.01	24	1.0	1030	520	129	0.010	on request
230178	1000 – 1100	0.01	24	1.0	1135	585	142	0.011	on request
230179	1100 – 1200	0.01	24	1.0	1230	635	156	0.011	on request
230180	1200 – 1300	0.01	24	1.0	1335	685	168	0.012	on request
230181	1300 – 1400	0.01	24	1.0	1430	735	171	0.012	on request
230182	1400 – 1500	0.01	24	1.0	1530	780	180	0.013	on request

Precision Micrometers

External Micrometer

DIN 863

- large measuring range
- with adjustable anvil
- with lightmetal frame
- with 50 mm spindle revolution
- drum and sleeve matt chrome finish
- frame hammer blow lacquered, carbide surfaces, lapped, spindle hardened and fine ground
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- without setting gauges, for setting gauges see on page 102



Version with
insulated handle on request




ART No	mm	mm	Ø mm	mm	spindle-Ø mm	max. mm	CC
234205	0 – 300	0.1 / 0.01	24	1.0	10.0	0.006	on request
234206	300 – 600	0.1 / 0.01	24	1.0	10.0	0.009	on request
234207	600 – 900	0.1 / 0.01	24	1.0	10.0	0.012	on request
234208	900 – 1200	0.1 / 0.01	24	1.0	10.0	0.015	on request
234209	1200 – 1500	0.1 / 0.01	24	1.0	10.0	0.018	on request
234210	1500 – 1800	0.1 / 0.01	24	1.0	10.0	0.023	on request
234211	1700 – 2000	0.1 / 0.01	24	1.0	10.0	0.025	on request

External Micrometer

- for measuring plates and panels
- 100 step graduation
- with deep frame

- drum and sleeve matt chrome finish
- frame hammer blow grey lacquered
- carbide surfaces, lapped, spindle hardened and fine ground
- without insulation plates
- with ratchet for constant measuring pressure



ART No	mm	mm	Ø mm	mm	spindle-Ø mm	max. mm	CC
232611	0 – 25 x 50	0.01	24	1.0	6.5	0.002	on request
232612	0 – 25 x 100	0.01	24	1.0	8.0	0.003	on request
232613	0 – 25 x 150	0.01	24	1.0	6.5	0.005	on request

Precision Special Micrometers

Micrometer


DIN 863

• with special measuring faces

- drum and sleeve matt chrome finish
- frame hammer blow grey lacquered
- with insulation plates
- carbide surfaces, finely ground
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure



ART No 232910

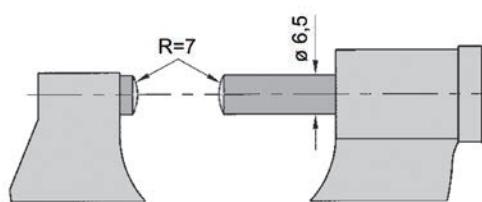

ART No 232921



ART No 60° R = 0.4 mm	ART No R = 7 mm	→ mm	mm	mm	mm	spindle-Ø mm	max. mm	CC
232910	232921	0 - 25	0.01	20	0.5	6.5	0.003	on request
232911	232922	25 - 50	0.01	20	0.5	6.5	0.003	on request

Micrometer

DIN 863

• with 30° and 60° pointed measuring faces

- drum and sleeve matt chrome finish
- frame hammer blow grey lacquered
- with insulation plates
- carbide surfaces, finely ground
- anvil length 15 mm
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure



Other measuring forms for
art.-no. 230065 – 230068
are available on request,
e.g. 15° / 20° / 45°

Suitable setting gauges
are on page 111



ART No	→ mm	mm	mm	mm	measuring surfaces	spindle-Ø mm	max. mm	CC
230065	0 - 25	0.01	20	0.5	30° / R = 0.4	6.5	0.003	on request
230066	25 - 50	0.01	20	0.5	30° / R = 0.4	6.5	0.003	on request
230067	50 - 75	0.01	20	0.5	30° / R = 0.4	6.5	0.004	on request
230068	75 - 100	0.01	20	0.5	30° / R = 0.4	6.5	0.004	on request
230075	0 - 25	0.01	20	0.5	60° / R = 0.4	6.5	0.003	on request
230076	25 - 50	0.01	20	0.5	60° / R = 0.4	6.5	0.003	on request
230077	50 - 75	0.01	20	0.5	60° / R = 0.4	6.5	0.004	on request
230078	75 - 100	0.01	20	0.5	60° / R = 0.4	6.5	0.004	on request



Precision Special Micrometers

Precision Blade Micrometer

DIN 863

• to measure small punctures, grooves, etc.

- drum and sleeve matt chrome finish
- frame hammer blow lacquered
- with insulation plates
- flat measuring ends, flat surfaces
- anvil length 18 mm
- hardened measuring surfaces, finely ground
- non-rotating spindle
- with ratchet for constant measuring pressure

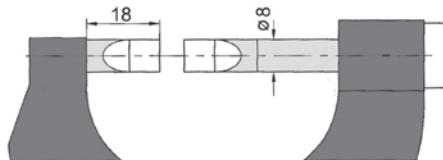


ART NO	mm	mm	Ø mm	mm	measuring surfaces S x T mm	spindle-Ø mm	max. mm	CC
230380	0 - 25	0.01	20	0.5	0.40 x 4.0	8.0	0.003	on request
230381	25 - 50	0.01	20	0.5	0.40 x 4.0	8.0	0.003	on request
230382	50 - 75	0.01	20	0.5	0.75 x 7.0	8.0	0.004	on request
230383	75 - 100	0.01	20	0.5	0.75 x 7.0	8.0	0.004	on request
230384	100 - 125	0.01	20	0.5	0.75 x 7.0	8.0	0.005	on request
230385	125 - 150	0.01	20	0.5	0.75 x 7.0	8.0	0.005	on request

Precision Disc-Type Micrometer

DIN 863

• for chordal measurement of gear teeth, keys, ribs, fins, etc.

- drum and sleeve matt chrome finish
- spindle pitch 1 mm
- frame hammer blow grey lacquered
- hardened measuring plates, parallel lapped
- with insulation plates
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure




ART NO	mm	mm	Ø mm	mm	measuring disc-Ø mm	spindle-Ø mm	max. mm	CC
230001	0 - 25	0.01	20	0.5	25	8	0.004	on request
230002	25 - 50	0.01	20	0.5	25	8	0.004	on request
230003	50 - 75	0.01	20	0.5	25	8	0.005	on request
230004	75 - 100	0.01	20	0.5	25	8	0.005	on request
230005	100 - 125	0.01	20	0.5	25	8	0.006	on request
230006	125 - 150	0.01	20	0.5	25	8	0.006	on request
230007	150 - 175	0.01	20	0.5	25	8	0.006	on request
230008	175 - 200	0.01	20	0.5	25	8	0.006	on request
230009	200 - 225	0.01	20	0.5	25	8	0.007	on request
230010	225 - 250	0.01	20	0.5	25	8	0.007	on request
230011	250 - 275	0.01	20	0.5	25	8	0.007	on request
230012	275 - 300	0.01	20	0.5	25	8	0.007	on request

Disc-Type Micrometer

DIN 863

- for chordal measurement of gear teeth, keys, ribs, fins, etc.

- drum and sleeve matt chrome finish
- non-rotating spindle
- frame lacquered, with insulation plates
- carbide measuring plates, parallel lapped
- with ratchet for constant measuring pressure
- from up 25 mm with setting gauge

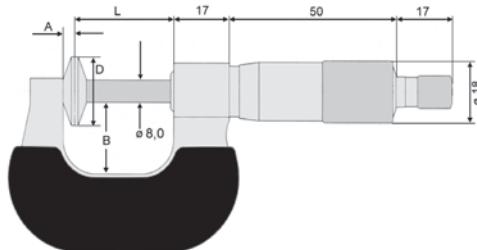

ART No	mm	mm	Ø mm	mm	A mm	B mm	D mm	L mm	max. mm	CC
231121	0 - 25	0.01	18	0.5	3.3	20	20	34	0.004	on request
231122	25 - 50	0.01	18	0.5	3.3	28	20	59	0.004	on request
231123	50 - 75	0.01	18	0.5	3.3	41	20	85	0.005	on request
231124	75 - 100	0.01	18	0.5	3.3	53	20	110	0.005	on request

V-Anvil Micrometer

- for measuring odd fluted taps, milling cutters, reamers, etc.

- drum and sleeve matt chrome finish
- non-rotating spindle
- frame lacquered, with insulation plates
- carbide measuring plate, flat lapped
- with ratchet for constant measuring pressure
- locking wheel for quick and precise fixing
- with setting gauge
- for 3 anvils 60°



ART No	mm	mm	Ø mm	mm	mm	max. mm	CC
230080	1 - 15	0.01	18	0.5		0.004	on request
230081	5 - 20	0.01	18	0.5		0.004	on request
230082	20 - 35	0.01	18	0.5		0.005	on request
230083	35 - 50	0.01	18	0.5		0.005	on request
230084	50 - 65	0.01	18	0.5		0.006	on request
230085	65 - 80	0.01	18	0.5		0.006	on request

Wire Thickness Micrometer

DIN 863

- to measure wire, rods etc.

- drum and sleeve matt chrome finish
- carbide surfaces, finely ground
- with ratchet for constant measuring pressure



ART No	mm	mm	Ø mm	mm	spindle-Ø mm	max. mm	CC
232902	0 - 10	0.01	19	0.5	6.5	0.004	on request


Precision Special Micrometers

Micrometer for external threads

DIN 863

- for external thread measurements

- drum and sleeve matt chrome finish
- frame hammer blow grey lacquered, with insulation plates
- hardened thread flanks measuring inserts, exchangeable
- delivery without inserts and without setting gauges
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure

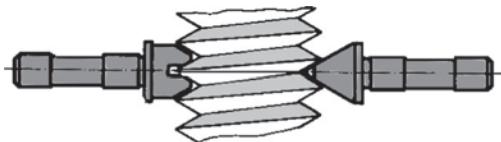

Suitable setting gauges
can be found on page 110



ART No size of inserts $\varnothing 4 \times 15.5$ mm	ART No size of inserts $\varnothing 3.5 \times 13.5$ mm	— ————— mm	mm	\varnothing mm	mm	spindle setting mm	— ————— mm	
230420	230450	0 - 25	0.01	20	0.5	25 mm	0.003	on request
230421	230451	25 - 50	0.01	20	0.5	25 mm	0.003	on request
230422	230452	50 - 75	0.01	20	0.5	25 mm	0.004	on request
230423	230453	75 - 100	0.01	20	0.5	25 mm	0.004	on request
230424	230454	100 - 125	0.01	20	0.5	25 mm	0.004	on request
230425	230455	125 - 150	0.01	20	0.5	25 mm	0.004	on request
230426	230456	150 - 200	0.01	20	0.5	50 mm	0.005	on request
230427	230457	200 - 250	0.01	20	0.5	50 mm	0.005	on request
230428	230458	250 - 300	0.01	20	0.5	50 mm	0.005	on request

Thread Flanks Measuring Inserts, exchangeable

DIN 863

- suitable for series 230420 – 230428 and 230450 – 230458

- hardened and finely ground
- each insert marked with thread pitch
- delivery in pair (groove and cone)
- calibration certificate available on request



ART No metr. ISO 60° $\varnothing 4 \times 15.5$ mm	ART No metr. ISO 60° $\varnothing 3.5 \times 13.5$ mm	— ————— mm
2304206-001	2304506-001	0.35 - 0.50
2304206-002	2304506-002	0.60 - 0.80
2304206-003	2304506-003	0.90 - 1.25
2304206-004	2304506-004	1.50 - 2.00
2304206-005	2304506-005	2.50 - 3.50
2304206-006	2304506-006	4.00 - 6.00



ART No ISO trapez 30° $\varnothing 4 \times 15.5$ mm	ART No ISO trapez 30° $\varnothing 3.5 \times 13.5$ mm	— ————— mm
2304207-001	2304507-001	1.5
2304207-002	2304507-002	2
2304207-003	2304507-003	3
2304207-004	2304507-004	4
2304207-005	2304507-005	5 - 6
2304207-006	2304507-006	7 - 8
2304207-007	2304507-007	9 - 10
2304207-008	2304507-008	12 - 14

ART No whitworth 55° $\varnothing 4 \times 15.5$ mm	ART No whitworth 55° $\varnothing 3.5 \times 13.5$ mm	— ————— thread/inch
2304205-501	2304505-501	60 - 48
2304205-502	2304505-502	40 - 32
2304205-503	2304505-503	28 - 22
2304205-504	2304505-504	20 - 16
2304205-505	2304505-505	14 - 11
2304205-506	2304505-506	10 - 7
2304205-507	2304505-507	6 - 4
—	—	—


Precision Special Micrometers

Precision Gear Tooth Outside Micrometer

DIN 863

• to measure over-pin diameter of external gears

- drum and sleeve matt chrome finish
- interchangeable ball anvil-spindle tips for various gear modules
- borehole for measuring ball holder- \varnothing 3.0 mm, hardened measuring balls
- frame hammer blow grey lacquered, with insulation plates
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- delivery **without** measuring ball holder, see on page 110

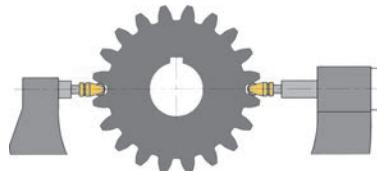

ART No	mm	mm	\varnothing mm	mm	measuring end- \varnothing $\varnothing \times$ length mm	mm	CC
230901	0 - 25	0.01	20	0.5	3 x 8	0.002	on request
230902	25 - 50	0.01	20	0.5	3 x 8	0.002	on request
230903	50 - 75	0.01	20	0.5	3 x 8	0.003	on request
230904	75 - 100	0.01	20	0.5	3 x 8	0.003	on request
230905	100 - 125	0.01	20	0.5	3 x 8	0.004	on request
230906	125 - 150	0.01	20	0.5	3 x 8	0.004	on request
230907	150 - 175	0.01	20	0.5	3 x 8	0.004	on request
230908	175 - 200	0.01	20	0.5	3 x 8	0.004	on request
230909	200 - 225	0.01	20	0.5	3 x 8	0.005	on request
230910	225 - 250	0.01	20	0.5	3 x 8	0.005	on request

Precision Gear Tooth Inside Micrometer

DIN 863

• to measure the pitch circle of internal gears

- drum and sleeve matt chrome finish
- borehole for measuring ball holder- \varnothing 3.0 mm, hardened measuring balls
- with insulation handles
- with ratchet for constant measuring pressure
- delivery **without** measuring ball holder, see on page 110



Suitable setting gauges
are on page 110



ART No	version or extensions	mm	mm	\varnothing mm	mm	measuring end- \varnothing $\varnothing \times$ length mm	mm	CC
230919	jaws	25 - 50	0.01	21	0.5	3 x 6	0.003	on request
230920	jaws	50 - 75	0.01	21	0.5	3 x 8	0.003	on request
230921	measuring body	75 - 100	0.01	17	0.5	3 x 8	0.003	on request
230922	25/50	75 - 175	0.01	17	0.5	3 x 8	0.006	on request
230923	25/50/100	75 - 275	0.01	17	0.5	3 x 8	0.008	on request
230924	25/50/100/200	75 - 475	0.01	17	0.5	3 x 8	0.010	on request
230925	25/50/100/200/400	75 - 875	0.01	17	0.5	3 x 8	0.012	on request
230926	25/50/100/200/400/600	75 - 1475	0.01	17	0.5	3 x 8	0.015	on request

Accessories for Precision Micrometers

Measuring Ball Holder

- for series 230901 – 230910 and 230921 – 230926
- for external and internal gearing
- with hardened steel balls
- carbide balls available on request



ART No	ball-Ø mm	module	max. mm
230928	1.5	0.9 / 1	0.001
230928-1	1.75	1.125	0.001
230929	2.0	1.25	0.001
230929-1	2.25	1.5	0.001
230930	2.5	1.75	0.001
230931	3.0	2	0.001
230932	3.5	2.25	0.001
230933	4.0	2.5 / 2.75	0.001
230934	4.5	3	0.001
230935	5.0	3.25 / 3.5	0.001
230936	5.5	3.75	0.001
230937	6.0	4	0.001

ART No	ball-Ø mm	module	max. mm
230938	6.5	4.25 / 4.5	0.001
230939	7.0	4.5	0.001
230940	7.5	5	0.001
230941	8.0	5.5	0.001
230942	9.0	6	0.001
230943	10.0	6.5	0.0015
230944	10.5	7	0.0015
230945	11.0	7.5	0.0015
230946	12.0	8	0.0015
230947	13.0	8.5 / 9	0.0015
230948	14.0	9.5	0.0015
230949	15.0	10	0.0015

Measuring Pressure Test Gauge


- for micrometers

- pressure range 5 – 12 N
- for spindle-Ø up to 8 mm

ART No 230998



ART No 230999

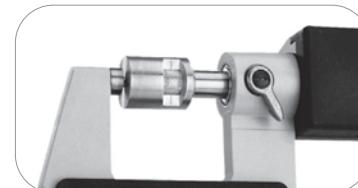

ART No

230998	25 / 50 / 75 / 100
230999	25

mm

Optical Parallels

- designed to inspect parallelism and flatness of measuring faces of micrometers
- each glass is marked with an identification-number (glued)
- ground and polished on both sides, polished and faceted border



example



ART No	nominal size mm	glass-Ø mm	accuracy of flatness µm	parallelism µm	CC DAKks
350305-1	15	55	≤ 0.10	—	on request
350309	12.00 / 12.12 / 12.25 / 12.37	30	≤ 0.15	≤ 0.30	on request
350309-1	25.00 / 25.12 / 25.25 / 25.37	30	≤ 0.15	≤ 0.40	on request

Setting Gauges for Micrometers

DIN 863

- hardened surfaces, ground and lapped
- surfaces \varnothing 6,5 mm, from size 300 mm with \varnothing 10 mm
- with insulation handle

Other sizes available
on request!



175 mm 20°C



DIN

ART No	mm	mm	CC	ART No	mm	mm	CC
2309302	25	0.00125	on request	2309327	650	0.004	on request
2309303	50	0.00125	on request	2309328	675	0.004	on request
2309304	75	0.00150	on request	2309329	700	0.004	on request
2309305	100	0.00200	on request	2309330	725	0.004	on request
2309306	125	0.00250	on request	2309331	750	0.004	on request
2309307	150	0.00250	on request	2309332	775	0.004	on request
2309308	175	0.00250	on request	2309333	800	0.004	on request
2309309	200	0.00300	on request	2309334	825	0.004	on request
2309310	225	0.00300	on request	2309335	850	0.004	on request
2309311	250	0.00300	on request	2309336	875	0.004	on request
2309312	275	0.00300	on request	2309337	900	0.005	on request
2309313	300	0.00300	on request	2309338	925	0.005	on request
2309314	325	0.00350	on request	2309339	950	0.005	on request
2309315	350	0.00350	on request	2309340	975	0.005	on request
2309316	375	0.00350	on request	2309341	1000	0.005	on request
2309317	400	0.00350	on request	2309342	1050	0.005	on request
2309318	425	0.00350	on request	2309343	1150	0.006	on request
2309319	450	0.00350	on request	2309344	1250	0.007	on request
2309320	475	0.00350	on request	2309345	1350	0.007	on request
2309321	500	0.00350	on request	2309346	1450	0.007	on request
2309322	525	0.00350	on request	2309347	1550	0.009	on request
2309323	550	0.00350	on request	2309348	1650	0.010	on request
2309324	575	0.00350	on request	2309349	1750	0.010	on request
2309325	600	0.00350	on request	2309350	1850	0.011	on request
2309326	625	0.00400	on request	2309351	1950	0.012	on request

Thread Setting Gauges

DIN 863

for external measuring

- hardened steel surfaces
- with insulation plates



ISO


DIN

ART No metr. ISO 60°	ART No whitworth 55°	mm	mm	ART No ISO trapez (DIN 103)	available for the following thread pitches mm	mm	CC
2304216-001	2304215-501	25	0.003	2304216-501	2 / 3 / 4 / 5 - 6 / 7 - 8 / 9 - 10	0.004	on request
2304216-002	2304215-502	50	0.003	2304216-502	2 / 3 / 4 / 5 - 6 / 7 - 8 / 9 - 10	0.004	on request
2304216-003	2304215-503	75	0.003	2304216-503	2 / 3 / 4 / 5 - 6 / 7 - 8 / 9 - 10	0.004	on request
2304216-004	2304215-504	100	0.004	2304216-504	3 / 4 / 5 - 6 / 7 - 8 / 9 - 10 / 12 - 14	0.005	on request
2304216-005	2304215-505	125	0.004	2304216-505	4 / 5 - 6 / 7 - 8 / 9 - 10 / 12 - 14	0.005	on request
2304216-006	2304215-506	175	0.004	2304216-506	4 / 5 - 6 / 7 - 8 / 9 - 10 / 12 - 14	0.005	on request
2304216-007	2304215-507	225	0.004	2304216-507	5 - 6 / 7 - 8 / 9 - 10 / 12 - 14	0.005	on request
2304216-008	2304215-508	275	0.004	2304216-508	5 - 6 / 7 - 8 / 9 - 10 / 12 - 14	0.005	on request

Micrometer Stands

Micrometer Stand

- with stable base
- made of cast iron
- hammer blow lacquered
- clamps equipped with rubber, to protect the instruments
- clamps rotate in axially position
- with fixing screw



ART NO

239004

for micrometer measuring range
mm


→ **mm** ←

0 – 100

165 x 120 x 120

Micrometer Stand

- with stable base
- steel version
- hammer blow lacquered
- clamps equipped with rubber, to protect the instruments
- clamps rotate in axially position
- with central fixing

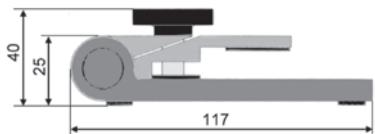

ART NO

239005

for micrometer measuring range
mm

→ **mm** ←

0 – 100

117 x 70 x 40

Repair Service

Our well experienced service department offers you all usually repairs of our products. Require our service for all kind of:

- repair or replacement
- general overhaul of **VOGEL GERMANY** measuring tools and devices




Electr. Digital Micrometer Head • IP65

DIN 863

- splash water proof acc. to DIN 40050 / IEC 6052

- LCD display with clear reading
- with carbide surfaces, flat, lapped, rotating spindle hardened and ground
- mm/inch switchable, with ABS/INC measurement system, SET function
- On/Off button, zero setting at any position
- incl. 1x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual

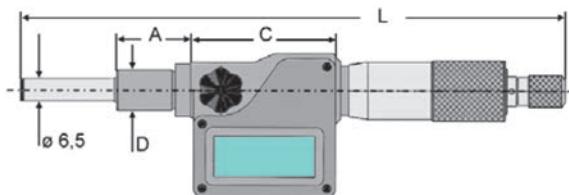


ART No	mm / inch	mm / inch	Ø mm	Ø mm	A mm	C mm	D mm	L mm	max. mm	CC
231287	0 – 25 / 0 – 1	0.001 / 0.00005	18	0.5	17.5	47.6	12	165.5	0.003	on request

Micrometer Head

DIN 863

- drum and sleeve matt chrome finish
- hardened, rotating spindle, carbide, ground thread
- measuring surface in flat version, finely ground lapped

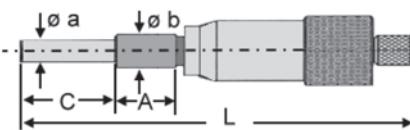

ART No	mm	mm	Ø mm	Ø mm	A mm	C mm	L mm	Ø a mm	Ø b mm	max. mm	CC
231012	0 – 25	0.01	23	0.5	17.5	28.5	113	6.5	12	0.003	on request

Explore our
Website.

www.vogel-germany.de



VOGEL
GERMANY
Measuring Solutions

Any questions?

We are pleased to advise.

Precision Depth Gauges

Precision Depth Gauge

- suitable for standard requirements

- drum and sleeve matt chrome finish
- measuring pin and surface hardened and ground
- measuring face half round shape
- clamping screw for quick and precise fixing
- with ratchet for constant measuring pressure



ART No	mm	mm	Ø mm	mm	mm	measuring pin-Ø mm	quantity of pins	mm	CC
231800	0 – 25	0.01	18	0.5	63 x 18	4.5	1	0.004	on request
231801	0 – 25	0.01	18	0.5	100 x 18	4.5	1	0.004	on request
231802	0 – 100	0.01	18	0.5	100 x 18	4.5	4	0.005	on request
231803	0 – 150	0.01	18	0.5	100 x 18	4.5	6	0.005	on request

Precision Depth Gauge

DIN 863

- high standard quality, for calibration purposes

- drum and sleeve matt chrome finish
- measuring pin and surface hardened and fine ground
- measuring face plane ground and lapped
- clamping wheel for quick and precise fixing
- with ratchet for constant measuring pressure



ART No	mm	mm	Ø mm	mm	mm	measuring pin-Ø mm	quantity of pins	mm	CC
230812	0 – 75	0.01	20	0.5	50 x 17	4.0	3	0.005	on request
230814	0 – 100	0.01	20	0.5	100 x 17	4.0	4	0.005	on request
230815	0 – 150	0.01	20	0.5	100 x 17	4.0	6	0.006	on request
230816	0 – 200	0.01	20	0.5	100 x 17	4.0	8	0.007	on request
230818	0 – 300	0.01	20	0.5	100 x 17	4.0	12	0.009	on request

Precision Digital Internal Micrometers


Electr. Digital Depth Micrometer

- absolute System, high accuracy, with data output RS232

- LCD display with clear reading, mm/inch switchable
- frame lacquered, with insulation plates
- ORIGIN button, ABS/INC measurement system
- zero setting at any position, On/Off button
- clamp wheel for quick and precise fixing
- measuring pins and surface hardened and ground
- exchangeable measuring pins, half round shape
- no need to readjust after the change of anvils
- with ratchet for constant measuring pressure
- incl. 1x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual

Option

- data transfer via cable, art.-no.: 2323100, see page 334

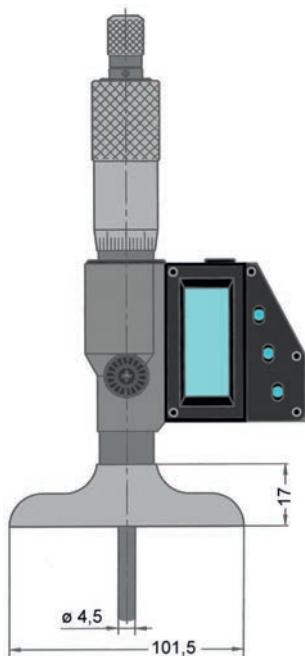

ART NO	mm / inch	mm / inch	Ø mm	mm	quantity of pins	max.	CC
						mm	
231830	0 – 25 / 0 – 1	0.001 / 0.00005	18	0.5	1	0.004	on request
231831	0 – 50 / 0 – 2	0.001 / 0.00005	18	0.5	2	0.004	on request
231833	0 – 100 / 0 – 4	0.001 / 0.00005	18	0.5	4	0.005	on request
231836	0 – 300 / 0 – 12	0.001 / 0.00005	18	0.5	12	0.007	on request


Electr. Digital Internal Micrometer

- for easy and rapid measurement of various internal intervals
- Absolute Measuring System, with data output RS232

- LCD display with clear reading, mm/inch switchable
- frame lacquered, with insulation plates, rounded carbide surfaces
- ORIGIN button, ABS/INC measurement system
- zero setting at any position, On/Off switch
- clamp wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- incl. 1x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual
- art.-no. 231620 with setting ring

Option

- data transfer via cable, art.-no.: 2323100, see page 334



ART NO	mm / inch	mm / inch	Ø mm	mm	max.	CC
					mm	
231620	5 – 30 / 0.2 – 1.2	0.001 / 0.00005	18	0.5	0.003	on request
231621	25 – 50 / 1.0 – 2.0	0.001 / 0.00005	18	0.5	0.003	on request
231622	50 – 75 / 2.0 – 3.0	0.001 / 0.00005	18	0.5	0.004	on request
231623	75 – 100 / 3.0 – 4.0	0.001 / 0.00005	18	0.5	0.004	on request
231624	100 – 125 / 4.0 – 5.0	0.001 / 0.00005	18	0.5	0.005	on request
231625	125 – 150 / 5.0 – 6.0	0.001 / 0.00005	18	0.5	0.005	on request
231626	150 – 175 / 6.0 – 7.0	0.001 / 0.00005	18	0.5	0.005	on request
231627	175 – 200 / 7.0 – 8.0	0.001 / 0.00005	18	0.5	0.005	on request


Precision Internal Micrometers

Internal Micrometer Set

DIN 863

- spring loaded end gauges
- with screw-on extensions
- up to 6000 mm measuring range available

- drum and sleeve matt chrome finish
- carbide equipped measuring heads, spherically lapped, $\varnothing 7 \times 6$ mm
- high accuracy because of spring loaded measuring end
- with insulation handle
- individual packed extensions are available on request

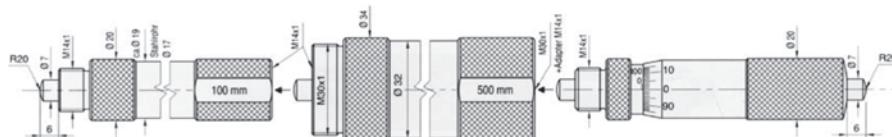


ART NO	mm	mm	mm	quantity of anvils with ...		max. mm	CC
				... tube- \varnothing 17 mm	... tube- \varnothing 32 mm		
230440	100 – 200	0.01	0.5	50		0.005	on request
230441	100 – 300	0.01	0.5	50 / 100		0.007	on request
230442	100 – 500	0.01	0.5	50 / 100 / 200		0.009	on request
230443	100 – 900	0.01	0.5	50 / 100 / 200 / 400		0.011	on request
230444	100 – 1300	0.01	0.5	50 / 100 / 200 / 400		0.013	on request
230445	100 – 1700	0.01	0.5	50 / 100 / 200 / 400 / 800		0.015	on request
230446	100 – 2100	0.01	0.5	50 / 100 / 200 / 400 / 800		0.018	on request
230447	100 – 2500	0.01	0.5	50 / 100 / 200 / 400 / 800		0.021	on request
230448	100 – 2000	0.01	0.5	50 / 100 / 200	500 / 1x1000	0.018	on request
230449	100 – 3000	0.01	0.5	50 / 100 / 200	500 / 2x1000	0.030	on request
230470	100 – 4000	0.01	0.5	50 / 100 / 200	500 / 3x1000	0.040	on request
230471	100 – 5000	0.01	0.5	50 / 100 / 200	500 / 4x1000	0.050	on request
230472	100 – 6000	0.01	0.5	50 / 100 / 200	500 / 5x1000	0.060	on request

Internal Micrometer Set

DIN 863

- resiliently mounted end gauges
- with screw-on extensions
- up to 1450 mm measuring range available

- drum and sleeve matt chrome finish
- carbide equipped measuring heads, spherically lapped, R20 mm
- with insulation handle
- individual packed extensions are available on request

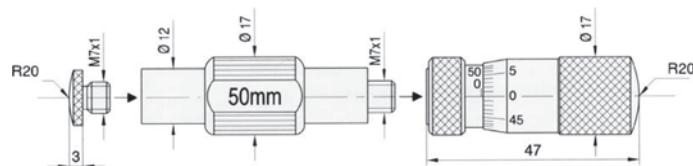

ART NO	mm	mm	mm	quantity of anvils with tube- \varnothing 17 mm		max. mm	CC
				25 / 50	100		
230880	50 – 150	0.01	0.5	25 / 50		0.006	on request
230881	50 – 250	0.01	0.5	25 / 50 / 100		0.008	on request
230882	50 – 300	0.01	0.5	25 / 50 / 50 / 100		0.009	on request
230883	50 – 450	0.01	0.5	25 / 50 / 100 / 200		0.010	on request
230884	50 – 850	0.01	0.5	25 / 50 / 100 / 200 / 400		0.012	on request
230885	50 – 1450	0.01	0.5	25 / 50 / 100 / 200 / 400 / 600		0.015	on request


Precision Internal Micrometers

Internal Micrometer

DIN 863

- drum and sleeve matt chrome finish
- carbide equipped measuring heads, spherically lapped, \varnothing 6 mm
- from up 100 mm with clamping ring and with insulation handle
- please order the wooden box with the separate art.-no.

Other sizes available
on request!

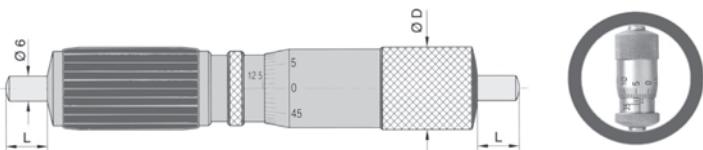

ART N°	mm	mm	mm	\varnothing D mm	L mm	mm	CC	ART N° wooden box
230740	25 – 30	0.01	0.5	15	1.5	0.003	on request	2399740
230741	30 – 35	0.01	0.5	15	1.5	0.003	on request	2399741
230742	35 – 50	0.01	0.5	15	1.5	0.003	on request	2399742
230743	50 – 75	0.01	0.5	16	1.5	0.003	on request	2399743
230744	75 – 100	0.01	0.5	17	6	0.003	on request	2399744
230745	100 – 125	0.01	0.5	20	6	0.003	on request	2399745
230746	125 – 150	0.01	0.5	20	10	0.003	on request	2399746
230747	150 – 175	0.01	0.5	20	10	0.004	on request	2399747
230748	175 – 200	0.01	0.5	20	10	0.004	on request	2399748
230749	200 – 225	0.01	0.5	20	10	0.004	on request	2399749
230750	225 – 250	0.01	0.5	20	10	0.004	on request	2399750
230751	250 – 275	0.01	0.5	20	10	0.004	on request	2399751
230752	275 – 300	0.01	0.5	20	10	0.004	on request	2399752
230753	300 – 325	0.01	0.5	20	10	0.004	on request	2399753
230754	325 – 350	0.01	0.5	20	10	0.004	on request	2399754
230755	350 – 375	0.01	0.5	20	10	0.004	on request	2399755
230756	375 – 400	0.01	0.5	20	10	0.004	on request	2399756
230757	400 – 425	0.01	0.5	20	10	0.004	on request	2399757
230758	425 – 450	0.01	0.5	20	10	0.004	on request	2399758
230759	450 – 475	0.01	0.5	20	10	0.004	on request	2399759
230760	475 – 500	0.01	0.5	20	10	0.004	on request	2399760
230761	500 – 525	0.01	0.5	20	10	0.005	on request	2399761
230762	525 – 550	0.01	0.5	20	10	0.005	on request	2399762
230763	550 – 575	0.01	0.5	20	10	0.005	on request	2399763
230764	575 – 600	0.01	0.5	20	10	0.005	on request	2399764
230765	600 – 625	0.01	0.5	20	10	0.005	on request	2399765
230766	625 – 650	0.01	0.5	20	10	0.005	on request	2399766
230767	650 – 675	0.01	0.5	20	10	0.005	on request	2399767
230768	675 – 700	0.01	0.5	20	10	0.005	on request	2399768
230769	700 – 725	0.01	0.5	20	10	0.005	on request	2399769
230770	725 – 750	0.01	0.5	20	10	0.005	on request	2399770
230771	750 – 775	0.01	0.5	20	10	0.005	on request	2399771

Holder for Internal Micrometers

- allows insertion in deep, narrow bores
- especially for small measuring ranges



ART N°

230739

mm

220



BOWERS

Special applications...



We are also for special applications your point of contact!

Our partner BOWERS produces considerable explanation of bore gauges and inside micrometers. If your application from the standard range of equipment is not covered, contact us, we also develop probes for specific applications.

We will advise you, for free
and without obligation.

Digital 2-/3-Point Bore Gauges

Bowers • Electr. Digital 3-Point Bore Gauges • IP67

- with integrated Bluetooth® technology
- water- and coolant proof acc. to DIN 40050 / IEC 60529
- for through holes and from up 12.5 mm for blind holes also
- Proximity-USB / RS232 output
- large LCD display with clear reading, digit height 9 mm
- bi-directional communication, ratchet stop, to ensure constant measuring force
- from up 12.5 mm with carbide measuring faces, „0“-setting at any position
- On-/Off-button, mm/inch switchable, data hold function
- 4 preset memories, simple 2-button operation
- incl. setting ring, UKAS certificates for instruments and setting rings
- incl. 1x 3 V battery (CR2032, art.-no.: 90112), with operation manual



Options

- other measuring ranges and other measuring heads available on request!
- extensions can be found on page 123



ART NO	mm / inch	mm / inch	mm	meas. depth mm	Ø mm	CC
230631-BT	6 – 8 / 0.25 – 0.3	0.001 / 0.00005	0.004	58	8.0	inclusive
230632-BT	8 – 10 / 0.3 – 0.4	0.001 / 0.00005	0.004	58	8.0	inclusive
230633-BT	10 – 12.5 / 0.4 – 0.5	0.001 / 0.00005	0.004	58	12.5	inclusive
230634-BT	12.5 – 16 / 0.5 – 0.6	0.001 / 0.00005	0.004	62	12.5	inclusive
230635-BT	16 – 20 / 0.6 – 0.8	0.001 / 0.00005	0.004	62	20.0	inclusive
230636-BT	20 – 25 / 0.8 – 1	0.001 / 0.00005	0.004	66	20.0	inclusive
230637-BT	25 – 35 / 1 – 1.37	0.001 / 0.00005	0.004	66	35.0	inclusive
230638-BT	35 – 50 / 1.37 – 2	0.001 / 0.00005	0.004	80	35.0	inclusive
230639-BT	50 – 65 / 2 – 2.55	0.001 / 0.00005	0.005	80	65.0	inclusive
230640-BT	65 – 80 / 2.55 – 3.15	0.001 / 0.00005	0.005	80	65.0	inclusive
230641-BT	80 – 100 / 3.15 – 4	0.001 / 0.00005	0.005	100	80.0	inclusive
230642-BT	100 – 125 / 4 – 5	0.001 / 0.00005	0.006	115	125.0	inclusive
230643-BT	125 – 150 / 5 – 6	0.001 / 0.00005	0.006	115	125.0	inclusive
230644-BT	150 – 175 / 6 – 7	0.001 / 0.00005	0.007	115	175.0	inclusive
230645-BT	175 – 200 / 7 – 8	0.001 / 0.00005	0.007	115	175.0	inclusive
230646-BT	200 – 225 / 8 – 9	0.001 / 0.00005	0.008	118	225.0	inclusive
230647-BT	225 – 250 / 9 – 10	0.001 / 0.00005	0.008	118	225.0	inclusive
230648-BT	250 – 275 / 10 – 11	0.001 / 0.00005	0.009	118	275.0	inclusive
230649-BT	275 – 300 / 11 – 12	0.001 / 0.00005	0.009	118	275.0	inclusive

Bowers • Electr. Digital 2-/3-Point Bore Gauge Set • IP67

- with integrated Bluetooth® technology
- water- and coolant proof acc. to DIN 40050 / IEC 60529
- for through holes and from up 12.5 mm for blind holes also



OPTIONS
see above

- Proximity-USB / RS232 output
- large LCD display with clear reading, digit height 9 mm
- bi-directional communication, ratchet stop, to ensure constant measuring force
- from up 12.5 mm with carbide measuring faces, „0“-setting at any position
- On-/Off-button, mm/inch switchable, data hold function
- 4 preset memories, simple 2-button operation
- incl. setting ring, UKAS certificates for instruments and setting rings
- incl. 1x 3 V battery (CR2032, art.-no.: 90112), with operation manual



ART NO	mm / inch	mm / inch	mm	meas. depth mm	meas. heads amount	Ø mm	CC
2-Point Bore Gauge Set							
230611-BT	2 – 6 / 0.08 – 0.25	0.001 / 0.00005	0.004	9 / 12 / 18	5	3	inclusive
3-Point Bore Gauge Sets							
230612-BT	6 – 10 / 0.25 – 0.4	0.001 / 0.00005	0.004	58	2	1	inclusive
230613-BT	10 – 20 / 0.4 – 0.8	0.001 / 0.00005	0.004	58 / 62	3	2	inclusive
230614-BT	20 – 50 / 0.8 – 2	0.001 / 0.00005	0.004	66 / 80	3	2	inclusive
230615-BT	50 – 100 / 2 – 4	0.001 / 0.00005	0.005	80 / 100	3	2	inclusive
230616-BT	100 – 150 / 4 – 6	0.001 / 0.00005	0.006	115	2	1	inclusive
230617-BT	150 – 200 / 6 – 8	0.001 / 0.00005	0.007	115	2	1	inclusive
230618-BT	100 – 200 / 4 – 8	0.001 / 0.00005	0.006 / 0.007	115	4	2	inclusive


Digital 2-/3-Point Bore Gauges

Bowers • Electr. Digital 3-Point Pistol Grip Bore Gauge • IP67

- with integrated Bluetooth® technology
- water- and coolant proof acc. to DIN 40050 / IEC 60529
- XT3 „Holematic“, with Sylvac-Electronic
- for through holes and from up 12.5 mm for blind holes also
- Proximity-USB / RS232 data output
- large LCD display with clear reading, digit height 9 mm
- bi-directional communication, easy handling, with rugged grip
- from up 12.5 mm with carbide measuring faces, „0“-setting at any position
- On-/Off-button, mm/inch switchable, data hold function
- 4 preset memories, simple 2-button operation
- incl. setting ring, UKAS certificates for instruments and setting rings
- incl. 1x 3 V battery (CR2032, art.-no.: 90112), with operation manual

Options

- other measuring ranges and other measuring heads available on request!
- extensions can be found on page 123



ART No	mm / inch	mm / inch	mm	meas. depth mm	Ø mm	CC
230976-BT	6 – 8 / 0.25 – 0.3	0.001 / 0.00005	0.004	58	8.0	inclusive
230977-BT	8 – 10 / 0.3 – 0.4	0.001 / 0.00005	0.004	58	8.0	inclusive
230978-BT	10 – 12.5 / 0.4 – 0.5	0.001 / 0.00005	0.004	58	12.5	inclusive
230979-BT	12.5 – 16 / 0.5 – 0.6	0.001 / 0.00005	0.004	62	12.5	inclusive
230980-BT	16 – 20 / 0.6 – 0.8	0.001 / 0.00005	0.004	62	20.0	inclusive
230981-BT	20 – 25 / 0.8 – 1	0.001 / 0.00005	0.004	66	20.0	inclusive
230982-BT	25 – 35 / 1 – 1.37	0.001 / 0.00005	0.004	66	35.0	inclusive
230983-BT	35 – 50 / 1.37 – 2	0.001 / 0.00005	0.004	80	35.0	inclusive
230984-BT	50 – 65 / 2 – 2.55	0.001 / 0.00005	0.005	80	65.0	inclusive
230985-BT	65 – 80 / 2.55 – 3.15	0.001 / 0.00005	0.005	80	65.0	inclusive
230986-BT	80 – 100 / 3.15 – 4	0.001 / 0.00005	0.005	100	80.0	inclusive
230987-BT	100 – 125 / 4 – 5	0.001 / 0.00005	0.006	115	125.0	inclusive
230988-BT	125 – 150 / 5 – 6	0.001 / 0.00005	0.006	115	125.0	inclusive
230989-BT	150 – 175 / 6 – 7	0.001 / 0.00005	0.007	115	175.0	inclusive
230990-BT	175 – 200 / 7 – 8	0.001 / 0.00005	0.007	115	175.0	inclusive
230991-BT	200 – 225 / 8 – 9	0.001 / 0.00005	0.008	118	225.0	inclusive
230992-BT	225 – 250 / 9 – 10	0.001 / 0.00005	0.008	118	225.0	inclusive
230993-BT	250 – 275 / 10 – 11	0.001 / 0.00005	0.009	118	275.0	inclusive
230994-BT	275 – 300 / 11 – 12	0.001 / 0.00005	0.009	118	275.0	inclusive

Bowers • Electr. Digital 2-/3-Point Pistol Grip Bore Gauge Sets • IP67

- with integrated Bluetooth® technology
- water- and coolant proof acc. to DIN 40050 / IEC 60529
- XT3 „Holematic“, with Sylvac-Electronic
- for through holes and from up 12.5 mm for blind holes also
- Proximity-USB / RS232 data output
- large LCD display with clear reading, digit height 9 mm
- bi-directional communication, easy handling, with rugged grip
- from up 12.5 mm with carbide measuring faces, „0“-setting at any position
- On-/Off-button, mm/inch switchable, data hold function
- 4 preset memories, simple 2-button operation
- incl. setting ring, UKAS certificates for instruments and setting rings
- incl. 1x 3 V battery (CR2032, art.-no.: 90112), with operation manual

OPTIONS
see above



ART No	mm / inch	mm / inch	mm	meas. depth mm	meas. heads amount	Ø mm	CC
2-Point Bore Gauge Set							
230840-BT	2 – 6 / 0.08 – 0.25	0.001 / 0.00005	0.004	9 / 12 / 18	5	3	inclusive
3-Point Bore Gauge Sets							
230841-BT	6 – 10 / 0.25 – 0.4	0.001 / 0.00005	0.004	58	2	1	inclusive
230842-BT	10 – 20 / 0.4 – 0.8	0.001 / 0.00005	0.004	58 / 62	3	2	inclusive
230843-BT	20 – 50 / 0.8 – 2	0.001 / 0.00005	0.004	66 / 80	3	2	inclusive
230844-BT	50 – 100 / 2 – 4	0.001 / 0.00005	0.005	80 / 100	3	2	inclusive
230845-BT	100 – 150 / 4 – 6	0.001 / 0.00005	0.006	115	2	1	inclusive
230846-BT	150 – 200 / 6 – 8	0.001 / 0.00005	0.007	115	2	1	inclusive
230847-BT	100 – 200 / 4 – 8	0.001 / 0.00005	0.006 / 0.007	115	4	2	inclusive

Special Digital 2-/3-Point Bore Gauges

Bowers • Electr. Digital 3-Point Bore Gauge Sets • IP67

- with integrated Bluetooth® technology
- water- and coolant proof acc. to DIN 40050 / IEC 60529
- Bowers Model „XT500“, with Sylvac-Electronic
- designed specifically for the measurement of internal diameters between 300 – 500 mm
- measuring head with exchangeable anvils

- Proximity-USB / RS232 data output
- large LCD display with clear reading, digit height 9 mm
- hardened, radiussed measuring anvils provide optimum centralisation in the part
- anvil sets are supplied in 25 mm steps, each set has been manufactured to exact tolerance size
- the 300 – 325 mm anvils are the master reference set and are used for setting gauge in the setting ring
- only one 300 mm setting ring is required to set the gauge for all diameters in the full 300 – 500 mm range of the instrument
- bi-directional communication, ratchet stop, to ensure constant measuring force
- On-/Off-button, mm/inch switchable, data hold function, simple 2-button operation
- 4 preset memories, simple 2-button operation
- incl. setting ring with UKAS certificate for setting ring
- incl. 1x 3 V battery (CR2032, art.-no. 90112), with operation manual

Option

- extensions for deeper bores 150 / 500 / 1000 mm available on request



application example



ART NO	mm / inch	mm	max. mm	mm	meas. depth mm	Ø mm	CC
230437-BT	300 – 400 / 12 – 16	0.01 / 0.0001 0.0005 / 0.00005	0.015	0.003	120	300	inclusive
230438-BT	300 – 325 / 400 – 500 12 – 12.8 / 16 – 20	0.01 / 0.0001 0.0005 / 0.00005	0.015	0.003	120	300	inclusive
230439-BT	300 – 500 / 12 – 20	0.01 / 0.0001 0.0005 / 0.00005	0.015	0.003	120	300	inclusive

Bowers • Electr. Digital 2-Point Bore Gauge Sets • IP65

- water- and coolant proof acc. to DIN 40050 / IEC 60529
- Micro Gauge, with Sylvac-Electronic
- designed specifically for the measurement of small bores between 1.0 – 10.0 mm

- Proximity-USB / RS232 data output
- slimline LCD display with clear reading, digit height 7 mm
- switchable resolution 0.01 / 0.001 / 0.0005 mm
- hard-chromed ball-contacts
- On-/Off-button, mm/inch switchable, data hold function, simple 2-button operation
- Linearity: Ø 1.0 – 1.5 max. 2% of measuring travel, min. 0.001 mm,
Ø 1.5 – 10 mm max. 1% of measuring travel, min. 0.001 mm
- incl. setting ring with UKAS certificate for setting ring
- incl. 2x 1.5 V battery (LR44, art.-no. 90213), with operation manual



Options

- also available as single devices with various measuring ranges on request
- data transfer via WiFi, art.-no. 2023104 + 2023105, see page 334



ART NO	mm / inch	mm	max. mm	meas. depth mm	Ø mm	CC
230190	0.95 – 1.55 / 0.037 – 0.045	0.01 / 0.001 / 0.0005	0.001	0.6 – 11	5	inclusive
230191	1.50 – 2.45 / 0.059 – 0.096	0.01 / 0.001 / 0.0005	0.001	0.9 – 17	4	inclusive
230192	2.25 – 4.25 / 0.089 – 0.167	0.01 / 0.001 / 0.0005	0.001	1.2 – 22	7	inclusive
230193	3.65 – 6.35 / 0.144 – 0.250	0.01 / 0.001 / 0.0005	0.001	2.0 – 40	5	inclusive
230194	6.15 – 8.35 / 0.242 – 0.329 8.15 – 10.35 / 0.321 – 0.408	0.01 / 0.001 / 0.0005	0.001	2.0 – 40 2.0 – 50	8	inclusive

Accessoires for 2-/3-Point Bore Gauges

Bowers • Accessories for Analogue- and Electr. Digital 3-Point Bore Gauges

- extensions in different length
- depth stop for measuring range 2 – 6 mm

 <p>Extension</p>	ART No  mm	for measuring heads
	230651	63
	230652	76
	230653	100
	230654	150
	230655	50 – 300

 <p>Depth Stop for Electr. Digital 3-Point Bore Gauges</p>	ART No  mm
	230656

Bowers • Accessories for Electr. Digital 2-Point Bore Gauge (MicroGauge)

- extensions in different length
- stand for MicroGauge

 <p>Depth Stop for MicroGauge</p>	ART No  mm	for measuring heads
	230475	0.95 – 1.55
	230476	1.50 – 2.45
	230477	2.25 – 4.25
	230478	3.65 – 6.35
	230479	6.15 – 10.35

 <p>Stand for MicroGauge</p>	ART No  mm
	230658

Bowers • Accessories setting ring for XT500 Electr. Digital 3-Point Bore Gauge

- setting ring, hardened and lapped, incl. UKAS-calibration certificate

ART No  Ø mm	 CC	 
230770-3000	300	inclusive



Bowers • Accessories Data Transfer via WiFi and Bluetooth®

ART No 	wireless data transmission Transmitter module for measuring instruments with proximity interface
2023105	

ART No 	wireless data transmission USB receiver (up to 15 m distance)	
2023104		

ART No 	wireless data transmission USB transmitter Bluetooth®	
2023106		



2-/3-Point Bore Gauges

Bowers • 3-Point Bore Gauges

- for through holes and from up 12.5 mm for blind holes also
- vernier scale 6 – 20 mm with 0.002 mm
- chromed finish with clear reading, ergonomically designed
- ratchet stop to ensure constant measuring force
- from up 12.5 mm with carbide measuring faces
- incl. setting ring, UKAS certificates for instruments and setting rings, with operation manual

Option

- extensions find on page 123



ART NO	mm	mm	mm	meas.-depth mm	Ø mm	CC
230500	6 – 8	0.002	0.004	58	8.0	inclusive
230501	8 – 10	0.002	0.004	58	8.0	inclusive
230502	10 – 12.5	0.002	0.004	58	12.5	inclusive
230503	12.5 – 16	0.002	0.004	62	12.5	inclusive
230504	16 – 20	0.002	0.004	62	20.0	inclusive
230505	20 – 25	0.005	0.004	66	20.0	inclusive
230506	25 – 35	0.005	0.004	66	35.0	inclusive
230507	35 – 50	0.005	0.004	80	35.0	inclusive
230508	50 – 65	0.005	0.005	80	65.0	inclusive
230509	65 – 80	0.005	0.005	80	65.0	inclusive
230510	80 – 100	0.005	0.005	100	80.0	inclusive
230511	100 – 125	0.005	0.006	115	125.0	inclusive
230512	125 – 150	0.005	0.006	115	125.0	inclusive
230513	150 – 175	0.005	0.007	115	175.0	inclusive
230514	175 – 200	0.005	0.007	115	175.0	inclusive
230515	200 – 225	0.005	0.008	118	225.0	inclusive
230516	225 – 250	0.005	0.008	118	225.0	inclusive
230517	250 – 275	0.005	0.009	118	275.0	inclusive
230518	275 – 300	0.005	0.009	118	275.0	inclusive

Bowers • 2-/3-Point Bore Gauge Sets

- for through holes and from up 12.5 mm for blind holes also
- vernier scale 2 – 6 mm with improved resolution in 0.001 mm (micro version)
- vernier scale 6 – 20 mm with improved resolution in 0.002 mm (micro version)
- chromed finish with clear reading, ergonomically designed
- ratchet stop to ensure constant measuring force
- from up 12.5 mm with carbide measuring faces
- incl. setting ring, UKAS certificates for instruments and setting rings, with operation manual

Option

- extensions find on page 123



ART NO	mm	mm	mm	meas.-depth mm	meas.-heads amount	Ø mm	quantity	CC
2-Point Bore Gauge Sets								
230520	2 – 3	0.001	0.004	9	2	1	inclusive	
230521	3 – 6	0.001	0.004	12 / 18	3	2	inclusive	
3-Point Bore Gauge Sets								
230522	6 – 10	0.002	0.004	58	2	1	inclusive	
230523	10 – 20	0.002	0.004	58 / 62	3	2	inclusive	
230524	20 – 50	0.005	0.004	66 / 80	3	2	inclusive	
230525	50 – 100	0.005	0.005	80 / 100	3	2	inclusive	
230526	100 – 150	0.005	0.006	115	2	1	inclusive	
230527	150 – 200	0.005	0.007	115	2	1	inclusive	

Digital 3-Point Bore Gauges


Electr. Digital 3-Point Bore Micrometers • IP54

- spray water proof acc. to DIN 40050 / IEC 60529
- for bore holes and blind holes
- with data output, top model
(connectivity also for Digimatic measuring devices,
Mitutoyo compatible)

- LCD unit with clear reading, digit height 8 mm
- chromed finish, self-centering and self-aligning
- with friction ratchet for constant measuring pressure
- 6 – 12 mm with hardened measuring faces, from up 12 mm
- with tungsten carbide measuring faces
- zero setting at any position, On-/Off-button
- measuring unit switchable mm/inch, with ABS/INC-system
- data hold function, \pm preset function
- incl. setting ring and with extension rod
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112),
with operation manual

Options

- data transfer via cable, art.-no.: 2420194, see page 334
- data transfer via WiFi, art.-no.: 2040101, see page 334
- data transfer via Bluetooth®, art.-no.: 209000, see page 334



ART NO	mm / inch	mm / inch	max. mm	L1 mm	B mm	C mm	extension rod mm	Ø mm	CC
236431	6 – 8 / 0.24 – 0.32	0.001 / 0.00005	0.004	30	2.5	1.0	50	8	on request
236432	8 – 10 / 0.32 – 0.40	0.001 / 0.00005	0.004	30	2.5	1.0	50	8	on request
236433	10 – 12 / 0.40 – 0.50	0.001 / 0.00005	0.004	30	2.5	1.0	50	10	on request
236434	12 – 16 / 0.50 – 0.63	0.001 / 0.00005	0.004	48	6.3	0.4	100	16	on request
236435	16 – 20 / 0.63 – 0.80	0.001 / 0.00005	0.004	48	6.3	0.4	100	16	on request
236436	20 – 25 / 0.80 – 1.00	0.001 / 0.00005	0.004	50	9.2	0.4	150	25	on request
236437	25 – 30 / 1.00 – 1.20	0.001 / 0.00005	0.004	50	9.2	0.4	150	25	on request
236438	30 – 40 / 1.20 – 1.60	0.001 / 0.00005	0.004	50	9.2	0.4	150	30	on request
236439	40 – 50 / 1.60 – 2.00	0.001 / 0.00005	0.005	55	16.5	0.5	150	40	on request
236440	50 – 63 / 2.00 – 2.50	0.001 / 0.00005	0.005	55	16.5	0.5	150	50	on request
236441	62 – 75 / 2.45 – 3.00	0.001 / 0.00005	0.005	55	16.5	0.5	150	62	on request
236442	75 – 88 / 3.00 – 3.46	0.001 / 0.00005	0.005	55	16.5	0.5	150	87	on request
236443	87 – 100 / 3.43 – 4.00	0.001 / 0.00005	0.005	55	16.5	0.5	150	87	on request

Did you already know?

Join us for success is now
Measuring Solutions
The new slogan stands for even more
Service, Solutions and Consulting.

VOGEL®
GERMANY
Measuring Solutions

3-Point Bore Gauges




3-Point Bore Micrometers

• for bore holes and blind holes

- chromed finish, self-centering and self-aligning
- with ratchet for constant measuring pressure
- 6 – 12 mm with hardened measuring faces, from up 12 mm with tungsten carbide measuring faces
- incl. setting ring and extension rod
- with operation manual

Option

- extension rods and setting rings can be found on page 128 + 247

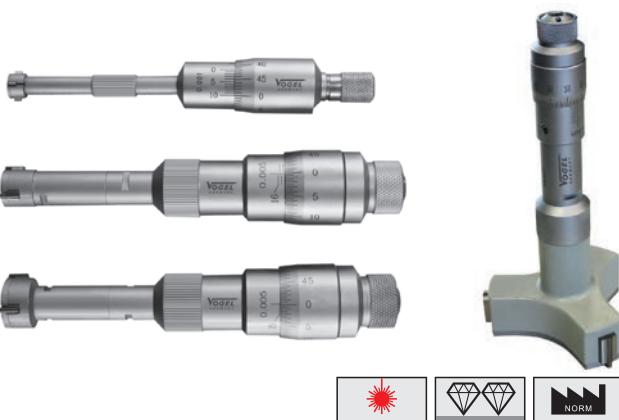

ART NO	mm	mm	mm	L1 mm	B mm	C mm	extension rod mm	Ø mm	CC
236531	6 – 8	0.001	0.004	30	2.5	1.0	50	8	on request
236532	8 – 10	0.001	0.004	30	2.5	1.0	50	8	on request
236533	10 – 12	0.001	0.004	30	2.5	1.0	50	10	on request
236534	12 – 16	0.005	0.004	48	6.3	0.4	100	16	on request
236535	16 – 20	0.005	0.004	48	6.3	0.4	100	16	on request
236536	20 – 25	0.005	0.004	50	9.2	0.4	150	25	on request
236537	25 – 30	0.005	0.004	50	9.2	0.4	150	25	on request
236538	30 – 40	0.005	0.004	50	9.2	0.4	150	30	on request
236539	40 – 50	0.005	0.005	55	16.5	0.5	150	40	on request
236540	50 – 63	0.005	0.005	55	16.5	0.5	150	50	on request
236541	62 – 75	0.005	0.005	55	16.5	0.5	150	62	on request
236542	75 – 88	0.005	0.005	55	16.5	0.5	150	87	on request
236543	87 – 100	0.005	0.005	55	16.5	0.5	150	87	on request


3-Point Bore Micrometer Set

• for bore holes and blind holes

- as set composition, with setting ring and extension rod
- chromed finish, self-centering and self-aligning
- with ratchet for constant measuring pressure
- 6 – 12 mm with hardened measuring faces, from up 12 mm with tungsten carbide measuring faces
- with operation manual

Option

- extension rods and setting rings can be found on page 128 + 247



ART NO	mm	mm	mm	mm	L1 mm	B mm	C mm	extension rod mm	Ø mm	CC
236581	6 – 12	6 – 8 8 – 10 10 – 12	0.001	0.004 0.004 0.004	30	2.5	1.0	50	8 10	on request
236582	12 – 20	12 – 16 16 – 20	0.005	0.004 0.004	48	6.3	0.4	100	16	on request
236583	20 – 50	20 – 25 25 – 30 30 – 40 40 – 50	0.005	0.004 0.004 0.004 0.004	50	9.2	0.4	150	25 40	on request
236584	50 – 100	50 – 63 62 – 75 75 – 88 87 – 100	0.005	0.005 0.005 0.005 0.005	55	16.5	0.5	150	62 87	on request


3-Point Bore Micrometers

- for bore holes and blind holes
- for large measuring range

- chromed finish, self-centering and self-aligning
- with ratchet for constant measuring pressure
- with tungsten carbide measuring faces
- incl. operation manual

Option

- extension rods and setting rings can be found on page 128 + 247



ART NO	mm	mm	mm	L1 mm	B mm	C mm	CC
236571	100 – 125	0.005	0.008	135	23	1	on request
236572	125 – 150	0.005	0.008	135	23	1	on request
236573	150 – 175	0.005	0.008	135	23	1	on request
236574	175 – 200	0.005	0.008	135	23	1	on request
236575	200 – 225	0.005	0.008	135	23	1	on request
236576	225 – 250	0.005	0.008	135	23	1	on request
236577	250 – 275	0.005	0.008	135	23	1	on request
236578	275 – 300	0.005	0.008	135	23	1	on request
236579	300 – 325	0.005	0.010	135	23	1	on request
236580	325 – 350	0.005	0.010	135	23	1	on request

Follow us on Facebook.

Never miss any news about our products, promotions and offers.



Any questions?
We are pleased to advise.

facebook.com/VogelGermany

Accessories, 3-Point Bore Micrometers, Telescopic Gauges

Extension rods for 3-Point Bore Micrometers


- extension for to reach deep measuring points in tubes



ART N°	L x Ø mm	suitable for series
236400	150 x 29	236571 – 236580
236402	50 x 5.7	236431 – 236433 / 236531 – 236533
236403	100 x 11.7	236434 – 236435 / 236534 – 236535
236404	150 x 16.7	236436 – 236437 / 236536 – 236537
236405	100 x 21.8	236438 – 236443 / 236538 – 236543

Telescopic Gauges, 6-pcs.

- in places that are hard to reach
- with standard measuring instruments
- steel made, satin chromed
- self-centering, spherical measuring faces, hardened
- constant spring pressure on the measuring faces
- with fixing device

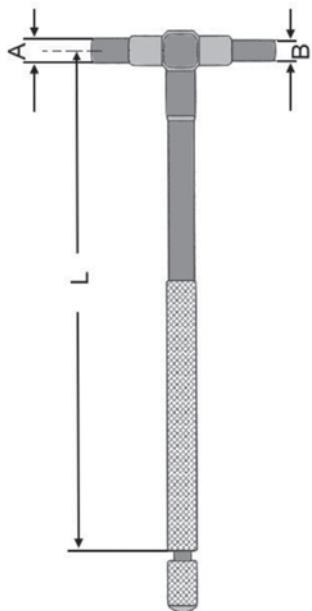

ART N° 472030



NEW



ART N° 472031



ART N°	set / mm	mm	measuring depth (L) mm	A mm	B mm
472030	8 – 150	8 – 12.7 12.7 – 19 19 – 32 32 – 54 54 – 90 90 – 150	102 102 102 127 127 127	4 5 5 7.5 7.5 7.5	3 4 4 6 6 6
472031	8 – 150	8 – 12.7 12.7 – 19 19 – 32 32 – 54 54 – 90 90 – 150	300 300 300 300 300 300	4 5 5 7.5 7.5 7.5	3 4 4 6 6 6

Bore Gauge Set with Dial Indicator

- for quick and easy measuring of bores
- standard precision, especially for workshop use
- matt chrome finish pipe, with insulation handle
- hardened contact points
- with operation manual



ART N° 237011 – 237012



ART N° 237013




ART N° 237014 – 237017



ART N°	mm	mm	quantity of contact points	quantity of distance plates	L mm	CC
237011	10 – 18	0.01	9	1	50	on request
237012	18 – 35	0.01	7	2	142	on request
237013	35 – 50	0.01	5	2	155	on request
237014	50 – 100	0.01	7	2	200	on request
237015	50 – 160	0.01	8	2	200	on request
237016	100 – 160	0.01	8	2	205	on request
237017	160 – 250	0.01	8	2	205	on request

Explore our **Website.**

www.vogel-germany.de

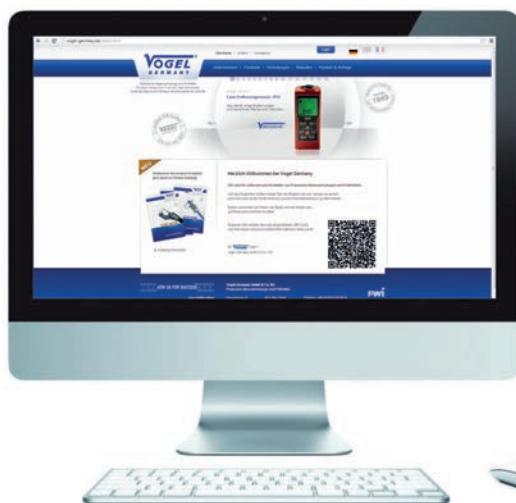



Any questions?

We are pleased to advise.

Bore Gauge Sets, Extension for Bore Gauges

Schwenk • Bore Gauge Set without Dial Indicator

- for quick and easy measuring of bores
- high precision quality, especially for workshop use
- steel tube, stainless, with insulation plate
- measuring bolts hardened or made of carbide available
- repeatability at sizes:
4.5 – 290 mm = fw <0.5 µm, 280 – 800 mm = fw <1.5 µm
- deviation range at sizes:
4.5 – 290 mm = fe <2.0 µm, 280 – 800 mm = fe <3.0 µm
- with operation manual

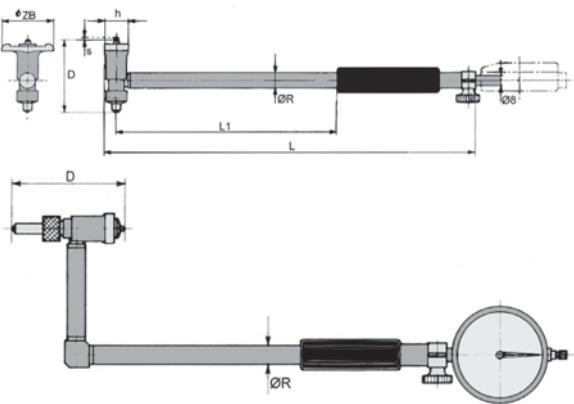

ART No steel contact points	ART No carbide contact points	D mm	quantity of contact points	L1 mm	L mm	R Ø mm	s mm	h mm	ZB Ø mm	CC
—	230720	4.5 – 6	9	80	147	4	0.35	2.00	4.0	on request
—	230721	6 – 8	7	100	165	5	0.50	2.60	5.2	on request
—	230722	8 – 12	9	100	165	5	0.70	3.25	6.5	on request
—	230723	12 – 20	9	110	204	8	0.90	4.50	9.0	on request
230700	230724	18 – 35	9	110	206	8	1.30	5.40	14.8	on request
230701	230725	35 – 60	6	138	243	10	1.30	7.00	28.0	on request
230702	230726	50 – 100	11	177	295	12	1.40	8.50	45.0	on request
230703	230727	50 – 150	11	177	295	12	1.40	8.50	45.0	on request
230704	230728	100 – 160	7	234	365	18	1.60	11.50	75.0	on request
230705	230729	100 – 230	7	234	365	18	1.60	11.50	75.0	on request
230706	230730	160 – 290	7	234	365	18	1.60	11.50	120.0	on request
230707	230731	160 – 360	7	234	365	18	1.60	11.50	120.0	on request
230708	230732	280 – 410	7	400	550	24	2.60	16.00	165.0	on request
230709	230733	280 – 510	7	400	550	24	2.60	16.00	165.0	on request
230710	230734	400 – 800	11	700	855	24	2.60	17.50	300.0	on request

Schwenk • Extension for Bore Gauges

- for internal micrometer series 230701 – 230734
- suitable from up bore-Ø 35 mm
- plug-in connection
- dial indicator shaft-Ø 8 mm




ART No	— mm	pipe-Ø mm
230790	250	12
230791	500	12
230792	750	12
230793	1000	12

ART No	— mm	pipe-Ø mm
230794	1000	18
230795	1500	18
230796	2000	18

Schwenk • Bore Gauge Zero-Setter, without Dial Indicator

- for easy zero adjustment of 2-point dial bore gauges by using blocks for series 230700 – 230734

- frame with gauge block holder
- pair of setting jaws, base and spanner
- carbide measuring jaws
- delivery **without** gauge blocks, **without** dial indicator
- with operation manual

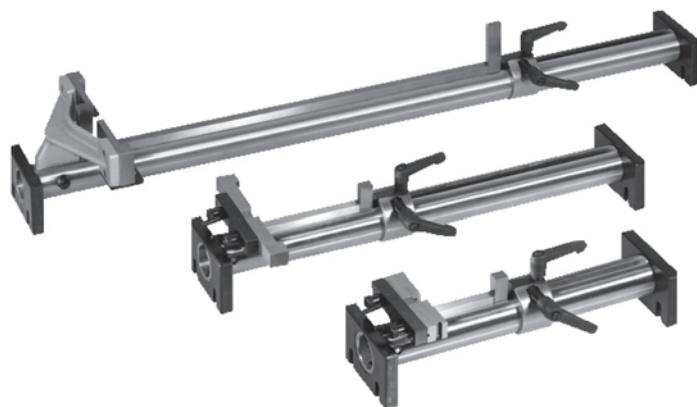

horizontal and vertical applications

ART No

setting range
mm

230950	4.5 – 35
230951	4.5 – 160
230952	4.5 – 290
230953	35 – 160
230954	35 – 290
230955	160 – 510
230956	160 – 800

Schwenk • Spare parts for Bore Gauge Zero-Setter

- suitable for series 230950 – 230956



ART No

setting jaw holder

ART No

pair of setting jaws

ART No

pair of measuring jaws

ART No

frame with spanner

ART No

base for setting up to 300 mm

230957	230958 4.5 – 35 mm	230960 4.5 – 300 mm	230962 up to 160 mm	230965
—	230959 18 – 290 mm	230961 160 – 800 mm	230963 up to 300 mm	—
—	—	—	230964 up to 600 mm	—

Saw Teeth Setting Dial Indicators and Thickness Gauge

Käfer • Saw Teeth Setting Dial Indicator

- designed to check the right setting of the saw teeth

- sturdy housing made of light metal, hammer blow lacquered
- dial on both sides, for right and left hand use
- with tolerance fingers and rotatable scale
- 4 bearing points for exact measurements
- spring loaded measuring plate, measuring plate- \varnothing 10 mm



example of application



ART NO	mm	mm	graduation mm	mm	outer ring- \varnothing mm	CC
240370	0 – 2	0.1	0.05	1	40	on request

Käfer • Thickness Gauge

- with adjustable scale

- measuring surfaces hardend, ground and lapped
- spindle and probe made of stainless steel, measuring pressure approx. 1 N
- zero setting of the display by rotating the knurled outer ring
- different but **not** exchangeable probes are available

The probe type "F" is delivered as standard!
In case of order indicate the probe type, please!



ART NO	mm	mm	thread depth mm	mm	available probes
240401	0 – 10	0.1	15	10	F G H K
240402	0 – 20	0.1	15	10	F G H K

Stylus shapes

form F standard version 6.35 mm \varnothing , flat	form G arched	form H ball shaped	form K 10 mm \varnothing , flat



Send us a
partnership request



OXOMI.com




Complete catalogue
assortment searchable
on OXOMI.com

Electr. Digital Thickness Gauge

NEW

- pocket size, with spindle lifting knob

- stainless, hardened measuring surface, rugged plastic cover
- large LCD display with clear reading, digit height 10 mm
- measuring plate Ø15 mm
- On/Off button, mm/inch switchable
- zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual



example of application



ART No	mm / inch	mm / inch	mm	mm	thread depth mm
240409	0 – 25	0.01 / 0.0005	0.01	0.02	30.0

Käfer • Thickness Gauge

DIN 878

- pocket size, with spindle lifting wheel


- measuring surfaces hardened, ground and lapped
- spindle and probe made of stainless steel, measuring pressure approx. 1 N
- reading by concentrically mm pointer
- zero setting by rotating the knurled outer ring
- different but **not** exchangeable probes are available

The probe type "F" is delivered as standard!
In case of order indicate the probe type, please!

ART No 240404



ART No 240403



DIN

ART No	mm	mm	thread depth mm	available probes	mm	CC
240403	0 – 8	0.01	12	F H	1	on request
240404	0 – 10	0.01	18	F G H K	1	on request

Stylus shapes

form F standard version 6.35 mm ø, flat	form G arched	form H ball shaped	form K 10 mm ø, flat

Did you already know?

Join us for success is now

Measuring Solutions

The new slogan stands for even more Service, Solutions and Consulting.

VOGEL®
GERMANY
Measuring Solutions

Thickness Gauges

Käfer • Thickness Gauges

DIN 878

for measuring the thickness of leather, paper, felt, rubber etc.

- frame made of light metal, hammer blow lacquered
- measuring faces hardened, ground and lapped
- spindle and probe made of stainless steel
- zero-setting of the display by rotating the knurled outer ring
- different **but not** exchangeable probes are available

The probe type "C" is delivered as standard!
In case of order indicate the probe type, please!



type P



type L



type M



type N

Contact Points




rubber, felt, soft materials	rubber, felt, soft materials	soft leather, cardboard, paper, foils	hard leather, plywood etc.	sheet metals, etc.
form A	form B	form C (standard)	form D	form E
30	20	10	10	5

ART NO	mm	mm	type	throat depth mm	available probes	mm	CC
240410	0 - 10	0.01	P	50	A B C D E	1	on request
240411	0 - 10	0.01	L	50	A B C D E	1	on request
240412	0 - 10	0.01	L	100	A B C D E	1	on request
240413	0 - 10	0.01	M	200	A B C D E	1	on request
240414	0 - 10	0.1	P	50	A B C D E	10	on request
240415	0 - 10	0.1	L	50	A B C D E	10	on request
240416	0 - 20	0.1	P	50	A B C D E	10	on request
240417	0 - 30	0.1	N	50	A B C D E	10	on request
240420	0 - 30	0.1	M	200	A B C D E	10	on request
240421	0 - 30	0.1	M	300	A B C D E	10	on request
240422	0 - 30	0.1	M	400	A B C D E	10	on request
240423	0 - 30	0.01	M	200	A B C D E	1	on request


Käfer • Thickness Gauges with Wheels

- designed for the measuring of threads, wires, strings, foils, etc.
- as special version with side discs on the lower wheel available

- frame made of solid cast iron, hammer blow lacquered
- measuring wheels hardened and ground
- scale rotateable by a knurled outer ring
- dial indicator with spindle lifting lever
- measuring pressure approx. 1.2 N



240425 without discs



240426 with side discs



ART No	mm	mm	size of wheels length x Ø mm	throat depth mm	side discs		mm	CC
					yes	no		
240425	0 - 5	0.01	8.7 x 8.4	50	—	X	1	on request
240426	0 - 5	0.01	8.7 x 8.4	50	✓	—	1	on request

Käfer • Foil Thickness Gauge

- exclusively to use to measure the thickness of thin foils

- frame made of solid cast iron, hammer blow lacquered
- with isolation handle
- measuring surfaces hardened, ground and lapped, probe-Ø 6.35 mm
- dial indicator in a dustproof housing, housing-Ø 58 mm
- measuring pressure approx. 2 N, shockproof version



example of application




ART No	mm	mm	graduation mm	throat depth mm			mm	CC
					0 - 100	30		
240400	0 - 1	0.001	0 - 100	30	—	0.1	—	on request

Quicktest "Pocotest"

- universal and handy pocket measuring instrument

- tungsten carbide measuring contact points
- with moveable contact arm
- incl. operation manual



ART No	mm	mm	L mm	Hb mm	Hf mm	F min. N	F max. N			CC
								max. mm	mm	
241420	0 - 10	0.1	36	5	5	0.3	1.3	0.1	—	on request

Dial Caliper Gauges

Kroepelin • Electr. Digital Quicktest • IP67


with µm resolution and inductive charging technology

- Quicktest in smallest design, also suitable for tablet PCs and smartphones, no additional software required
- large data logger (100 measuring values)
- available with Bluetooth® interface (up to 8 gauges simultaneously) or USB- and DIGIMATIC interface

- water and oil-tight version
- optimal readability with 250° analog display area
- with movable probe arm
- Absolute and Relative measurement program, measuring programs MIN / MAX / HOLD
- adjustable tolerance ranges
- LiPo battery with inductive charging technology, no battery change required
- numerical increment 0.001 / 0.002 / 0.005 / 0.01 mm
- switchable mm/inch




wireless charging pad with power supply



measuring contact points can be changed against additional charge



INTERFACE

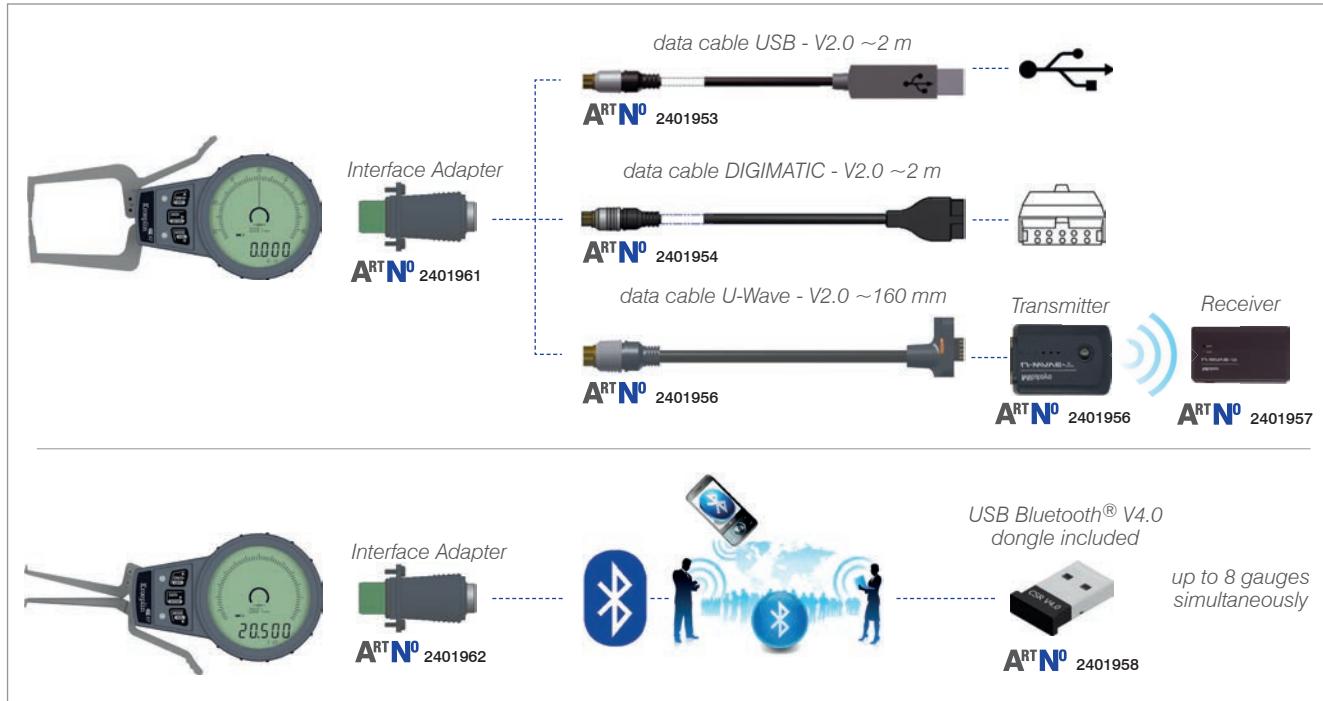

external quicktest gauge										
240550	0 – 15	0.001	K ø 1.5 mm	45	17	17	1.3	1.5	0.010	inclusive
240551	0 – 15	0.001	S R 0.4 mm	45	12	12	1.3	1.5	0.015	inclusive
internal quicktest gauge										
240555	2.5 – 12.5	0.001	S R 0.12 mm	12	0.9	0.9	0.8	1.3	0.010	inclusive
240556	5 – 20	0.001	K ø 0.6 mm	44	2.2	2.2	0.8	1.3	0.010	inclusive
240557	10 – 25	0.001	K ø 1.0 mm	46	4.4	4.4	0.8	1.3	0.010	inclusive

Kroepelin • Quicktest Gauge "Oditest" • IP65



- for measuring of external grooves, bars and flats etc.

- water proof
- tungsten carbide measuring contact points
- with moveable arm, with tolerance fingers
- zero setting by rotating the knurled outer ring

ART NO 240437



D = form of measuring contact points

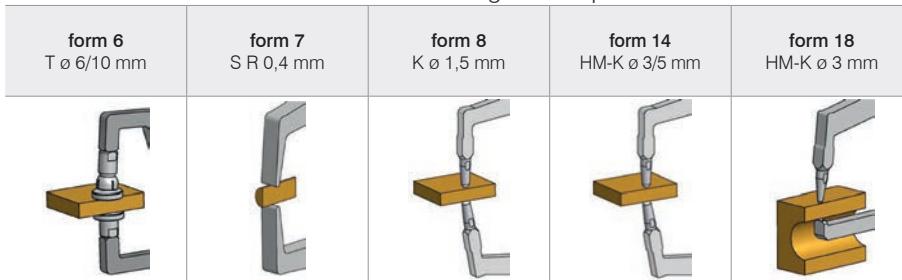


measuring contact points can be changed against additional charge



ART NO	mm	mm	form D	L mm	Hb mm	Hf mm	F min. N	F max. N	mm	CC
240435	0 – 10	0.005	6 / ø 6	35	21.7	14.8	0.8	1.2	0.02	inclusive
240435-1	0 – 20	0.01	6 / ø 10	85	28.2	20.7	1.1	1.6	0.04	inclusive
240436	0 – 20	0.01	7	85	24.6	24.6	1.1	1.6	0.03	inclusive
240437	0 – 20	0.01	8	85	24.6	24.6	1.1	1.6	0.03	inclusive
240438	0 – 50	0.05	14/ ø 3	170	32	32	1.2	1.8	0.05	inclusive
240439	0 – 50	0.05	18	170	32	1	1.2	1.8	0.05	inclusive
240440	50 – 100	0.05	14/ ø 5	170	32	32	1.2	1.8	0.075	inclusive
240441	100 – 150	0.05	14 / ø 5	170	32	32	1.2	1.8	0.075	inclusive

Explore our
Website.

www.vogel-germany.de

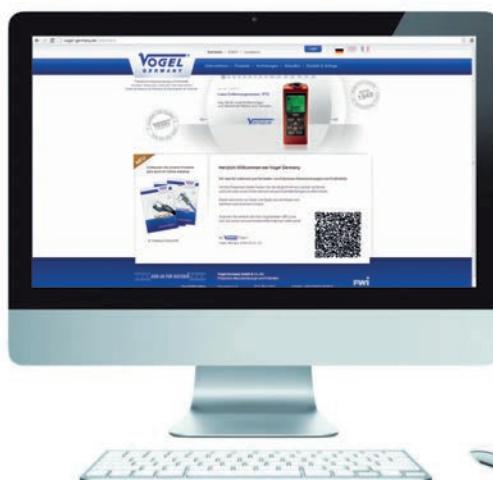

VOGEL
GERMANY
Measuring Solutions

Any questions?

We are pleased to advise.

Dial Caliper Gauges



Kroepelin • Quicktest Gauge "Intertest" • IP65

• for measuring of internal grooves, bore etc.

- water and colant proof acc. to DIN 40050 / IEC 60529
- tungsten carbide measuring contact points
- with rack gear
- with moveable contact arm
- with tolerance fingers
- incl. operation manual



D = form of measuring contact points

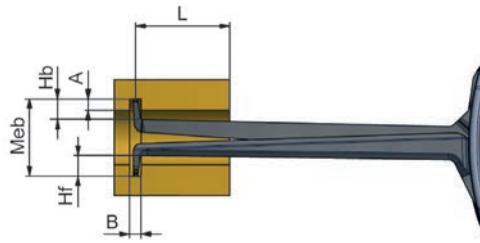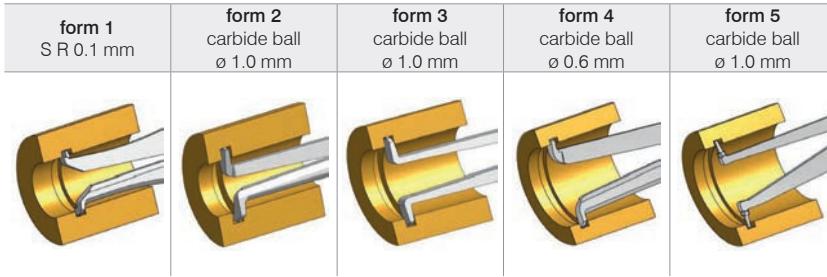


ART No	mm	mm	form	L mm	A mm	B mm	Hb mm	Hf mm	F min. N	F max. N	max. mm	CC
240530	2.5 – 12.5	0.005	1	35	0.7	0.4	0.9	0.9	0.8	1.2	0.015	inclusive
240532	5.0 – 15.0	0.005	4	35	2.3	0.8	2.5	2.5	0.8	1.2	0.015	inclusive

Kroepelin • Quicktest Gauge "Intertest" • IP65

• for measuring of internal grooves, bores, etc.

- water and colant proof acc. to DIN 40050 / IEC 60529
- tungsten carbide measuring contact points
- with steel filament drive
- with moveable contact arm
- with tolerance fingers
- incl. operation manual

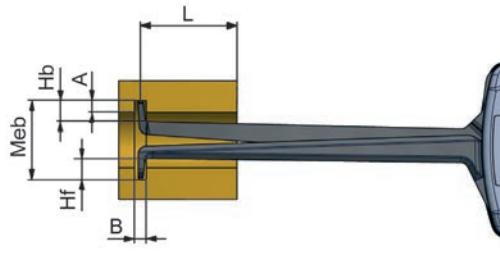


ART No	mm	mm	form	L mm	A mm	B mm	Hb mm	Hf mm	F min. N	F max. N	max. mm	CC
240539	10 – 30	0.01	2	85	5.2	1.2	5.4	5.4	1.1	1.6	0.03	inclusive
240540	20 – 40	0.01	3	85	7.0	1.2	7.3	7.3	1.1	1.6	0.03	inclusive
240541	30 – 50	0.01	3	85	7.0	1.2	7.3	7.3	1.1	1.6	0.03	inclusive
240542	40 – 60	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	inclusive
240543	50 – 70	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	inclusive
240544	60 – 80	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	inclusive
240545	70 – 90	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	inclusive
240546	80 – 100	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	inclusive

Kroeplin • Electr. Digital External Quicktest Gauge • IP67 Kroeplin • Electr. Digital Internal Quicktest Gauge • IP67

- with analogous and digital display
- with USB interface and with Mitutoyo interface (as accessories available)
- robust, rugged plastic housing, LCD-Display with clear digits
- ABS and REL measuring system, red/green display for tolerance measurement
- with tungsten carbide measuring contact points, one movable contact arm
- reading in mm/inch, numeric interval switch
- incl. 1x 1.5 V battery (type AA, art.-no.: 90003),
and operation manual



D = form of measuring contact points **external**



D = form of measuring contact points **inside**



ART No	mm	mm	form	L mm	Hb mm	Hf mm	F min. N	F max. N	max. mm	CC
external quicktest gauge										
240300	0 – 10	0.005	E / ø 1.5	35	19.1	18.6	0.8	1.2	0.005	inclusive
240301	0 – 10	0.005	C / ø 6.0	35	21.7	14.8	0.8	1.2	0.005	inclusive
240302	0 – 20	0.01	E / ø 1.5	85	24.6	24.6	1.1	1.6	0.01	inclusive
240303	0 – 20	0.01	F	85	24.6	2.5	1.1	1.6	0.01	inclusive
240307	0 – 20	0.01	D	85	28.2	20.7	1.1	1.6	0.01	inclusive
240304	0 – 30	0.02	E / ø 3.0	115	22	22	1.0	1.5	0.02	inclusive
240305	0 – 30	0.02	A / ø 3.0	115	22	1	1.0	1.5	0.02	inclusive
240306	0 – 30	0.02	D	115	22	18	1.0	1.5	0.02	inclusive
internal quicktest gauge										
240310	2.5 – 12.5	0.005	G	35	0.9	0.9	0.8	1.2	0.005	inclusive
240311	5 – 15	0.005	H	35	2.5	2.5	0.8	1.2	0.005	inclusive
240312	10 – 30	0.01	K	85	5.4	5.4	1.1	1.6	0.01	inclusive
240313	20 – 40	0.01	K	85	7.3	7.3	1.1	1.6	0.01	inclusive
240314	30 – 50	0.01	K	85	7.3	7.3	1.1	1.6	0.01	inclusive
240315	40 – 60	0.01	L	85	12.2	12.2	1.1	1.6	0.01	inclusive
240316	50 – 70	0.01	L	85	12.2	12.2	1.1	1.6	0.01	inclusive
240317	60 – 80	0.01	L	85	12.2	12.2	1.1	1.6	0.01	inclusive
240318	70 – 90	0.01	L	85	12.2	12.2	1.1	1.6	0.01	inclusive
240324	80 – 100	0.01	L	85	12.2	12.2	1.1	1.6	0.01	inclusive
240319	13 – 43	0.02	L / ø 1.5	114	4.5	2.5	1.2	1.7	0.02	inclusive
240320	30 – 60	0.02	L / ø 2.0	114	8.0	4.0	1.3	1.87	0.02	inclusive
240321	50 – 80	0.02	L / ø 2.0	114	8.0	4.0	1.3	1.87	0.02	inclusive
240322	70 – 100	0.02	L / ø 2.0	114	8.0	4.0	1.3	1.87	0.02	inclusive
240323	90 – 120	0.02	L / ø 2.0	114	8.0	4.0	1.3	1.87	0.02	inclusive

Digital Caliper Gauges

Kroepelin • Electr. Digital External Quicktest Gauge • IP67
 Kroepelin • Electr. Digital Internal Quicktest Gauge • IP67

NEW

ART No 240571





- Quicktest in handy design
- interactive keypad with touch surface and vibration feedback for easier operation
- more adjustable numerical intervals 0.001 / 0.002 / 0.005 / 0.01 / 0.02 / 0.05 mm
- new display with 250° analog display area
- suitable for use with tablet computers and smartphones
- no additional software necessary
- measuring programs for different applications MIN / MAX / HOLD
- Bluetooth® interface (up to 8 gauges simultaneously)
- 20% larger data logger (100 measuring values)
- adjustable tolerance range, mm/inch switchable
- incl. 2x 1.5 V battery (type AAA, art.-no.: 90002), with operation manual

Option

- data transfer via data cable USB – V2.0 (art.-no.: 2401961 + 2401953)
- data transfer via data cable Digimatic – V2.0 (art.-no.: 2401961 + 2401954)
- data transfer via data cable U-Wave – V2.0 (art.-no.: 2401961 + 2401956 + 2401957)
- data transfer via Bluetooth® (art.-no.: 2401962 + 2401958), see page 334

ART No 240560

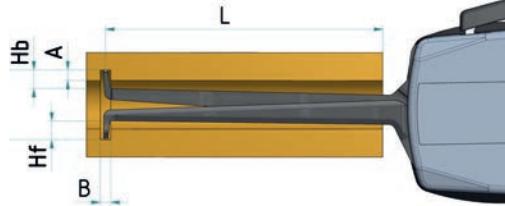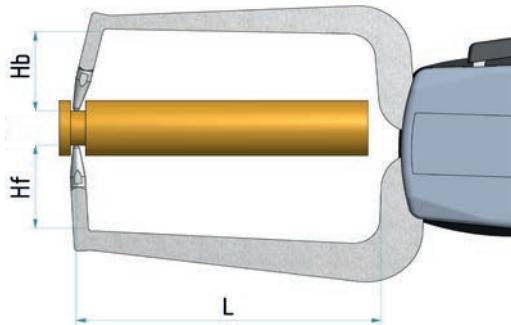

ART No



Electr. Digital External Quicktest Gauge • IP67

ART No	mm	mm	form	L	A	B	Hb	Hf	F min.	F max.	max.	CC
Electr. Digital External Quicktest Gauge • IP67												
240571	0 – 10	0.005	1	35	—	—	19.1	18.6	1.2	1.6	0.005	inclusive
240572	0 – 10	0.005	2	35	—	—	19.1	0.9	0.8	1.2	0.005	inclusive
240573	0 – 20	0.01	1	85	—	—	24.7	24.6	1.1	1.6	0.01	inclusive
240574	0 – 20	0.01	3	80	—	—	24.7	2.5	1.1	1.6	0.01	inclusive

Electr. Digital Internal Quicktest Gauge • IP67

ART No	2.5 – 12.5	0.005	4	12	0.7	0.4	0.9	0.9	0.8	1.2	0.015	inclusive
240560	2.5 – 12.5	0.005	4	12	0.7	0.4	0.9	0.9	0.8	1.2	0.015	inclusive
240561	5 – 15	0.005	5	35	2.2	0.8	2.5	2.5	0.8	1.2	0.015	inclusive
240562	10 – 30	0.01	6	85	5.0	1.7	5.3	5.3	1.1	1.6	0.03	inclusive
240563	20 – 40	0.01	7	85	6.8	1.7	7.3	7.3	1.1	1.6	0.03	inclusive
240564	30 – 50	0.01	7	85	6.8	1.7	7.3	7.3	1.1	1.6	0.03	inclusive
240565	40 – 60	0.01	8	85	8.3	1.7	8.5	8.5	1.1	1.6	0.03	inclusive
240566	50 – 70	0.01	8	85	8.3	1.7	8.5	8.5	1.1	1.6	0.03	inclusive
240567	60 – 80	0.01	8	85	8.3	1.7	8.5	8.5	1.1	1.6	0.03	inclusive
240568	70 – 90	0.01	8	85	8.3	1.7	8.5	8.5	1.1	1.6	0.03	inclusive
240569	80 – 100	0.01	8	85	8.3	1.7	8.5	8.5	1.1	1.6	0.03	inclusive

Digital Caliper Gauges


D = form of measuring contact points **external**



D = form of measuring contact points **inside**



INTERFACE

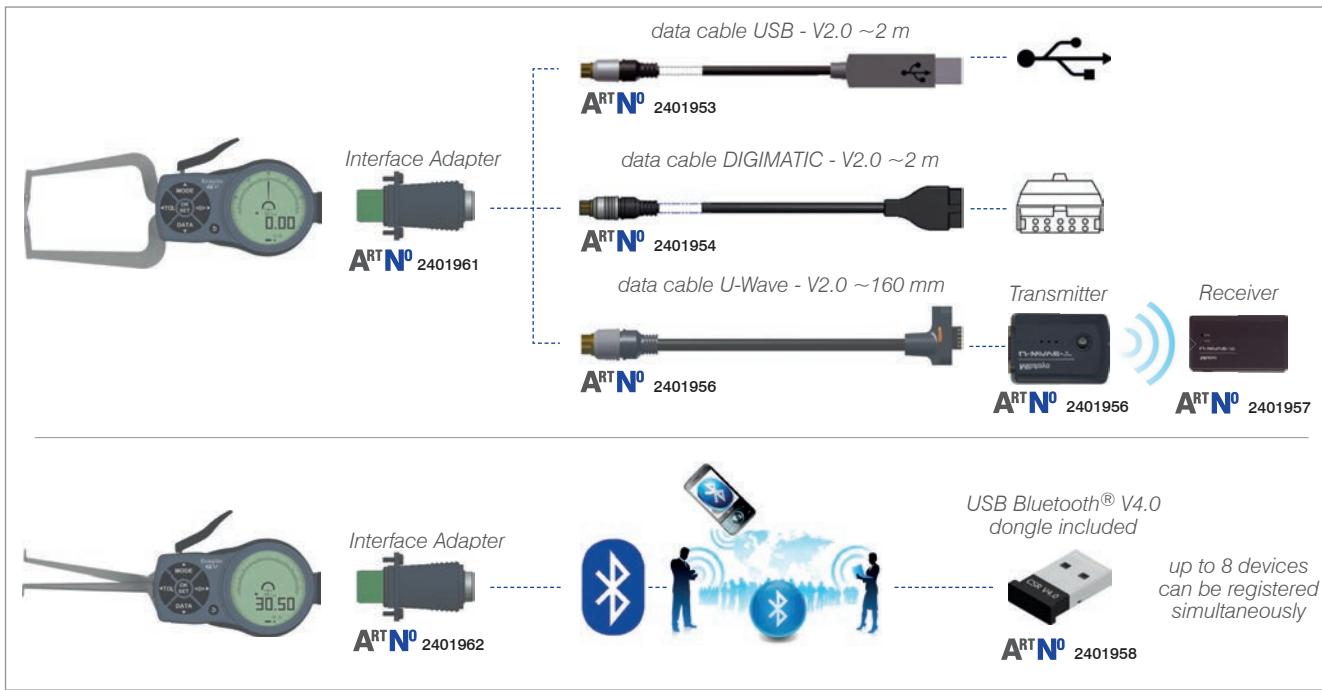

**Send us a
partnership request**



OXOMI.com




Complete catalogue
assortment searchable
on OXOMI.com

Digital Caliper Gauges



Kroepelin • Electr. Digital External Quicktest Gauge • IP67
 Kroepelin • Electr. Digital Internal Quicktest Gauge • IP67

- with extra long contact arms
- with analogous and digital display
- with USB interface and with Mitutoyo interface (as accessories available)

- robust, rugged plastic housing
- LCD-Display with clear digits
- ABS and REL measuring system
- red/green display for tolerance measurement
- with tungsten carbide measuring contact points
- one movable contact arm
- reading in mm/inch
- numeric interval switch, repeatability ± 0.04 mm
- incl. 1x 1.5 V Battery (type AA, art.-no.: 90003), with operation manual

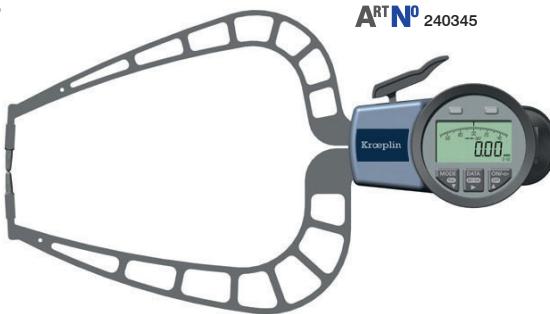

form of measuring contact points **internal / external**

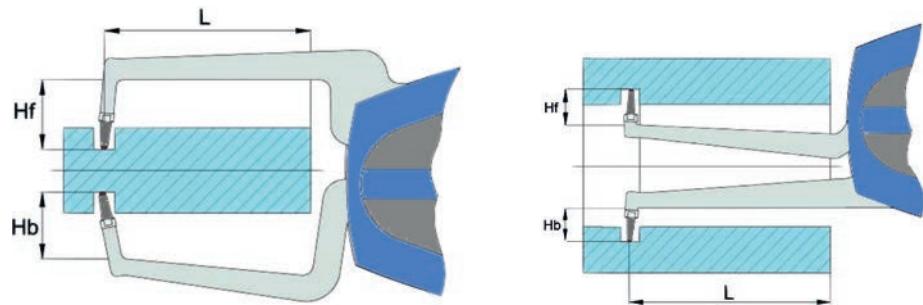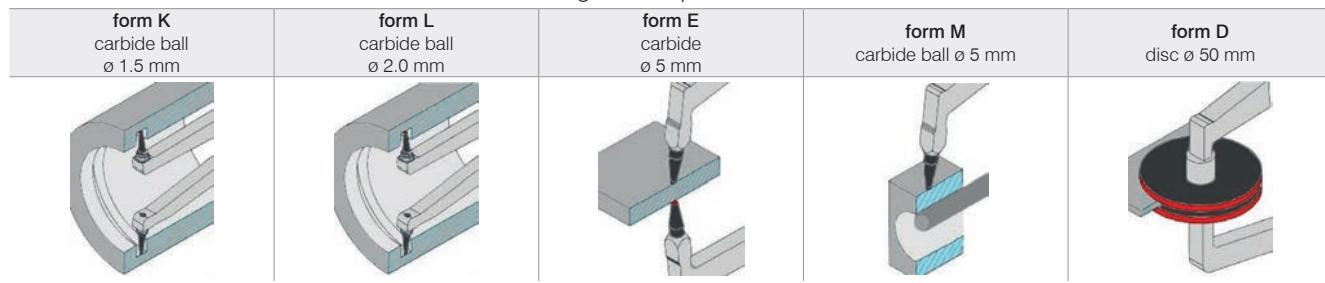

ART No	mm	mm	form	mm	mm	mm	F min. N	F max. N	mm	CC
external quicktest gauge										
240345	0 – 50	0.02	E	180	25.3	25.3	0.9	1.2	0.06	inclusive
240347	0 – 50	0.02	D	180	27.2	19.5	0.6	1.0	0.08	inclusive
internal quicktest gauge										
240336	15 – 65	0.02	K	175	4.5	2.5	1.0	1.2	0.06	inclusive
240337	40 – 90	0.02	L	195	8.0	4.0	1.0	1.2	0.06	inclusive



+ Saliger-Gruppe GmbH

a strong partnership

Vogel Germany and the Saliger-Gruppe have agreed on a far-reaching cooperation in the procurement and calibration of measuring equipment. With the new orientation, Vogel Germany is strengthening its offer of having measuring equipment tested in an independent calibration laboratory. The Saliger-Gruppe offers a cross-industry and manufacturer-independent DAkkS-accredited calibration service. In addition to factory calibrations, DAkkS calibrations can now also be offered for the almost complete range of Vogel Germany.

In order to be able to offer its customers an accelerated and simplified process flow, Vogel Germany has chosen this further route of combining calibration service with the procurement of new measuring equipment. In cooperation with the Saliger-Gruppe, the procurement of measuring equipment for the customers of the Saliger-Gruppe is taken over by Vogel Germany.


Stephan Rex, Managing Director of Vogel Germany: "We are pleased to have found a new partner in the Saliger-Gruppe. The focus of the cooperation is an improved service for all aspects of measuring equipment. This will be reflected above all by a strong simplification in the complex procurement of measuring equipment and its calibration for the customer, as this service is available from a single source now. The Saliger-Gruppe offers a variety of calibration options that Vogel Germany has not been able to offer to this extent before."

Ulrich Saliger, Managing Director of the Saliger-Gruppe: "Looking for a way to redesign our Saliger measuring equipment sales department, we are happy to have entered into close cooperation with Vogel Germany. In times of increased demands on the calibration business, our main concern is to be able to continue to offer our customers a comprehensive range of services. The cooperation with Vogel Germany enables us to concentrate on our core competencies and at the same time to expand the product portfolio for our customers."

Inquiries can now be submitted to your usual contact person or by email to info@vogel-germany.de or by telephone on +49 2832 9239-0.





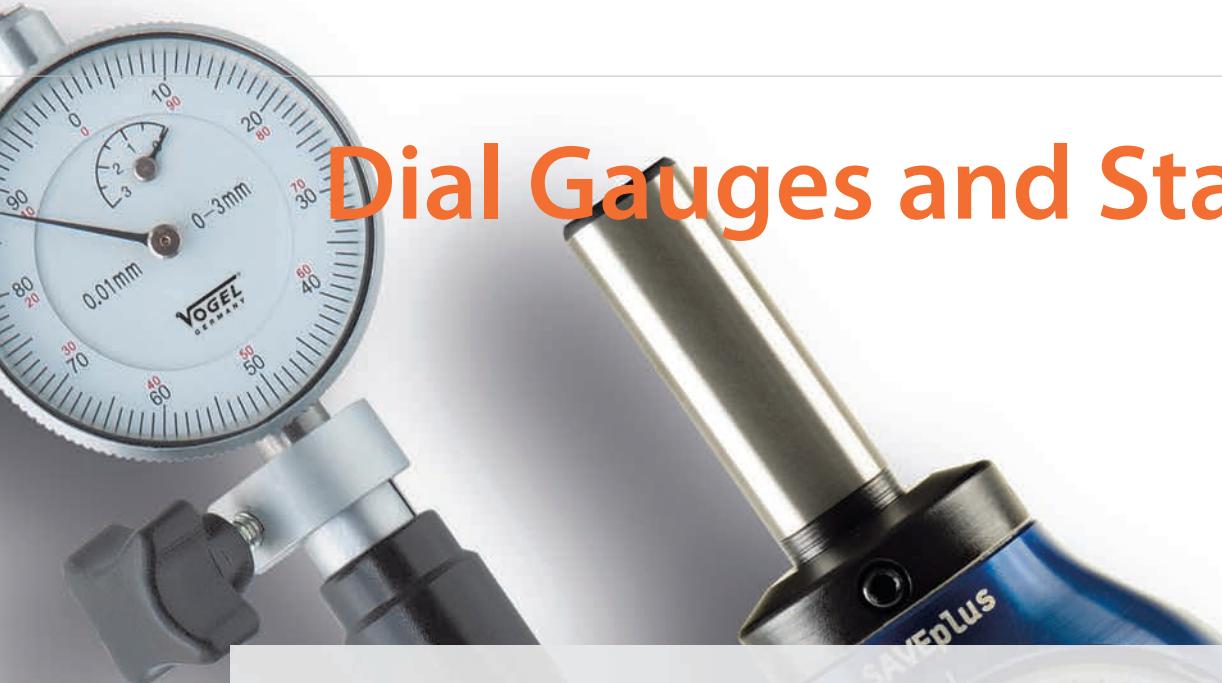

Dial Gauges and Stands

Dial Indicators, digital	151 – 157
Dial Indicators, analog	158 – 163
Dial Indicators	164
Dial Indicators, Accessories	166 – 170
Digital Dial Test Indicators • IP54	171
Crankshaft Test Instruments	171
Dial Test Indicator, analog	172
Accessories for Dial Test Indicators	173
Zero Setting Devices	174
Centering Devices	174
Edge Finders	175 – 176
3D Buttons	175
Universal Magnetic Measuring Stands	177 – 182
Magnet Feet	183
Measuring Stand Rods	184
Accessories for Measuring Stands	185
Measuring Tables	186 – 187

Image Directory • Dial Gauges and Stands

Page 151				
Page 151	Page 152	Page 152	Page 152	Page 153
Page 153	Page 154	Page 154	Page 155	Page 155
Page 156	Page 156	Page 157	Page 157	Page 157
Page 157	Page 158	Page 158	Page 159	Page 159
Page 159	Page 159	Page 159	Page 160	Page 160
Page 160	Page 160	Page 160	Page 161	Page 161

Image Directory • Dial Gauges and Stands

A standard dial gauge with a vertical stem and a circular dial.	A dial gauge with a vertical stem and a circular dial, featuring a different scale or design.	A dial gauge with a vertical stem and a circular dial, showing a different scale or design.	A dial gauge with a vertical stem and a circular dial, showing a different scale or design.	A dial gauge with a vertical stem and a circular dial, showing a different scale or design.
Page 161	Page 162	Page 162	Page 162	Page 163
A dial gauge with a horizontal stem and a circular dial.	A dial gauge with a vertical stem and a circular dial.	A dial gauge with a vertical stem and a circular dial, shown in a different orientation.	A dial gauge with a vertical stem and a circular dial, shown in a different orientation.	A dial gauge with a vertical stem and a circular dial, shown with a cable attached.
Page 163	Page 164	Page 166	Page 166	Page 166
A dial gauge with a vertical stem and a circular dial, shown in a different orientation.	Two circular base plates for a dial gauge stand.	A dial gauge mounted on a wooden base plate.	A dial gauge mounted on a three-legged stand.	A dial gauge mounted on a three-legged stand.
Page 166	Page 166	Page 167	Page 167	Page 167
A dial gauge mounted on a three-legged stand.	A dial gauge mounted on a three-legged stand.	A dial gauge mounted on a green adjustable stand.	A dial gauge mounted on a green adjustable stand.	A dial gauge mounted on a black articulated stand.
Page 167	Page 167	Page 170	Page 170	Page 170
A dial gauge probe and its mounting bracket.	A dial gauge probe and its mounting bracket.	A dial gauge probe and its mounting bracket.	A dial gauge probe and its mounting bracket.	A dial gauge probe and its mounting bracket.
Page 170	Page 170	Page 170	Page 170	Page 170
A large black dial gauge probe.	A digital dial gauge with a digital display showing "1000".	A dial gauge probe set in a carrying case.	A dial gauge probe.	A standard dial gauge with a vertical stem and a circular dial.
Page 170	Page 171	Page 171	Page 172	Page 172
A dial gauge probe.	A dial gauge probe.	A dial gauge probe.	A dial gauge probe.	A dial gauge probe.
Page 172	Page 172	Page 172	Page 173	Page 173

Image Directory • Dial Gauges and Stands

				
Page 173	Page 173	Page 173	Page 173	Page 173
				
Page 173	Page 173	Page 173	Page 173	Page 173
				
Page 173	Page 173	Page 173	Page 173	Page 173
				
Page 175	Page 175	Page 175	Page 175	Page 175
				
Page 175	Page 176	Page 176	Page 176	Page 177
				
Page 177	Page 177	Page 178	Page 178	Page 178

Image Directory • Dial Gauges and Stands

Page 179				
Page 179	Page 180	Page 180	Page 180	Page 181
Page 181	Page 181	Page 182	Page 182	Page 182
Page 183				
Page 183	Page 184	Page 184	Page 184	Page 184
Page 184				
Page 184	Page 185	Page 185	Page 185	Page 185

Image Directory • Dial Gauges and Stands

				
Page 185	Page 185	Page 185	Page 185	Page 185
				
Page 185	Page 186	Page 186	Page 186	Page 187
				
Page 187	Page 187			




Electr. Digital Dial Indicator

- standard model for industry and craft
- with data output

- aluminium housing with sturdy plastic cover
- large LCD display with clear reading, digit height 10 mm
- stem and spindle stainless, hardened and lapped
- exchangeable probe tips, M 2.5
- On/Off button, ABS and Preset function
- zero setting at any position, mm/inch switchable
- with bar display (art.-no.: 242055, 242056 and 242057)
- min./max., tol. and set function (selection and indication of tolerance limits)
- with flat backcover and backcover with lug
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Option

- data transfer via cable, art.-no.: 2420192, see page 334

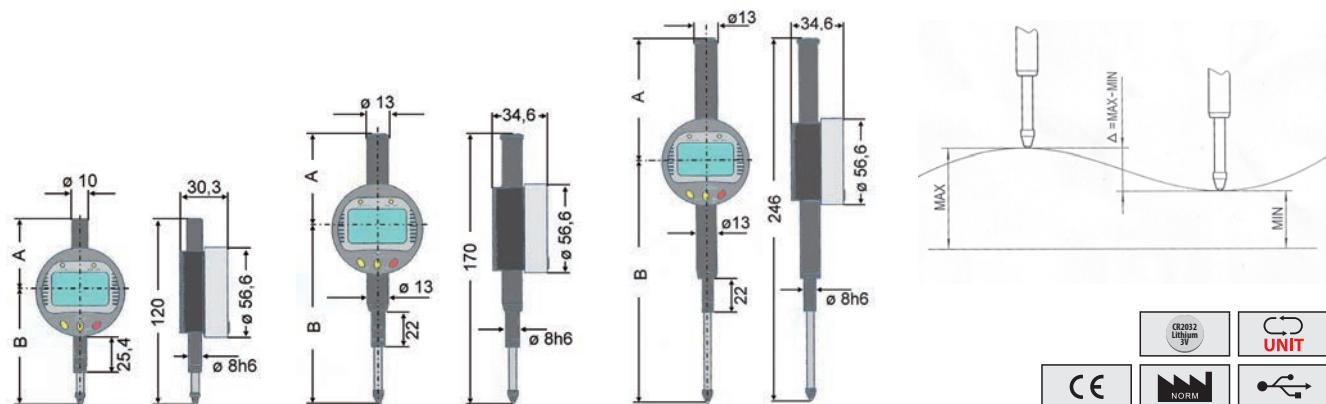

ART No.	mm / inch	mm / inch	mm	mm	measuring force N	min/max tol/set	A mm	B mm	CC
242060	0 - 12.7 / 0 - 0.5	0.01 / 0.0005	0.010	0.010	< 1.50	✓	50	75	on request
242055	0 - 12.7 / 0 - 0.5	0.001 / 0.00005	0.003	0.05	< 1.50	✓	50	75	on request
242160	0 - 12.7 / 0 - 0.5	0.001 / 0.00005	0.003	0.05	< 1.50	✓	50	75	on request
242163	0 - 25.4 / 0 - 1.0	0.01 / 0.0005	0.010	0.015	< 1.50	✓	60	120	on request
242056	0 - 25.4 / 0 - 1.0	0.001 / 0.00005	0.003	0.05	< 1.50	✓	60	110	on request
242161	0 - 25.4 / 0 - 1.0	0.001 / 0.00005	0.003	0.06	< 1.50	✓	60	110	on request
242164	0 - 50.8 / 0 - 2.0	0.01 / 0.0005	0.010	0.030	< 1.50	✓	85	155	on request
242057	0 - 50.8 / 0 - 2.0	0.001 / 0.00005	0.003	0.05	< 1.50	✓	90	160	on request
242162	0 - 50.8 / 0 - 2.0	0.001 / 0.00005	0.03	0.08	< 1.50	✓	85	155	on request

Precision Digital Dial Indicators

„Absolute“ Electr. Digital Dial Indicator • IP65

- top model for industry purposes
- with optical tolerance alarm by LED signal
- with Bluetooth® data output
- spray water proof, acc. to 40050 / IEC 60529

- mechanical parts in stainless steel, hardened, IP51 protected
- housing IP54 protected, front plate made of plastic
- large LCD display with clear reading, 10 mm digit height
- On/Off button, LED signal for data transmitting and tolerance range
- with PRESET/ORIGIN/ABS/INC-system
- mm/inch switchable, from up 25 mm with lifting device
- incl. 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Options

- data transfer via cable, art.-no.: 3420195, see page 334
- data transfer via WiFi, art.-no.: 2040102, see page 334
- data transfer via Bluetooth®, art.-no.: 2023106, see page 334


ART NO 240282






ART NO 240281



ART NO 240280

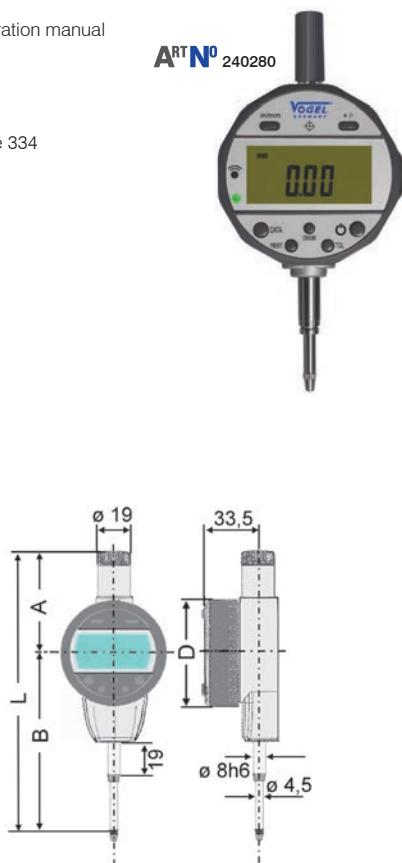

from up 25 mm
incl. lifting device

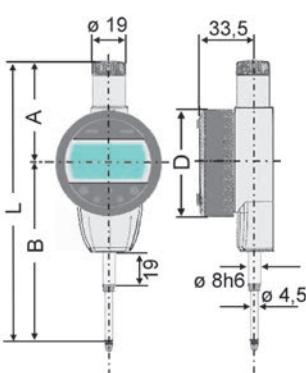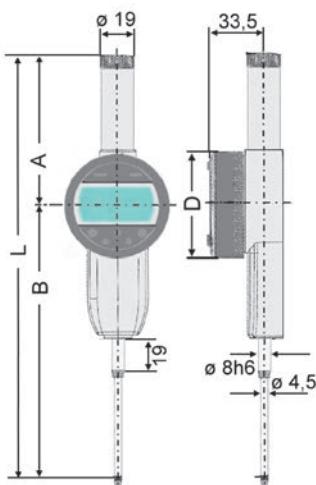

Bluetooth	ABSOLUTE
	ORIGIN

CR2032
Lithium 3V

NORM

CE

ART NO	mm / inch	mm / inch	mm	mm	L mm	A mm	B mm	D mm	CC
240280	12.5 / 0.5	0.01 / 0.0005	0.002	0.01	129.2	60.2	69.0	60.1	on request
240285	12.5 / 0.5	0.001 / 0.00005	0.002	0.004	129.2	60.2	69.0	60.1	on request
240281	25.0 / 1.0	0.01 / 0.0005	0.002	0.01	159.2	57.7	101.5	60.1	on request
240286	25.0 / 1.0	0.001 / 0.00005	0.002	0.004	159.2	57.7	101.5	60.1	on request
240282	50.0 / 2.0	0.01 / 0.0005	0.002	0.015	236.2	83.7	152.5	60.1	on request
240287	50.0 / 2.0	0.001 / 0.00005	0.002	0.005	236.2	83.7	152.5	60.1	on request

Precision Digital Dial Indicators


„Absolute“ Electr. Digital Dial Indicator • IP54

- top model for industry purposes
- with optical tolerance alarm
- with data output
- spray water proof, acc. to 40050 / IEC 60529
- mechanical parts in stainless steel, hardened, IP51 protected
- housing IP54 protected, front plate made of plastic
- large LCD display with clear reading, 10 mm digit height
- On/Off button, with tolerance presetting and display for tolerance range
- ORIGIN/ABS/INC-system
- mm/inch switchable
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Option

- data transfer via cable, art.-no.: 2420192, see page 334

NEW

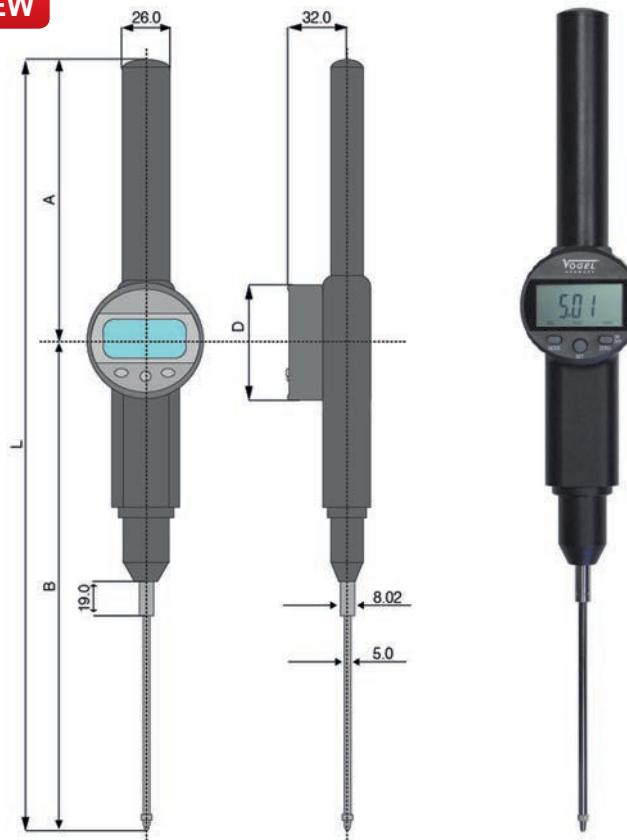

ART NO	mm / inch	mm / inch	mm	mm	L mm	A mm	B mm	D mm	CC
240270	100 / 4.0	0.01 / 0.0005	0.002	0.01	405.0	150.0	255.0	50.0	on request

Electr. Digital Small Dial Indicator • IP40


NEW

with data output

- mechanical parts in stainless steel, hardened
- housing made of aluminium, front plate made of plastic
- LCD display with clear reading, digit height 8 mm
- On/Off button, ABS/INC measurement system
- mm/inch switchable, +/- pre-select value, PRESET
- switchable measuring direction
- incl. 1x 3 V battery (type CR1632, art.-no.: 90101), incl. operation manual

Option

- data transfer via cable, art.-no.: 2420192, see page 334

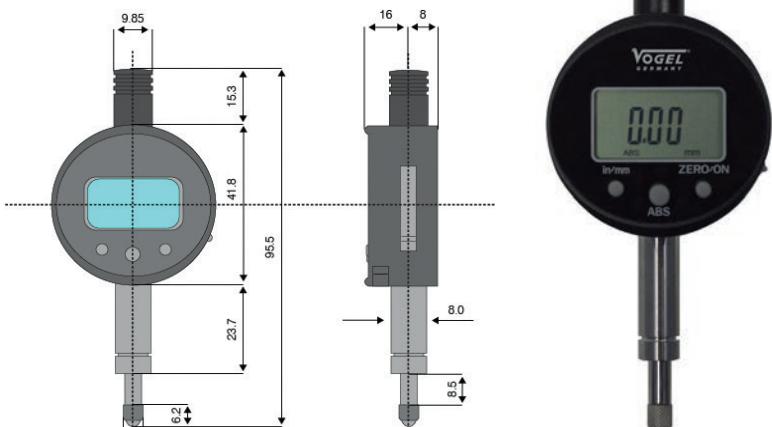

ART NO	mm / inch	mm / inch	mm	mm	CC
240235	5.0 / 0.2	0.01 / 0.0005	0.02	0.01	on request

Precision Digital Dial Indicators

Sylvac • Electr. Digital Indicators S_Dial Work, Advanced • IP54

NEW

ART No 240266


- with proximity data output

- robust structure
- water and coolant resistant
- aluminium case, rotating display over 270°
- LCD display with clear reading, with integrated LEDs tolerances, 10 mm digit height
- automatic wake-up and sleeping mode, (absolute system S.I.S)
- broad choice (MIN / MAX / DELTA, TOL, facror, PRESET, AUTO, OFF etc.)
- data output via cable Proximity to USB oder RS232
- mm/inch switchable, measuring direction reversible
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Options

- data output via cable, Proximity – USB, art.-no.: 2023101, see page 334
- data output via cable, Power- USB, external power, art.-no.: 2424101, see page 334

ART No 240242

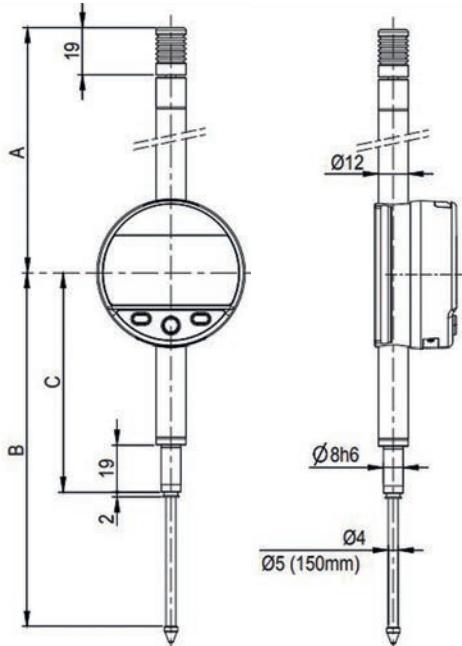

ART No	mm / inch	mm / inch	mm	mm	A mm	B mm	C mm	D mm	CC
240242	12.5 / 0.5	0.01 / 0.0005	0.002	0.010	56.7	66.1	50.5	36.6	on request
240262	12.5 / 0.5	0.001 / 0.00005	0.002	0.003	56.7	66.1	50.5	36.6	on request
240243	25.0 / 1.0	0.01 / 0.0005	0.002	0.010	69.4	78.5	50.5	49.4	on request
240263	25.0 / 1.0	0.001 / 0.00005	0.002	0.004	69.4	78.5	50.5	49.4	on request
240244	50.0 / 2.0	0.01 / 0.0005	0.002	0.020	121.0	142.0	88.0	—	on request
240264	50.0 / 2.0	0.001 / 0.00005	0.002	0.005	121.0	142.0	88.0	—	on request
240245	100.0 / 4.0	0.01 / 0.0005	0.002	0.020	172.0	244.0	139.0	—	on request
240265	100.0 / 4.0	0.001 / 0.00005	0.002	0.006	172.0	244.0	139.0	—	on request
240246	150.0 / 6.0	0.01 / 0.0005	0.002	0.020	224.0	349.0	193.0	—	on request
240266	150.0 / 6.0	0.001 / 0.00005	0.002	0.010	224.0	349.0	193.0	—	on request

Precision Digital Dial Indicators

Sylvac • Electr. Digital Indicators S_Dial Work, Advanced • IP67

NEW

ART No 240292

- with proximity data output

- robust structure
- water and coolant resistant, protection class IP67 acc. to IEC 60529
- aluminum case, rotating display over 270°
- LCD display with clear reading, with integrated LEDs tolerances, 10 mm digit height
- automatic wake-up and sleeping mode (Absolute System S.I.S.)
- broad choice of functions (MIN / MAX / DELTA, TOL, factor, PRESET, AUTO, OFF etc.)
- data output via cable Proximity to USB or RS232
- mm/inch switchable, measuring direction reversible
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operating manual


Options

- data output via cable, Proximity – USB, art.-no.: 2023101, see page 334
- data output via cable, Power – USB, external power, art.-no.: 2424101, see page 334

ART No 240290



Data cables for digital measuring instruments you will find on page 334

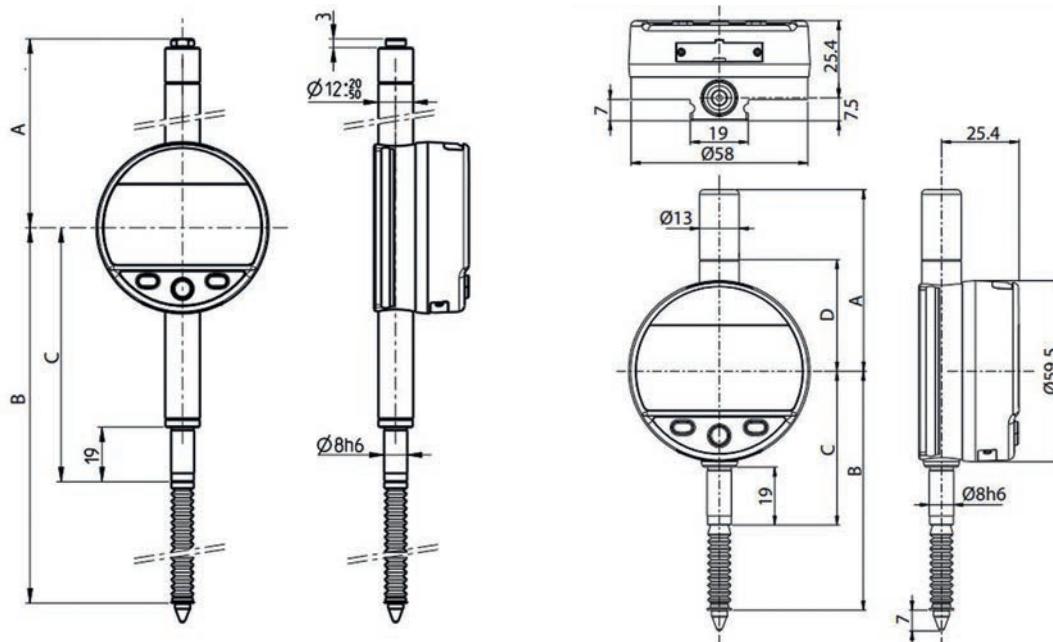

ART No	mm / inch	mm / inch	mm	mm	A mm	B mm	C mm	D mm	CC
240290	12.5 / 0.5	0.001 / 0.00005	0.002	0.003	59.6	78.4	50.5	36.3	on request
240291	25.0 / 1.0	0.001 / 0.00005	0.002	0.004	85.4	99.7	50.5	49.4	on request
240292	50.0 / 2.0	0.001 / 0.00005	0.002	0.005	104.4	175.3	88.0	—	on request

Precision Digital Dial Indicators

Sylvac • Electr. Digital Indicators S_Dial Work, Advanced • IP54

NEW

ART No 240297






- with integrated Bluetooth® technology

- robust structure
- aluminium case, rotating display over 270°
- LCD display with clear reading, with integrated LEDs tolerance LEDs, 10 mm digit height
- automatic wake-up and sleeping mode (Absolute System S.I.S)
- broad choice of functions (MIN / MAX / DELTA, TOL, factor, PRESET, AUTO, OFF etc.)
- data output via Bluetooth® or cable Proximity to USB or RS232
- mm/inch switchable, measuring direction reversible
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Options

- data output via cable, Proximity – USB, art.-no. 2023101, see page 334
- data output via cable, Power – USB, external power, art.-no.: 2424101, see page 334
- data output via Bluetooth®, art.-no.: 2023106S, see page 334

ART No 240295

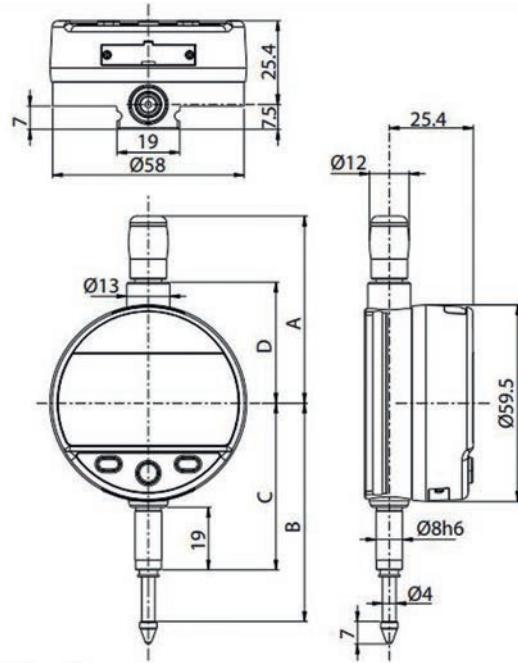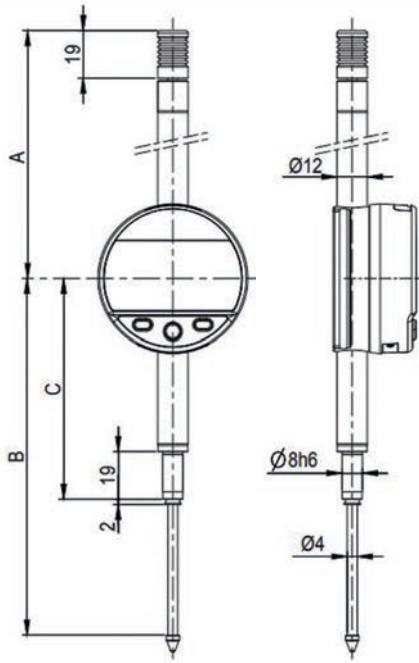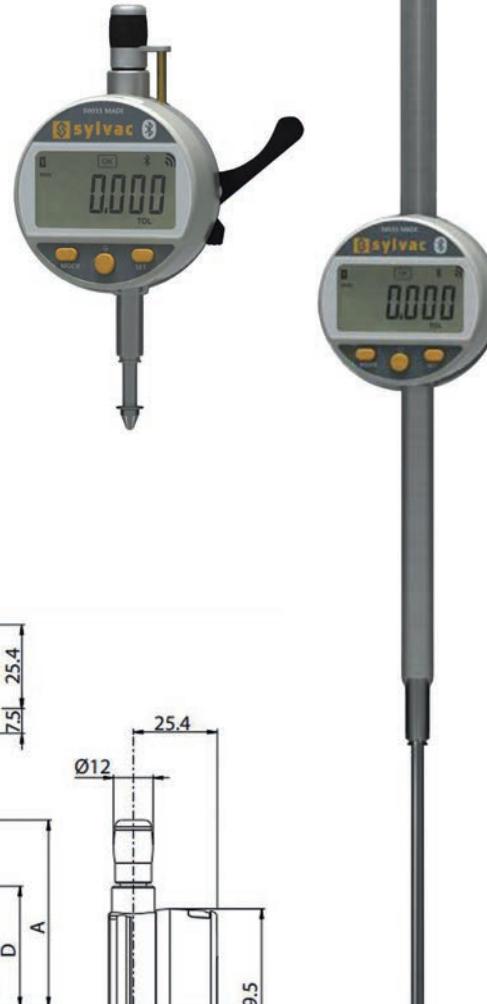

ART No	mm / inch	mm / inch	mm	mm 1 Digit	A mm	B mm	C mm	D mm	CC
240295	12.5 / 0.5	0.001 / 0.00005	0.002	0.003	56.7	66.1	50.5	36.3	on request
240296	25.0 / 1.0	0.001 / 0.00005	0.002	0.004	69.4	78.5	50.5	49.4	on request
240297	50.0 / 2.0	0.001 / 0.00005	0.002	0.005	121.0	142.0	88	—	on request
240298	100.0 / 4.0	0.001 / 0.00005	0.002	0.006	172.0	244.0	139	—	on request

Precision Digital Dial Indicators

Sylvac • Electr. Digital Small Dial Indicators

NEW

- dial indicators „type P“ water and coolant proof acc. to DIN 40050 / IEC 60529 (IP67)
- with Sylvac electronic
- with data output RS232 „Power“
- with integrated Bluetooth® technology

- mechanical parts in stainless steel, hardened
- housing and front plate made of polyamide
- LCD display with clear reading, digit height 6 mm
- autom. On/Off switching, zero setting at any position
- hold function, absolute and relative mode, pre-select value
- mm/inch switchable, reversal of the measuring device
- with dovetail guide at the back
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Options

- data output via cable, Proximity – USB, art.-no. 2023101, see page 334
- data output via cable, Power – USB, external power, art.-no.: 2424101, see page 334
- data output via Bluetooth®, art.-no.: 2023106S, see page 334

ART No 240231





ART No 240230



type S

type P
(IP67)

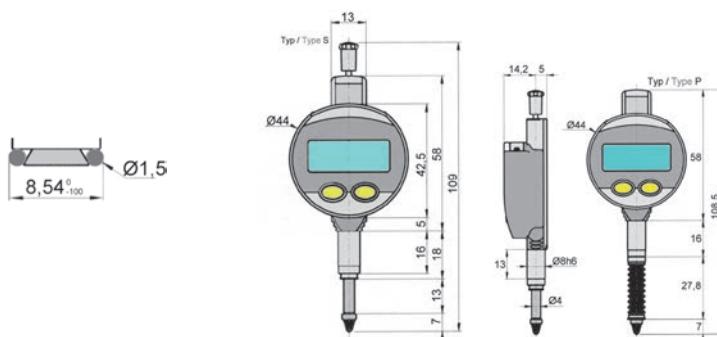

ART No	mm / inch	mm / inch	mm	mm 1) 1 Digit	type P protected	type S standard	measuring force N	CC
240230	0 – 12.7 / 0 – 0.5	0.01 / 0.0005	0.002	1) 0.010	✓	—	0.60 – 1.30	on request
240231	0 – 12.7 / 0 – 0.5	0.01 / 0.0005	0.002	1) 0.010	—	✓	0.50 – 0.90	on request
240232	0 – 12.7 / 0 – 0.5	0.001 / 0.00005	0.002	0.004	✓	—	0.60 – 1.30	on request
240233	0 – 12.7 / 0 – 0.5	0.001 / 0.00005	0.002	0.004	—	✓	0.50 – 0.90	on request

Electr. Digital Dial Indicators • IP65

- water and coolant proof acc. to DIN 40050 / IEC 60529
- with mini USB data output



- mechanical parts in stainless steel, hardened
- housing made of aluminium, front plate made of plastic
- LCD display with clear reading, digit height 11mm
- On/Off button, ABS/INC measurement system
- zero setting at any position, ± pre-select value, PRESET
- mm/inch switchable
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Options

- spare rubber sleeve (art.-no.: 249915)
- data transfer via cable for art.-no.: 242140, art.-no.: 2420192, see page 334

ART No 242140

ART No 242150

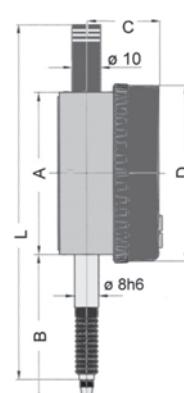


ART No	mm / inch	mm / inch	mm	mm 1) 1 Digit	A mm	B mm	C mm	D mm	L mm	CC
242140	12.5 / 0.5	0.01 / 0.0005	0.02	1) 0.010	59	65	30	59.5	145	on request
242150	12.5 / 0.5	0.001 / 0.00005	0.004	0.003	59	65	30	59.5	145	on request

Precision Dial Indicators

Small Dial Indicators

workshop grade

- standard quality
- e.g. for workshop use
- metal housing, matt chrome finish
- spindle and stem stainless and hardened
- with turnable scale by outer ring, for easy zero setting

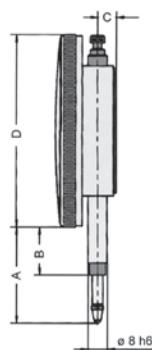


ART No	mm	mm	yes no	mm	A	B	C	D-Ø	CC	
					mm	mm	mm	mm		
241001	0 - 3	0.01	—	X	0.5	28	14	8.2	45	on request
241002	0 - 5	0.01	—	X	0.5	28	14	8.2	45	on request

Käfer • Small Dial Indicators

DIN 878 / workshop grade

- sturdy design, for workshop use and calibration purposes

- solid brass housing, matt chrome finish
- spindle and stem stainless, hardened and lapped
- adjustable tolerance fingers
- from up 0.001 mm reading in workshop grade
- with turnable scale by outer ring, for easy zero setting



DIN

ART No	mm	mm	yes no	mm	A	B	C	D-Ø	CC	
					mm	mm	mm	mm		
240001	0 - 3	0.01	—	X	0.5	28.5	14	7.3	40	on request
240002	0 - 5	0.01	—	X	0.5	28.5	14	7.3	40	on request
240003	0 - 1	0.001	—	X	0.2	28.5	14	7.3	40	on request
240121	0 - 3	0.01	✓	—	0.5	28.5	14	7.3	40	on request
240122	0 - 5	0.01	✓	—	0.5	28.5	14	7.3	40	on request
240123	0 - 1	0.001	✓	—	0.2	28.5	14	7.3	40	on request

Explore our
Website.

www.vogel-germany.de



VOGEL
GERMANY
Measuring Solutions

Any questions?


We are pleased to advise.

Dial Indicators

workshop grade

- standard quality
- e.g. for workshop use

- solid brass housing, matt chrome finish, adjustable tolerance fingers
- spindle and stem stainless steel and hardened
- with turnable scale by outer ring, for easy zero setting




ART No	mm	mm			mm	A mm	B mm	C mm	D-Ø mm	CC
			yes	no						
241101	0 - 10	0.01	—	X	1	43.0	22.0	8.2	57	on request
241103	0 - 1	0.001	—	X	0.2	33.5	22.0	8.0	57	on request
241131	0 - 10	0.01	✓	—	1	43.0	22.0	8.2	57	on request

Dial Indicators

DIN 878

- top quality, for the workshop and inspection room

- metal housing, matt chrome finish
- spindle and stem stainless steel and hardened
- adjustable tolerance fingers
- with flat backcover and backcover with lug
- with turnable scale by outer ring, for easy zero setting




ART No	mm	mm			mm	A mm	B mm	C mm	D-Ø mm	CC
			yes	no						
241118	0 - 10	0.01	—	X	1	40	19.5	8	60	on request
241119	0 - 10	0.01	✓	—	1	40	19.5	8	60	on request

Käfer • Dial Indicators

DIN 878

- sturdy design, for workshop use and calibration purposes

- solid brass housing, matt chrome finish
- stem and spindle stainless steel, hardened and lapped
- adjustable tolerance fingers, from 0.001 mm with factory accuracy
- with turnable scale by outer ring, for easy zero setting



ART No	mm	mm			mm	A mm	B mm	C mm	D-Ø mm	CC
			yes	no						
240101	0 - 10	0.01	—	X	1.0	40	18.5	7.5	58	on request
240103	0 - 1	0.001	—	X	0.2	40	18.5	7.5	58	on request
240106	0 - 5	0.001	—	X	0.2	40	18.5	7.5	58	on request
240131	0 - 10	0.01	✓	—	1.0	40	18.5	7.5	58	on request
240133	0 - 1	0.001	✓	—	0.2	40	18.5	7.5	58	on request


Precision Dial Indicators

Accessories for Dial Indicators
can be found on page 168 – 169

Käfer • Dial Indicators

DIN 878

- with comparator measuring
- for very accurate comparative measurements
- contrary to tooth wheel system, the spindle travel is expanded by a lever, due to the lever transmission the hysteresis can be kept very small
- solid brass housing, matt chrome finish
- stem and spindle stainless, hardened and lapped
- adjustable tolerance fingers
- with turnable scale by outer ring, for easy zero setting



ART No 240004

ART No 240005




DIN

ART No	mm	mm	yes	no		mm	A mm	B mm	C mm	D-ø mm	
240004	0 – 1.0	0.001	✓	—		0.1	28	14.0	7.5	40	on request
240005	0 – 1.0	0.001	✓	—		0.1	40	18.5	8.5	58	on request
240006	0 – 0.08	0.001	✓	—		—	28	14.0	7.5	40	on request
240007	0 – 0.08	0.001	✓	—		—	40	18.5	8.5	58	on request
240008	0 – 1.0	0.002	✓	—		0.1	28	14.0	7.5	40	on request
240009	0 – 1.0	0.002	✓	—		0.1	40	18.5	8.5	58	on request

Dial Indicator

high workshop grade

- for large measuring ranges
- concentric millimeter scale
- metal housing, matt chrome finish, adjustable tolerance fingers
- stem and spindle stainless and hardened
- with turnable scale by outer ring, for easy zero setting
- with flat backcover and backcover with lug
- incl. calibration certificate

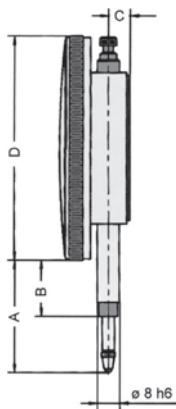


NORM

ART No	mm	mm	yes	no		mm	A mm	B mm	C mm	D-ø mm	
241121	0 – 30	0.01	—	✗		1	60	22.5	8	60	on request

Käfer • Dial Indicators

DIN 878 / workshop grade

- with left turning pointer,
for depth measurement with measuring bridge
- solid brass housing, matt chrome finish
- stem and spindle stainless, hardened and lapped
- adjustable tolerance fingers
- with turnable scale by outer ring, for easy zero setting
- art.-no. 240108 in workshop grade only



ART No 240107

ART No 240108




DIN

ART No	mm	mm	yes	no		mm	A mm	B mm	C mm	D-ø mm	
240107	0 – 10	0.01	—	✗		1	40	18.5	7.5	58	on request
240108	0 – 30	0.01	—	✗		1	60	18.5	7.5	58	on request

Käfer • Dial Indicators

- instead of a revolution counter, this dial indicator has a linear scale
- the stem is fitted 3.5 mm out of the middle

- solid brass housing, matt chrome finish
- stem and spindle stainless, hardened and lapped
- without adjustable tolerance fingers
- with turnable scale by outer ring, for easy zero setting

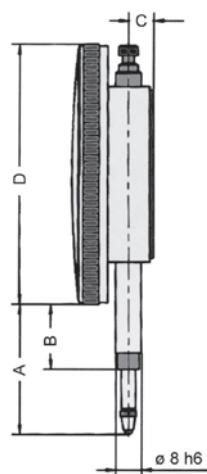


ART No	mm	mm	yes	no	mm	A	B	C	D-Ø	CC
						mm	mm	mm	mm	
240030	0 – 30	0.1	—	X	10	60.0	18.5	7.5	58	on request
240031	0 – 50	0.1	—	X	10	97.5	18.5	7.5	58	on request

Käfer • Dial Indicators

- with concentric millimeter scale

- solid brass housing, matt chrome finish
- stem and spindle stainless, hardened and lapped
- adjustable tolerance fingers
- with turnable scale by outer ring, for easy zero setting

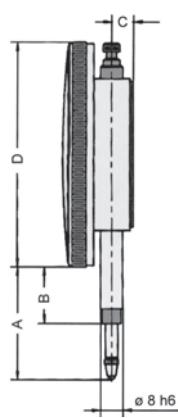

ART No 240134



ART No	mm	mm	yes	no	mm	A	B	C	D-Ø	CC
						mm	mm	mm	mm	
240102	0 – 30	0.01	—	X	1	60.0	18.5	7.5	58	on request
240104	0 – 50	0.01	—	X	1	97.5	36.5	7.5	58	on request
240105	0 – 100	0.01	—	X	1	178.0	65.5	8.5	80	on request
240110	0 – 100	0.01	—	X	1	147.5	56.5	7.5	58	on request
240111	0 – 10	0.01	—	X	1	40.0	18.5	7.5	58	on request
240132	0 – 30	0.01	✓	—	1	60.0	18.5	7.5	58	on request
240134	0 – 50	0.01	✓	—	1	97.5	36.5	7.5	58	on request
240135	0 – 80	0.01	✓	—	1	147.5	56.5	7.5	58	on request


Precision Dial Indicators

Dial Indicator • IP54

DIN 878

- splash water resistant acc. to DIN 40050 / IEC 60529

- metal housing, matt chrome finish
- stem and spindle stainless and hardened, with rubber sleeve
- with turnable scale by outer ring, for easy zero setting

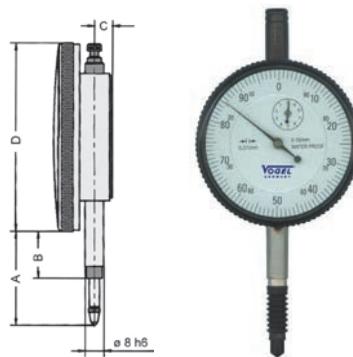

IP 54 **DIN**


ART No	— mm	mm	yes		mm	A mm	B mm	C mm	D-ø mm	
			yes	no						
241142	0 – 10	0.01	—	X	1	46	20	8	55.5	on request

Käfer • Dial Indicators • IP53

DIN 878

- drip water proof acc. to DIN 40050 / IEC 60529

- solid brass housing, matt chrome finish, stem with rubber sleeve
- stem and spindle stainless, hardened and lapped
- adjustable tolerance fingers, shadowfree flat glass, perfect sealed by O-rings
- with turnable scale by outer ring, for easy zero setting
- version 0.001 mm reading is acc. to workshop grade

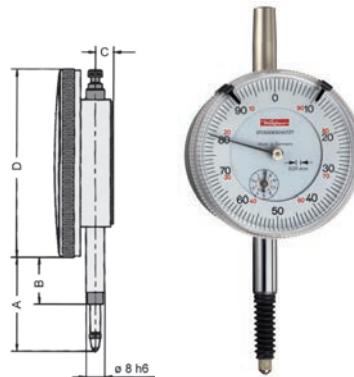

IP 53 **DIN**


ART No	— mm	mm	yes		mm	A mm	B mm	C mm	D-ø mm	
			yes	no						
240141	0 – 10	0.01		—	1.0	47	18.5	8	58	on request
240142	0 – 3	0.01		—	0.5	33	11.6	8	41	on request
240143	0 – 1	0.001		—	0.2	47	18.5	8	58	on request
240144	0 – 1	0.001		—	0.2	33	11.6	8	41	on request

Käfer • Dial Indicators • IP67

DIN 878

- water-, coolant and oil tight acc. to DIN 40050 / IEC 60529

- solid brass housing, matt chrome finish, stem with rubber sleeve
- stem and spindle stainless, hardened and lapped
- adjustable tolerance fingers, shadowfree flat glass, perfect sealed by O-rings
- with turnable scale by outer ring, for easy zero setting
- version with 0.001 mm and 0.002 mm reading are acc. to workshop grade

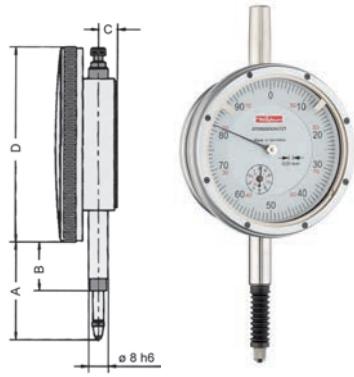

IP 67 **DIN**


ART No	— mm	mm	yes		mm	A mm	B mm	C mm	D-ø mm	
			yes	no						
240151	0 – 10	0.01		—	1.0	45.5	16.7	9.3	61.5	on request
240152	0 – 3	0.01		—	0.5	33.0	11.6	9.3	44.5	on request
240153	0 – 1	0.001		—	0.2	45.5	16.7	9.3	61.5	on request
240154	0 – 1	0.002		—	0.2	33.0	11.6	9.3	44.5	on request

Käfer • Dial Indicators

DIN 878

- with magnetic backside

- solid brass housing, matt chrome finish
- stem and spindle stainless, hardened and lapped
- adjustable tolerance fingers
- with turnable scale by outer ring, for easy zero setting

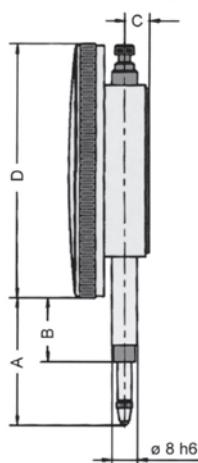


ART NO	mm	mm	yes no	A mm	B mm	C mm	D-Ø mm	CC
240001-1	0 – 3	0.01	— X	28	14.0	25	40	on request
240101-1	0 – 10	0.01	— X	40	18.5	25	58	on request
240121-1	0 – 3	0.01	✓ —	28	14.0	25	40	on request
240131-1	0 – 10	0.01	✓ —	40	18.5	25	58	on request

Käfer • Dial Indicators

- with probe in the center of the back plate
- especially for measuring in appliances and tool engineering

- solid brass housing, matt chrome finish
- stem and spindle stainless, hardened and lapped
- adjustable tolerance fingers
- with turnable scale by outer ring, for easy zero setting

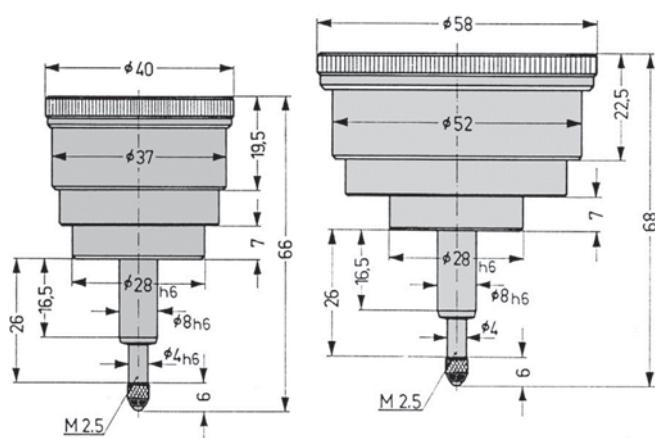

ART NO	mm	mm	mm	number of pointers	housing-Ø mm	CC
240020	0 – 3	0.01	1.0	2	58	on request
240021	0 – 5	0.01	1.0	2	58	on request
240023	0 – 3	0.01	0.5	2	40	on request
240024	0 – 5	0.01	0.5	2	40	on request

Precision Comparator Gauges


Käfer • Comparator Gauges

DIN 879

- designed to check parallelism, smoothness and through running
- sturdy housing with stable plastic cover
- stem and spindle stainless, hardened and finely lapped
- shockproof version, stem-Ø 8 h6
- adjustable tolerance fingers
- exchangeable contact points, M 2.5

Option

- spindle lifting cable (art.-no.: 249996)

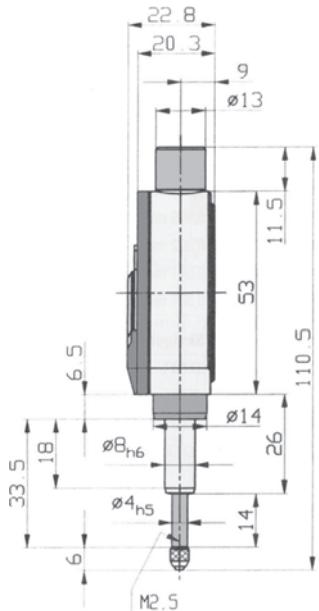

DIN

ART N°	mm	range mm	free lift mm	housing-Ø mm	CC
240800	±0.25	0.01	0.5	2.5	62
240803	±0.05	0.001	0.1	3.0	on request

Follow us on Facebook.

Never miss any news about our products, promotions and offers.



Any questions?
We are pleased to advise.

facebook.com/VogelGermany

Why actually Vogel Germany?

Besides a wide range of products which offer the right solution for every application, Vogel Germany is a service oriented company that is also powerful in consulting, training and logistics.

For further information on Vogel Germany please visit:

www.vogel-germany.de



Vogel Germany

- ✓ offers best customer service
- ✓ belongs to the strong Fervi Group
- ✓ offers quality Made in Germany

Accessories for Dial Indicators


Spindle Lifting Lever

- for our analogous and digital dial indicator
- please choose the suitable lever control according to the art.-no. of our dial indicators




ART No 249997	ART No 249997	ART No 249998	ART No 240998
Dial Indicator	Dial Indicator	Dial Indicator	Dial Indicator
240280 – 240287	240250 + 240255	241001 + 241002	240001 – 240003
—	—	241114 – 241116	240121 – 240123
—	—	—	240001-1 + 240121-1

ART No 249992	ART No 2409208	ART No 2409209	ART No 240992
Dial Indicator	Dial Indicator	Dial Indicator	Dial Indicator
241101 – 241103	240230 + 240232	240231 + 240233	240101 – 240103
241118 + 241119	—	—	240106 – 240108
241121 + 241131	—	—	240111 + 240131-1
241136 + 241137	—	—	—



Lifting Device

- for our analogous and digital dial indicators
- choose according to our dial indicator art. no. the right lifting device

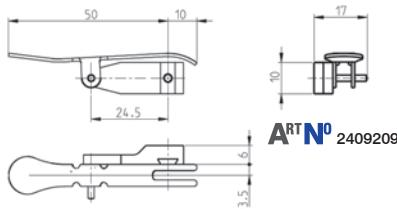

ART No 2409210	ART No 249994	ART No 249996	ART No 2409209
Dial Indicator	Dial Indicator	Dial Indicator	Dial Indicator
240230 + 240232	240251 + 240252	240800 + 240803	240231
—	240256 + 240257	241804	240233

Backside Cover

- flat or with lug
- for our analogous and digital dial indicator
- please choose the suitable backside cover according to the art.-no. of our dial indicator




ART No with lug	ART No flat	suitable for dial indicator
240980	240981	240005 • 240007 • 240009 • 240030 • 240031 240101 • 240102 • 240103 • 240104 • 240106 240107 • 240111 • 240131 • 240132 • 240133 240134 • 240135 • 240141 • 240143 • 240151 240153 • 240800 • 240803 • 240810 • 240813
240982	240983	240001 • 240002 • 240003 • 240004 • 240006 240008 • 240121 • 240122 • 240123 • 240142 240144 • 240152 • 240154
240984	240989	241118 • 241119 • 241121 • 241134 241136 • 241137 • 241142
240987	240988	240230 • 240231 • 240232 • 240233

ART No with lug	ART No flat	suitable for dial indicator
249900	249901	241101 241102 241103 241131
249902	249903	241001 241002
249908	249909	241143
249990	249991	241114 • 241115 • 241116
249910	249911	242055 • 242056 • 242057 242060 • 242061 • 242062 242063 • 242160 • 242162 242163 • 242164 • 242140 242150 • 240250 • 240255

Accessories for Dial Indicators

Extensions

- for analogous and electr. digital dial indicators

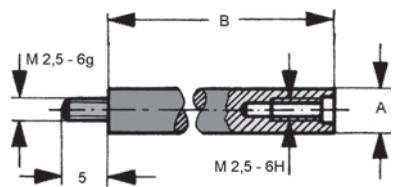

ART No	length B mm	Ø A mm
24095010	10	4
24095020	20	4
24095030	30	4
24095040	40	4
24095050	50	4
24095060	60	4
24095070	70	4
24095080	80	4
24095090	90	4
240950100	100	4

ART No	length B mm	Ø A mm
24095110	10	5
24095120	20	5
24095130	30	5
24095140	40	5
24095150	50	5
24095160	60	5
24095170	70	5
24095180	80	5
24095190	90	5
240951100	100	5

Measuring Bridge for Depth Measurements


- with extensions rods, as set
- suitable for all analogous or digital dial indicators
- measuring bridge made of steel, hardened, chromed
- stainless steel extensions, with M2.5 inside/outside thread



ART No	size of measuring bridge mm	sizes of extension rods mm
240525	80 (art.-no.: 240511)	10 / 20 / 30 / 40 / 50 / 60 / 70 / 80 / 90

Measuring Bridge for Depth Measurements

- with prismatic base
- suitable for all analogous or digital dial indicators
- for measuring the depth of keyways in cylindrical shafts, etc.
- made of steel, hardened, matt chrome finish
- measuring surface lapped
- bore-ø 8 H7

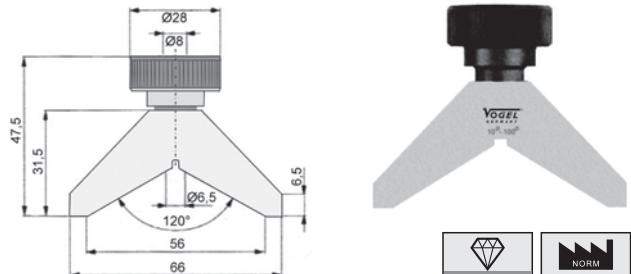

ART No	length of bridge mm	for shafts-ø mm	width mm
240520	66 x 16	10 – 100	16

Measuring Bridge for Depth Measurements

- suitable for all analogous or electr. digital dial indicators
- made of steel, hardened, matt chrome finish or black burnished
- measuring surface lapped, bore-ø 8 H7



ART No burnished	ART No chromed	length of bridge mm	width mm
240500	240510	50	16
240501	240511	80	16
240504	240514	100	16
240502	240512	120	20
240503	240513	150	20

Accessories for Dial Indicators

Contact Points

- for analogous and electr. digital dial indicators


ART No Steel 240952	ART No Steel 240953	ART No Steel 240954	ART No Steel 240955
	ART No Carbide 2409531	ART No Carbide 2409541	ART No Carbide 2409551
ART No Steel 240956	ART No Steel 240957	ART No Steel 240958	ART No Steel 240959
ART No Carbide 2409561		ART No Carbide 2409581	ART No Carbide 2409591
		ART No Ruby 2409582	ART No Ruby 2409592
ART No Steel 240960	ART No Steel 240961	ART No Steel 240962	ART No Steel 240963
		ART No Carbide 2409621	ART No Carbide 2409631

Accessories for Dial Indicators

ART NO Steel	ART NO Steel	ART NO Steel	ART NO Steel
240964	240965	240966	240967
ART NO Carbide			
2409641			
<p>4.5 M25-6g 10 45°</p>	<p>3/32" 4.5 M25-6g 6 45°</p>	<p>2 M25-6g 10 45°</p>	<p>1/8" 4.5 M25-6g 6 45°</p>
ART NO Carbide	ART NO Ruby	Carbide	Ruby
2409671	2409672		
<p>1/8" 4.5 M25-6g 6 45°</p>	<p>1/8" 4.5 M25-6g 6 45°</p>	<p>4.8 M25-6g 6 45°</p>	<p>4.5 M25-6g 6 45°</p>

Explore our **Website.**

www.vogel-germany.de

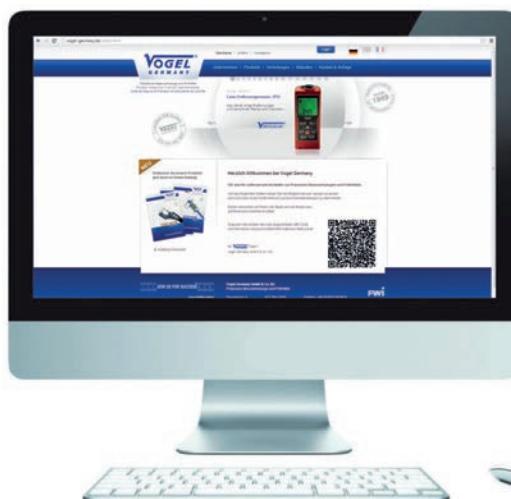

Any questions?

We are pleased to advise.

Accessories for Dial Indicators

Inside Test Indicators

- without dial indicator
- designed to check small bore holes
- sturdy version, hammer blow lacquered
- suitable for all analogous and digital dial indicators
- bore-Ø 8 H7, shaft-Ø 8 h6



Angle Test Indicators


- without dial indicator
- to control small bores on lathes and various tool machines
- sturdy version, hammer blow lacquered
- suitable for all analogous and digital dial indicators
- bore-Ø 8 H7, shaft-Ø 8 h6

ART No	measuring depth mm	smallest bore to be measured Ø mm
240646	60	6
240647	30	6

Centering Holders

- allows large cylinder diameters or holes to be centered
- suitable for all dial indicators and for dovetail guide
- made of steel, black burnished


ART No	for bore-Ø mm	shaft-Ø mm	for dove tail guide
240997	4 + 8	8	✓



Clamp Holders

- suitable for all dial indicators and for dovetail guide
- made of steel, black burnished

ART No	mm	for bore-Ø mm	for dovetail guide
249993	72 x 12 x 6	4 + 8	✓
249924	72 x 12 x 6	6 + 8	✓
249920	Ø 6 x 70	—	✓
249921	Ø 8 x 70	—	✓
249922	76 x 9 x 9	6 + 8	✓
249923	76 x 9 x 9	4 + 8	✓

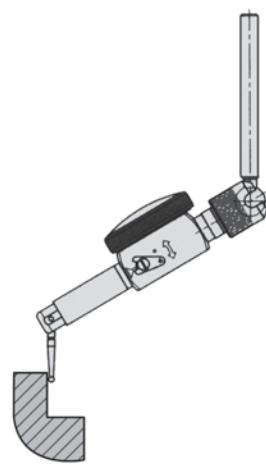

Clamping Shaft

- made of steel, black burnished or stainless steel, polished



ART No	shaft-Ø mm
240995	4 h6
240995-1	6 h6
240995-2	4 h6

ART No	shaft-Ø mm
240996	8 h6
240996-1	8 h6
—	—

Digital Test Indicators, Crankshaft Testing Instruments

Electr. Digital Test Indicator • IP54

NEW

- with data transfer via cable

- mechanical parts in stainless steel, hardened
- aluminium housing, front panel made of polyamide
- LCD display with clear reading, digit height 10 mm, more than 360° moveable
- autom. power off
- mm/inch switchable, selection of measuring direction
- housing with 3 dovetail guides
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112)
- incl. operation manual


Option

- data transfer via cable, art.-no.: 3420195, see page 334

Accessories for our test indicators can be found on page 173



with digital and graph bar

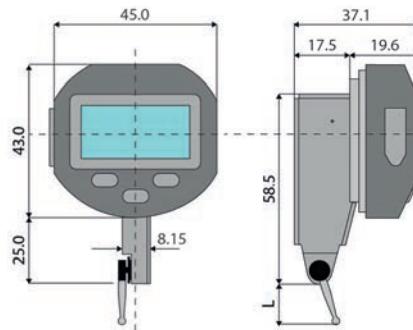


ART NO	mm	mm / inch	Measuring range mm / inch	mm	max.	Measuring force N	L mm	CC
240682	0 – 1.6	0.001 / 0.0001	±0.8 / ±0.03	0.001	0.01	0.07 ± 15%	13.0	on request

Crankshaft Testing Instruments

- for testing crankshaft deflections and for the alignment of crankshaft bearings during engine assembly
- used in ship engines, car engines, compressors, etc.



example

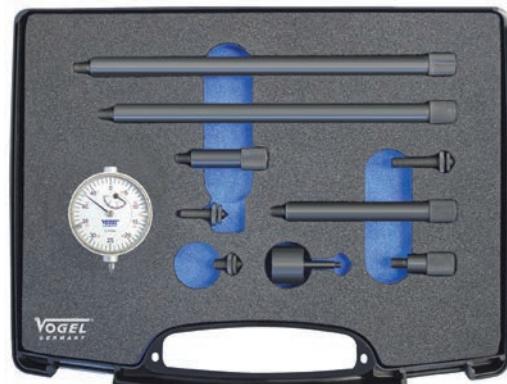

ART NO	mm	mm	housing-ø of dial indicator mm	CC
240162-2	60 – 500	0.01	40	on request

Precision Dial Test Indicators

Käfer • Dial Test Indicator

DIN 2270

- for toolmakers, for checking of difference measurement
- to check the parallelism, smoothness and trough running

- solid brass housing, matt chrome finish
- with friction clutch, means shock proof
- housing with dovetail guide
- important bearings machined in ceramic stones
- carbide measuring ball \varnothing 2 mm, exchangeable
- contact points reverses, always maintaining clockwise
- scale mounted in turnable knurled grip ring

ART N° 240600



ART N° 240601



ART N° 240602



DIN


ART N° form A	ART N° form B	ART N° form C	measuring range mm	mm	L mm	\varnothing D mm	quantity of dovetail guides		CC	
							form A+B	form C		
240600	240601	240602	0 – 40 – 0	0.8	0.01	12	32	3	2	on request
240610	240611	240612	0 – 100 – 0	0.2	0.002	12	32	3	2	on request
240630	240631	240632	0 – 25 – 0	0.5	0.01	35	32	3	2	on request
240640	240641	240642	0 – 40 – 0	0.8	0.01	12	40	3	2	on request
240650	240651	240652	0 – 25 – 0	0.5	0.01	35	40	3	2	on request
240660	240661	240662	0 – 100 – 0	0.2	0.002	12	40	3	2	on request

Dimensions of Dial Test Indicators


DIN 2270

article-type	D mm	E mm	G mm	H mm
240600+240610	32	5.6	7.1	69.5
240601+240611	32	5.6	7.7	69.5
240602+240612	32	5.6	7.5	69.5
240630	32	5.6	7.1	69.5
240631	32	5.6	7.7	69.5
240632	32	5.6	7.5	73.5
240640+240660	40	6.0	7.5	73.5
240641+240661	40	6.0	8.1	73.5
240642+240662	40	6.0	7.9	73.5
240650	40	6.0	7.5	73.5
240651	40	6.0	8.1	73.5
240652	40	6.0	7.9	98.4


form A

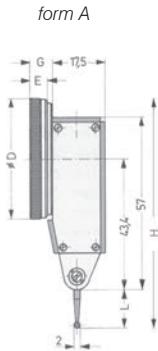

form B

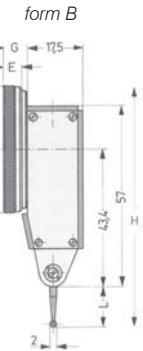

form C

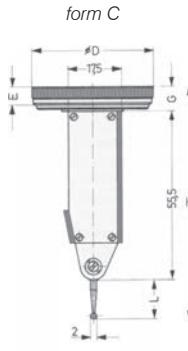

Dial Test Indicator

• standard quality

- solid brass housing, matt chrome finish
- carbide measuring ball \varnothing 2.5 mm, exchangeable
- contact points reverses, always maintaining clockwise
- scale mounted in turnable knurled grip ring
- incl. clamp holder \varnothing 6 mm + \varnothing 8 mm at art.-no. 246600 until 246660

Accessories for test indicators
can be found on page 173

ART N° 246641



ART N° 246600



ART N°	form	mm	measuring range mm	mm	L mm	\varnothing D mm	quantity of dovetail guides		CC
							Form A	Form C	
246600	A	0 – 40 – 0	0.8	0.01	13.5	30.0	3		on request
246610	A	0 – 100 – 0	0.2	0.002	13.5	30.0	3		on request
246640	A	0 – 40 – 0	0.8	0.01	16.5	37.5	3		on request
246641	A	0 – 40 – 0	0.8	0.01	43.4	30.0	3		on request
246660	A	0 – 100 – 0	0.2	0.002	13.5	37.5	3		on request
246661	A	0 – 40 – 0	0.8	0.01	43.4	37.5	3		on request

Accessories for Precision Dial Test Indicators

Probes for Dial Test Indicators

- suitable for electr. digital dial test indicators art.-no. 240680 + 240681
- with carbide ball, length 12.5 + 36.5 mm



2409681
Ø 1 x 12.5 mm



2409682
Ø 2 x 12.5 mm



2409683
Ø 3 x 12.5 mm



2409684
Ø 1 x 36.5 mm



2409685
Ø 2 x 36.5 mm



2409686
Ø 3 x 36.5 mm

Probes for Dial Test Indicators

- suitable for dial test indicators art.-no. 240600 – 240662
- with carbide or ruby ball, length 12 + 35 mm



2409690
Ø 0.4 x 12 mm



2409691
Ø 1 x 12 mm



2409692
Ø 2 x 12 mm



2409693
Ø 3 x 12 mm



2409694 / Rubin
Ø 2 x 12 mm



2409695
Ø 1 x 35 mm



2409696
Ø 2 x 35 mm



2409697
Ø 3 x 35 mm



2409698 / Rubin
Ø 2 x 35 mm

Probes for Dial Test Indicators

- suitable for dial test indicators art.-no. 246600 – 246690
- with carbide ball, length 13.5 mm + 16.5 mm



2409699
Ø 2 x 13.5 mm



2409687
Ø 2.5 x 16.5 mm

Spanner for Probes





ART NO

240999

Reference to application of Dial Test Indicators

For accurate measurements the axis of the contact point must be perpendicular to the measuring direction (fig.1). If this is not possible, it is necessary to multiply the reading on the dial with a correction factor, which depends on an angle α (fig. 2). The correction factor is negligible for angles below 15°.

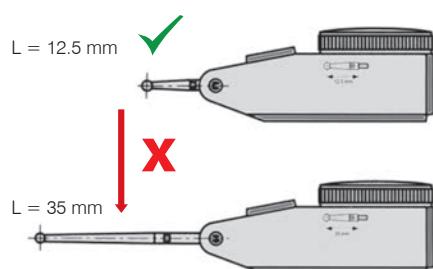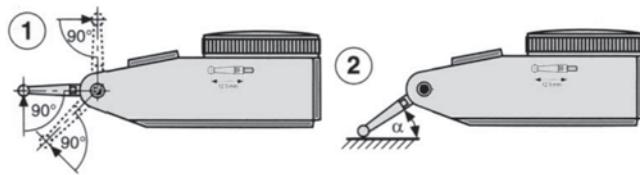

Use only the probe whose length is engraved on the housing, please!

angle α	15°	30°	45°	60°
corr.-faktor	0.96	0.87	0.70	0.50
example:				
angle α :	30° (estimated)			
reading on dial:	0.38 mm			
measuring result:	0.38 x 0.87 = 0.33 mm			

Zero Setting Device and Zero Centering Indicators

Electr. Digital Zero Setting Device • IP65

- water- and coolant proof acc. to DIN 40050 / IEC 60529
- with magnet inserts in the bottom
- for setting tools (e.g. end mills) to zero determining the reference point of the machine spindle
- no damage to cutting edge of tool during setting
- sturdy metal housing, black burnished
- LCD display with clear reading, digit height 8 mm
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), and operation manual



example




ART NO	mm / inch	spring range of contact plate mm / inch	contact plate-Ø mm	→ mm ←
271010	0.001 / 0.00005	0 – 2.40 / 0 – 0.094	24	ø 50 x 51

Zero Setter with permanent magnetic base

- to adjust the tools, for example milling tools, to the „0“-position and for to determine the reference point of the machine spindle
- no feeler gauge or starting contact is needed
- no damages at the measuring element and at the work piece

Operational instruction:

- calibrate the zero setter by putting a parallel on the setter and press it against on the spring loaded surface and set the dial gauge at „0“
- put the setter on machine table or workpiece reference surface.
- Move spindle to bring cutting tool to touch measuring surface and read
- the dial gauge carefully. When the dial points are at „0“, the distance between tool end and machine table is 50 mm (± 0.01 mm)



ART NO	mm	spring range of contact plate mm	contact plate-Ø mm	total height mm	→ mm ←	max. ± mm
271052	0.01	0 – 2	32	50	50 x 50 x 50	0.01

Centering Indicator

- for the centrical alignment of bores and spindles on tool machines

- with bended and straight probes in different length
- clamping shaft ø 10 mm
- reading 0.01 mm
- accuracy of centering 0.02 mm

ART NO 272011




ART NO	mm	→ mm ← mm	Length of straight probes mm	Length of bended probes mm	Length of center probes mm
272001	0.01	0 – 3	45, 100, 154	46, 100, 154	52.5
272011	probes set	—	45, 100, 154	46, 100, 154	52.5

Edge Finders, 3D-Probes and Spare Part

Edge Finders


- with LED signal light
- art.-no. 270015 + 270018 with acoustic signal and signal light
- for adjusting basic surfaces or edges
- stainless, hardened, fine ground
- with hardened contact ball

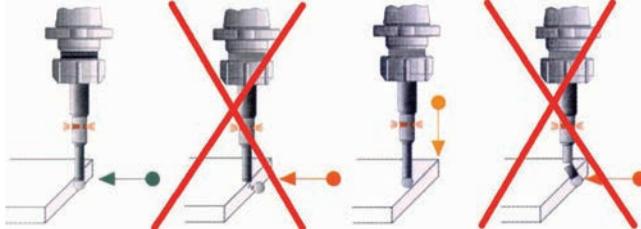

ART No	type	acoustic signal	contact ball-Ø mm	clamping shaft-Ø mm	mm	ART No	battery	battery type
270015	2-D	✓	10	20	158	90008	23 A / 12 V	
270017	3-D	—	10	16	111	90008	23 A / 12 V	
270018	3-D	✓	10	20	131	90008	23 A / 12 V	

3D-Probe, with Dial Indicator

- extremely slim and rugged housing
- allows quick and easy determination of workpiece zero points and length
- contact point with predetermined breaking point
- large travel paths, limited by mechanical stops
- solid carbide ball, with standard probe, size Ø 3 x 27 mm (art.-no.: 279911)

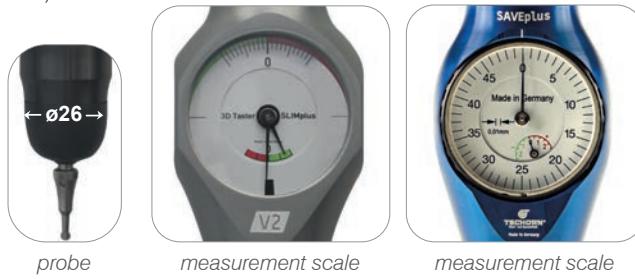

ART No 270210 ART No 270215



ART No	type	mm	contact ball-Ø mm	clamping shaft-Ø mm	mm
270210	3-D	-1.5 / 0 / 2	3	12	124
270215	3-D	-1.5 / 0 / 2	3	12	134

Probes, as Spare Part

- solid carbide ball



ART No	description	ball-Ø mm	mm
279911	probe „Standard“	3	27
279912	probe „Extra“	6	62

Edge Finders

Edge Finders

- for adjusting basic surfaces or edges

- rotational speed of spindle approx 400 – 600 r.p.m.
- hardened steel, HRC 58


Options

- Spare Part Spring (art.-no.: 270090) for Edge Finder art.-no. 270010 / 270011
- Spare Part Spring (art.-no.: 270091) for Edge Finder art.-no. 270009

ART No 270011

ART No 270010

ART No 270009

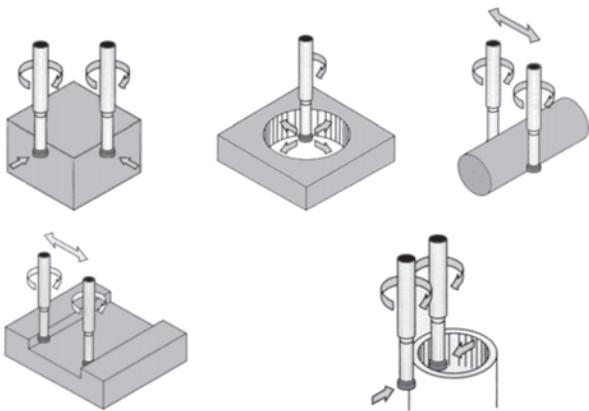

ART No steel, hardened	contact tip-Ø mm	clamping shaft-Ø mm	mm
270009	6 / 10	10	74
270010	10	10	84
270011	4 / 10	10	88

Follow us on Facebook.

Never miss any news about our products, promotions and offers.



Any questions?
We are pleased to advise.

[facebook.com/VogelGermany](https://www.facebook.com/VogelGermany)

Universal Magnetic Measuring Stands

- for all kind of measurements in various position
- for professional use
- chromed stem, with fine adjustment
- clamping connection by cross head at art.-no. 250201 + 250203
- with clamping connection by grip clamp at art.-no. 250204
- sturdy magnetic block, On/Off-rotary switch made of aluminium, prismatic base and with a flat ground face backwards
- hammer blow blue lacquered magnetic block
- dial indicator shank ø 8 mm



clamping head at art.-no. 250204



Option
2599201



ART NO	total height mm	column ø x lenght mm	arm length mm	thread mm	magnetic block mm	magnetic power ~ N
250201	295	16 x 230	250	M 10	70 x 45 x 65	650
250203	500	20 x 420	250	M 12	75 x 60 x 80	800
250204	295	16 x 230	250	M 10	70 x 45 x 65	650
wooden box with foam insert						
2599201	for art.-no. 250201 + 250204			→ [mm] ← 345 x 146 x 77		
2599203	for art.-no. 250203			→ [mm] ← 573 x 146 x 77		

Universal Magnetic Measuring Stands

- for all kind of measurements in various position
- economy model, for simple demands
- chromed stem, with fine adjustment, lacquered magnetic block
- clamping connection by cross head
- sturdy magnetic block, On/Off-switch made of rugged plastic, prismatic base and with a flat ground face backwards
- dial indicator shank ø 4 mm and ø 8 mm



ART NO	total height mm	column ø x L mm	arm length mm	thread mm	magnetic block mm	magnetic power ~ N
252001	235	12 x 175	140	M 8	65 x 50 x 55	600
252002	280	16 x 220	200	M 10	65 x 50 x 55	600

Measuring Stands

Magnetic Measuring Stands

- triple-jointed arm with central mechanical clamping
- particularly for use in hard to reach places
- high-end product with unrestricted mobility
- elongated aluminium column, corrosion-resistant, universal rotating
- with fine adjustment by knurled screw
- sturdy magnetic block
- art.-no. 250301: with On/Off-rotary switch made of aluminium
- hammer blow lacquered magnetic base
- magnetic block with prismatic base and with a flat ground face backwards
- dial indicator shank ø 8 mm and with dovetail for dial test indicators



Option
2599301



ART NO	total height mm	column ø x length mm	arm length mm	thread mm	magnetic block mm	magnetic power ~ N
250301	430	18 x 370	320	M 10	70 x 45 x 65	650
wooden box with foam insert						
2599301	for art.-no.: 250301				→ [mm] ←	307 x 170 x 70

Magnetic Measuring Stands

- triple-jointed arm with central mechanical clamping
- all joints are clamped with just one twist grip
- ball joints allow a fast and safe positioning
- infinitely adjustable clamping force with high stability
- scratch-resistant, black anodized column
- with fine adjustment by knurled screw
- dial indicator shank ø 6 mm, ø 8 mm and for dove tail clamping
- magnetic base with On/Off-switch
- hammerblow lacquered magnetic base, with prism base

ART NO 250333



ART NO	total height ~ mm	total length of column ~ mm	arm length ~ mm	thread mm	magnetic block mm	magnetic power ~ N
250331	350	295	140	M 8	65 x 50 x 55	800
250332	440	390	180	M 8	74 x 50 x 55	1000
250333	695	640	270	M 10	118 x 50 x 55	1300

Magnetic Measuring Stands

- with central mechanical clamping
- particularly for use in hard to reach places
- standard model with unrestricted mobility
- chromed column, corrosion-resistant, universal turnable
- art.-no. 255001, 250319 and 250320:
with sturdy magnetic block, On/Off-switch
- with prismatic base and with a flat ground face backwards,
- art.-no. 250300 and 250304 with permanent magnetic base
with lacquered magnetic block
- dial indicator shank ø 8 mm and dovetail for dial test indicators,
with fine adjustment
- art.-no. 250300 and 250320 with shank ø 6 mm and dovetail



ART NO	total height mm	column ø x length mm	arm length mm	thread mm	magnetic block mm	magnetic power ~ N
255001	400	10/12 x 345	330	M 8	65 x 50 x 55	600
250300	105	10/17 x 65	45	M 5	Ø 28 x 30	120
250304	205	8/20 x 175	100	M 5	Ø 35 x 30	120
250319	210	8/20 x 175	100	M 5	36 x 30 x 35	300
250320	108	10/17 x 65	45	M 5	36 x 30 x 35	300

Universal Measuring Stands

- with flexible articulated arm
- particularly for use in hard to reach places
- with unrestricted mobility
- flexible stem with locking lever, adjustable to any position
- sturdy magnetic block, On/Off-switch
- with prismatic base and with a flat and fine ground face backwards
- with lacquered magnetic block
- dial indicator shank for ø 10 mm and ø 8 mm adjustable



ART NO	total height mm	column ø x length mm	arm length mm	thread mm	magnetic block mm	magnetic power ~ N
251501	395	16 x 340	240	M 8	65 x 50 x 55	600

Measuring Stands

Universal Magnetic Measuring Stand

NEW

- for professional 3-point clamping with just one twist grip
- stable clamping with ergonomically shaped handle
- ball joint in the foot for flexible positioning, with clamping lever

- stable frame with black anodized surface
- with fine adjustment by knurled screw
- dial indicator holder for clamping shanks ø 6 mm, ø 8 mm and dovetail
- tension foot with plastic on / off lever
- tension foot with 4 strong permanent magnetic points, black painted



tension foot with ball joint



tension foot with 4 strong permanent magnetic points



ART No	total height mm	colum-ø x L mm	cross arm-ø x L mm	thread mm	tension foot mm	magnetic force without a protective cap ~ N
250120	360	13.5/25 x 135	25/10 x 115	M 8	110 x 70 x 42	320

Magnetic Measuring Stand

NEW

- triple-jointed arm with central mechanical clamping
- ball joints allow a fast and safe positioning
- all joints are clamped with just one twist grip
- with fine adjustment on the magnetic base

- stable frame with black anodized surface
- dial indicator holder for clamping shanks ø 6 mm, ø 8 mm and dovetail
- magnetic base with plastic on / off switch
- hammer blow lacquered magnetic base, with prism base

ART No 250110



fine adjustment on
the magnetic base



ART No	total height ~ mm	colum-ø x h mm	cross arm-ø x h mm	thread mm	magnetic block mm	magnetic power ~ N
250110	350	27/31.5 x 145	24/33 x 150	M 8	65 x 50 x 55	800
250111	410	28/34 x 180	24/33 x 150	M 8	74 x 50 x 55	1000

Universal Magnetic Measuring Stand NEW

- for professional 3-point clamping with just one twist grip
- stable clamping with ergonomically shaped handle
- with fine adjustment on the magnetic base
- stable frame with black anodized surface
- dial indicator holder for clamping shanks ø 6 mm, ø 8mm and dovetail
- Magnetic base with plastic on / off switch
- hammer blow lacquered magnetic base, with prism base



ART NO 250101



ART NO 250102



ART NO 250103



object clamp

stable clamping with
rotary handle

fine adjustment at the
magnetic base



ART NO	total height mm	column-ø x h mm	cross arm-ø x h mm	thread mm	magnetic block mm	magnetic power ~ N
250101	280	10 x 120	8 x 110	M 5	40 x 30 x 35	400
250102	450	12 x 200	10 x 190	M 8	65 x 50 x 55	800
250103	550	16 x 260	12 x 225	M 8	75 x 50 x 55	1000



**Send us a
partnership request**



OXOMI.com



Complete catalogue
assortment searchable
on OXOMI.com

Measuring Stands and Magnetic Holder

Measuring Stand, with Vacuum-Base

- triple-jointed arm with central mechanical clamping
- particularly for use in hard to reach places
- high-end product with unrestricted mobility
- elongated aluminium column, corrosion-resistant, universal rotating
- with fine adjustment by knurled screw
- vacuum-base with extrem and permanent vacuum force and with locking lever
- dial indicator shank ø 8 mm and with dovetail for dial test indicators



ART NO	total height mm	column ø x length mm	arm length mm	thread mm	vacuum-base mm
250305	395	18 x 370	320	M 8 + M 10	Ø 110

Magnetic Holder

- with flat base
- small and compact instrument suitable for all dial indicator types
- with sturdy, round permanent magnet
- dial indicator shank ø 8 mm



ART NO	total height mm	column-ø mm	arm length mm	→ mm ← magnetic base
250504	60	16	44	Ø 46 x 14

Mini-Magnetic Measuring Stand NEW

- all joints are clamped with just one twist grip
- swivel joint allow quick and safe positioning
- scratch-resistant, black anodized surface
- dial gauge holder for clamping shanks ø 8 mm
- 360° swivelling
- magnet with fine ground prism (only at art.-no.: 250506)



side view



bottom side with
magnetic prism



bottom side with
2 magnetic points



ART NO	total height ~ mm	arm length mm	thread mm	magnetic block mm	magnetic power ~ N
250505	46	35	M 8	73 x 37 x 12	180
250506	59	35	M 8	73 x 37 x 26	180

Magnetic and Vacuum Bases

Magnetic Base

- the thread is eccentrically placed on the surface, so that the magnetic core is protected from smut
- sturdy magnetic block, On/Off-rotary switch from aluminium
- hammer blow blue lacquered
- magnetic block with prismatic base and with a flat ground face backwards



ART No	thread mm	suitable for art.-no.	→ [mm] ←	magnetic power ~ N
250210	M 10	250201 / 250204 / 250301	70 x 45 x 65	650
250212	M 12	250203	75 x 60 x 80	800

Magnetic Base

- sturdy magnetic block, On/Off-switch
- magnetic block with prismatic base and with a flat ground face backwards
- hammer blow lacquered

ART No 252014



ART No 252015



ART No 250310



ART No 252010



ART No	thread mm	suitable for art.-no.	→ [mm] ←	magnetic power ~ N
252010	M 8	252001 / 250401 / 251501 / 255001	58 x 50 x 55	800
252012	M 8	252001 / 250401 / 251501 / 255001 / 250332	74 x 50 x 55	1000
252014	M 5	250319 / 250320	36 x 30 x 35	300
252015	M 8	252001 / 250401 / 251501 / 255001	75 x 46 x 54	600
250310	M 10	250333	118 x 50 x 55	1300

Vacuum Base

- with powerful suction power
- with locking lever
- solid aluminium dye-cast housing
- with M10 and M8 threads



ART No	thread mm	suitable for art.-no.	→ [mm] ←
250312	M8 and M10	250305	Ø 90 x 20

Measuring Stand Columns

Measuring Stand Columns

- with mechanical clamping
- with fine adjustment



ART No	column ø x length mm	thread mm	suitable for art.-no.	material	shank-ø mm
250308	370	M 10	250301 + 250305	aluminium	8 + dovetail
250314	175	M 5	250304 + 250319	steel, chromed	8 + dovetail
250316	75	M 5	250300 + 250320	steel, burnished	6 + dovetail
250341	201	M 8	250331	steel, anodized	6 + 8 + dovetail
250342	246	M 8	250332	steel, anodized	6 + 8 + dovetail
250343	568	M 8	250333	steel, anodized	6 + 8 + dovetail
255008	345	M 8	255001	steel, chromed	8 + dovetail
259925	150/190	ø 8 x 40	shaft-ø 8 mm	steel, chromed	8 + dovetail

Measuring Stand Columns

- rigid column
- with fine adjustment



ART No	column ø x length mm	thread mm	suitable for art.-no.	material	shank-ø mm
250205	16 x 230	M 10	250204	steel, chromed	8
250208	20 x 425	M 12	250203	steel, chromed	8
250209	16 x 230	M 10	250201	steel, chromed	8
252008	16 x 220	M 10	252002	steel, chromed	8
252009	12 x 175	M 8	252001	steel, chromed	8

Measuring Stand Columns

- flexible tubular steel sections
- with wire-rope tension



ART No	column ø x length mm	thread mm	suitable for art.-no.	material	shank-ø mm
250508	16 x 340	M 8	251501	steel, burnished	6 + 8

Accessories and Wooden Boxes for Measuring Stands

Accessories for Measuring Stand Columns

ART No	article description
259902	cross joint for 250201
259903	cross joint for 250203
259909	cross joint for 252001
259910	cross joint for 252002
259906	grip clamp for 250204 + 251020
259901	dial indicator shank for 250201 / 250203 + 250204
259911	dial indicator shank for 250301 / 250302 + 250305 Ø 8+dovetail
259912	dial indicator shank for 250401 + 255001 Ø 8+dovetail
259904	spanner M6 for 252001 + 252002
259905	spanner M8 for 250201 / 250203 + 250204
259908	spanner M6 for 250304 + 250319



ART No 259902



ART No 259906



ART No 259901



ART No 259911



ART No 259912



ART No 259905



ART No 259908



ART No 259904

Wooden Boxes for Measuring Stands

ART No 2599201



ART No 2599301



ART No

→ [mm] ←

suitable for art.-no.

2599201	345 x 146 x 77	250201 + 250204
2599203	573 x 146 x 77	250203
2599301	307 x 170 x 70	250301

Measuring Tables

Measuring Tables

without dial indicator

- flat measuring table, steel, hardened and ground surface
- chromed column, rigid measuring arm, with fine adjustment
- dial indicator shank ø 8 mm



NORM

ART No	→ mm ←	total height mm	description of measuring table		arm length mm	column-ø mm	column-ø mm
			flat	serrated			
258011	ø 60	125	✓	—	75	25	0.008
258013	60 x 60	125	✓	—	75	25	0.008

Precision Measuring Table

without dial indicator

- measuring table, steel, hardened and ground surface
- table with dust grooves, dial indicator shank ø 8 mm
- stainless steel column, fine ground
- with adjustable arm



NORM

ART No	→ mm ←	total height mm	arm length mm	angle accuracy column/table		column-ø mm	evenness mm
				column	table		
258022	60 x 68	100	75	< 0.05°		22	0.002

Did you already know?

Join us for success is now
Measuring Solutions
The new slogan stands for even more
Service, Solutions and Consulting.


VOGEL®
GERMANY
Measuring Solutions

Precision Measuring Tables

DIN 876/00

- made of black granite
- for the measuring room and calibration laboratory

- measuring surface fine ground and diamond lapped
- hardened column with height adjustment and setting ring
- with adjustable cross arm
- dial indicator shank ø 8 mm

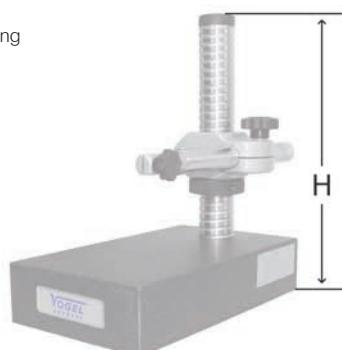

DIN

ART NO	→ mm ← table	meas.- height mm	arm length mm	total height (H) mm	column-ø mm	cross arm-ø mm
250815	240 x 140 x 50	165	180	270	35	22
250816	300 x 210 x 60	235	225	360	35	22
250817	400 x 300 x 70	300	270	450	35	22

Precision Measuring Tables

DIN 876/00

NEW

- made of black granite
- for the measuring room and calibration laboratory

- measuring surface fine ground and diamond lapped
- hardened column with height adjustment and setting ring
- with adjustable cross arm
- dial indicator shank ø 8 mm

Option

- cross arm with fine adjustment, art.-no.: 258052



ART NO 258051



DIN

ART NO	→ mm ← table	measuring height mm	arm length mm	total height (H) mm	column-ø mm
258051	80 x 80 x 20	120	62	205	25
258052	—	—	62	—	—



a strong partnership

Vogel Germany and Saliger-Gruppe have agreed on a far reaching cooperation in the procurement and calibration of measuring equipment.

With the new orientation, Vogel Germany is strengthening its offer of having measuring equipment tested in an independent calibration laboratory.

Saliger-Gruppe offers a cross-industry and manufacturer independent DAkkS-accredited calibration service.

In addition to factory calibrations, DAkkS calibrations can now also be offered for the almost complete range of Vogel Germany.

In order to be able to offer its customers an accelerated and simplified process flow, Vogel Germany has chosen this further route of combining calibration service with the procurement of new measuring equipment.

In cooperation with Saliger-Gruppe, the procurement of measuring equipment for the customers of Saliger-Gruppe is taken over by Vogel Germany.

Inquiries can now be submitted to your usual contact person or by email to info@vogel-germany.de or by telephone on +49 2832 9239-0.

Stephan Rex, Managing Director of Vogel Germany:

"We are pleased to have found a new partner in Saliger-Gruppe. The focus of the cooperation is an improved service for all aspects of measuring equipment. This will be reflected above all by a strong simplification in the complex procurement of measuring equipment and its calibration for the customer, as this service is available from a single source now.

The Saliger-Gruppe offers a variety of calibration options that Vogel Germany has not been able to offer to this extent before."

"Looking for a way to redesign our Saliger measuring equipment sales department, we are happy to have entered into close cooperation with Vogel Germany.

In times of increased demands on the calibration business, our main concern is to be able to continue to offer our customers a comprehensive range of services.

The cooperation with Vogel Germany enables us to concentrate on our core competencies and at the same time to expand the product portfolio for our customers."

Ulrich Saliger, Managing Director of Saliger-Gruppe:





Scribing Devices

Spring Compasses and Spring Buttons, inside and outside	196 – 197
Trammels.....	189
Internal and External Joint Compasses	189
Compass Vernier Calipers	189
Universal Protractors.....	199
Protractors, digital	200 – 202
Protractors, analog.....	200 – 201
Marking Gauges.....	202 – 203, 207
Universal Marking Gauges.....	203
Marking Calipers	204
Metal etching Pens.....	204
Scribers	204 – 205
Parallel V Block Pairs.....	207
Pairs of Prisms	207
Angle Prisms	208
Magnet, Measuring and Clamping Prisms	208
Lamellar Blocks, Prismatic Lamellar Blocks	209
Prisms with Clamps.....	209
Clamps for Prisms.....	210
Granite Measuring Cubes	210
Height and Marking Gauges, digital	211 – 213
Height and Marking Gauges, analog.....	212 – 213
Height and Marking Gauges, accessories	214
Inspection Squares, Workshop Squares, Bevel Edge Squares	215 – 217
Squares with Inside Bevelled Edge, Workshop Sqaures, Mechanic Squares ...	218 – 219
Carpenter's Squares, Universal Squares.....	220 – 221
Flange Squares	220
Combination Square Sets	221
Cente Squares	222
Bevel Squares, Mitre Squares.....	223 – 225
Acute Angle Squares	225

Image Directory • Scribing Devices

				
Page 196	Page 196	Page 196	Page 196	Page 196
				
Page 197	Page 197	Page 197	Page 197	Page 197
				
Page 198	Page 198	Page 198	Page 198	Page 198
				
Page 199	Page 199	Page 200	Page 200	Page 200
				
Page 200	Page 200	Page 200	Page 200	Page 201
				
Page 201	Page 201	Page 201	Page 201	Page 201
				
Page 201	Page 202	Page 202	Page 202	Page 202

Image Directory • Scribing Devices

Page 203	Page 203	Page 203	Page 204	Page 204
Page 204				
Page 205				
Page 205				
Page 207				
Page 208				
Page 209				
Page 210	Page 210	Page 210	Page 210	Page 211

Image Directory • Scribing Devices














				
Page 211	Page 212	Page 212	Page 213	Page 213
				
Page 214	Page 214	Page 214	Page 214	Page 214
				
Page 214	Page 214	Page 214	Page 214	Page 214
				
Page 215	Page 216	Page 216	Page 217	Page 217
				
Page 217	Page 217	Page 217	Page 218	Page 218
				
Page 218	Page 219	Page 219	Page 219	Page 219
				
Page 219	Page 220	Page 220	Page 220	Page 220

Image Directory • Scribing Devices

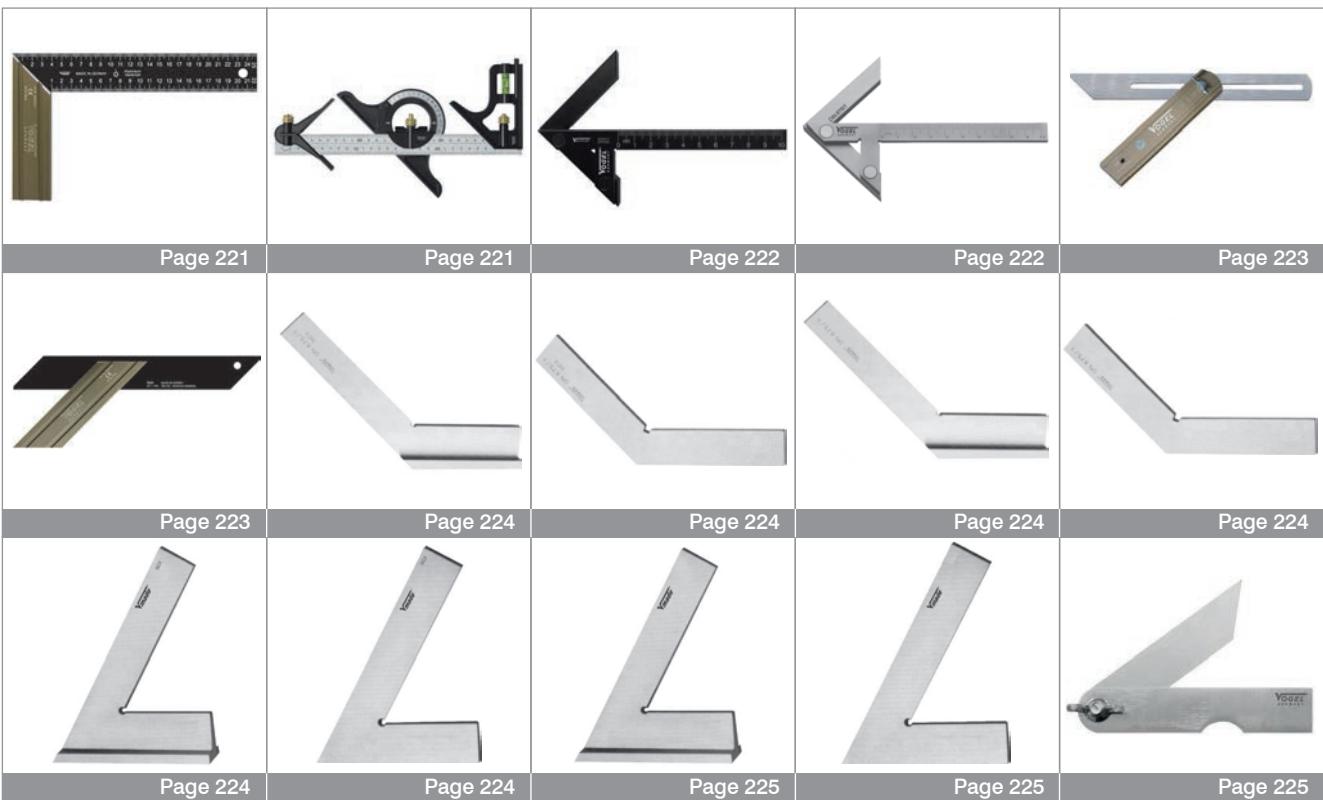

Dividers, Internal and External Spring Joint Compasses

Spring Divider

DIN 6486

- steel, polished
- square legs, with hardened tips
- with quick nut for quick movement



ART N° 302422



ART N° 302682

ART N° 3026899
pair of spare needles



DIN

ART N°
Divider

	→ [mm] ←
302420	100
302421	125
302422	150
302423	175
302424	200
302425	250
302426	300
302427	400
302428	500
302429	600

ART N°

Divider with exchangeable points

	→ [mm] ←
302680	100
302681	125
302682	150
302683	175
302684	200
302685	250
302686	300
302687	400
302688	500
302689	600

Internal and External Spring Joint Compass

DIN 6482/6484

- steel, polished
- square legs, with hardened tips
- with quick nut for quick movement
- with fine adjustment



ART N° 302442



ART N° 302462

DIN

ART N°
Spring Inside Compass

	→ [mm] ←
302440	100
302441	125
302442	150
302443	175
302444	200
302445	250
302446	300
302447	400
302448	500
302449	600

ART N°

Spring Outside Compass

	→ [mm] ←
302460	100
302461	125
302462	150
302463	175
302464	200
302465	250
302466	300
302467	400
302468	500
302469	600

Dividers, Internal and External Joint Compasses

Divider and Divider with Setting Wing

DIN 6486

- steel, polished
- square legs, with hardened tips
- with rivet



ART N° 302402



ART N° 302412



ART N° 302472

DIN

ART N° Divider	
302402	150
302403	175
302404	200
302405	250
302406	300
302407	400
302408	500

ART N° with setting wing	
302412	150
302413	175
302414	200
302415	250
302416	300
302417	400
302418	500

ART N° with holder	
302472	150
302473	175
302474	200
302475	250
302476	300
302477	400
302478	500

Internal and External Joint Compass

DIN 6482 / 6484

- steel, polished
- with flat legs
- with rivet



ART N° 302432



ART N° 302452

DIN

ART N° Inside Compass	
302432	150
302433	175
302434	200
302435	250
302436	300
302437	400
302438	500



ART N° Outside Compass	
302452	150
302453	175
302454	200
302455	250
302456	300
302457	400
302458	500

Precision Trammels

Trammel

- steel, with hardened, exchangeable points
- flat beam, with fine adjustment
- with fixing screws

ART N° 302986 **ART N°** 302996

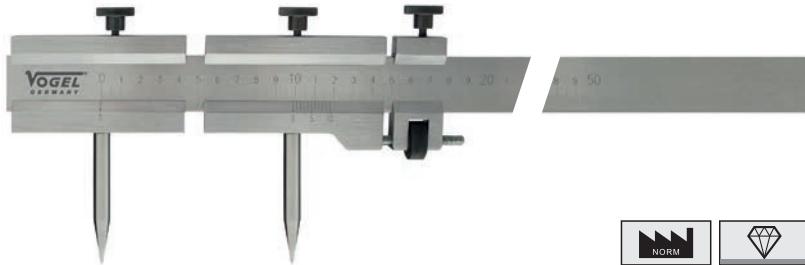

ART N°



ART N°	mm	mm
302911	500	0.1
302912	1000	0.1
302913	1500	0.1
302914	2000	0.1
302915	3000	0.1

ART N°

spare points,
in pair, hardened

302986	302996
302986	302996
302986	302996
302986	302996
302986	302996

ART N°

spare points,
in pair, carbide

302986	302996
302986	302996
302986	302996
302986	302996
302986	302996

Precision In- and Outside Caliper

- made of Dur-Aluminium, surface hardened HRC63
- scratch-resistant, black anodized surface
- laser engraved, clear reading scale



ART N°




total length
mm

ART N°	mm	mm	mm
303306	120	0.1	190
303307	160	0.1	250
303308	200	0.1	310
303309	250	0.1	380
303310	300	0.1	460


Compass Vernier Caliper

- for accurate marking owing to parallel position of the scribe jaws
- special steel, reading scale in matt chrome finish
- with fixing screw
- with carbide tips or hardened tips at your choice

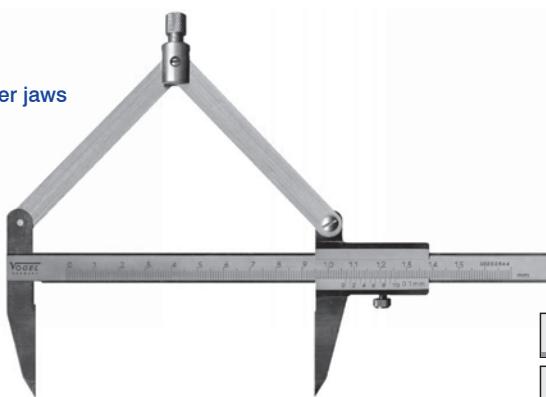

ART N° hardened tips

ART N° carbide tips



mm

ART N° hardened tips	ART N° carbide tips	mm	mm	mm
303002	303102	150	300	0.1
303003	303103	200	400	0.1
303004	303104	250	500	0.1
303005	303105	300	600	0.1

Universal Bevel Protractors

Electr. Digital Universal Bevel Protractor Set

- with data output
- with 3 blades (150 / 200 / 300 mm), 90° square and angle stop

- stainless steel, hardened and fine ground
- rugged ABS-plastic housing, multifunctional display
- with fine adjustment for easy adjustment and fixing device for the blade
- large LCD display with clear reading
- two display lines, resolution in 1. line with 0.005° and in 2. line with min. 10"
- preset to 360° / 180° / 90°, two measuring directions selectable
- On/Off button, mode-button, set-button, zero setting at any position
- automatic switch off after approx. 5 min
- operation temperature 0 °C ~ +40 °C, storage temperature -10 °C ~ +60 °C
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Option

- data transfer via cable, art.-no. 2420192, see page 334



Universal Bevel Protractor Set

- set with 3 blades in different length

- stainless, hardened and fine ground
- scales matt chrome finish
- parallaxfree reading by vernier, with large magnifying lens
- with fine adjustment
- incl. 90° angled adjustment (art.-no.: 321275) and angle stop (art.-no.: 321276)

Option

- wooden case (art.-no.: 3299020)

ART NO 321220	length of blades mm 150 / 200 / 300	360° / 2x 180° / 4x 90°	0.005° / 10"	5'	on request

Protractor (Skew Measurer)

- for standard mechanical engineering

- special steel, in chromed finish
- scale in matt chrome finish
- with adjustable blade, with fixing screw

Accessories can be
found on page 201



	on request



ART NO	length of blades mm	arc-Ø mm	angle graduation
320571	150	100	10 - 170°
320572	300	150	10 - 170°
320573	400	200	10 - 170°
320574	500	250	10 - 170°

Protractors, Accessories and Spare Parts for Universal Protractors

Electr. Digital Protractor

- for checking and transferring angles

- large LCD display with clear reading, digit height 10 mm
- blades in anodized aluminium with profile grooves, and embedded magnet strips
- On/Off button and data hold function, with fixing screw
- 180° rotating display, by pressing function button
- zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), operation manual




ART No	range °	accuracy °	max. length mm	length of blades mm	dimensions mm	
				mm	mm	CC
320021	0 – 360	0.05	0.3	200 x 200	205 x 45 x 30	on request
320022	0 – 360	0.05	0.3	300 x 300	305 x 45 x 30	on request

Protractor

- with fixing screw
- with half round plate

- special steel, chromed
- scale matt chrome finish
- double graduation from 0° – 180° in opposite direction



ART No	length of blades mm	arc Ø mm	accuracy °	
	mm	mm	°	CC
322541	150	80	0 – 180	on request

Spare Parts for Electr. Digital Universal Protractors

- art.-no. 320100

ART No	spare blade
320101	150
320102	200
320103	300

ART No 320101
ART No 320102
ART No 320103



ART No	90° angled adjustment	dimensions mm
		mm
321275		60 x 50 / 15 x 4
321276	angle stop	70/40 x 18 x 4



ART No 321275



ART No 321276

Protractors, Accessories and Spare Parts for Universal Protractors

Spare Parts for Universal Protractors

- art.-no. 321220

ART NO		spare blade
321225	150	
321226	200	
321227	300	
321229	500	
ART NO	magnifying glass, w/o screws	→ mm ←
321228		37 x 22
ART NO	angle stop	→ mm ←
321230		68 x 38 / 18 x 4



ART NO 321228




ART NO 321230

Protractor

- with fixing screw
- for standard mechanical engineering

- made of Dur-Aluminium, surface hardened HRC63
- scratch-resistant, black anodized surface
- laser engraved, clear reading scale



ART NO	length of blade mm	arc-Ø mm	°	CC
322511-2	120	80	0 – 180	on request
322512-2	150	120	0 – 180	on request
322513-2	200	150	0 – 180	on request
322514-2	300	200	0 – 180	on request
322515-2	500	300	0 – 180	on request

Protractor

- with fixing screw
- for standard mechanical engineering

- special steel, in chromed finish
- scale in matt chrom finish, laser engraved scale



ART NO	length of blade mm	arc-Ø mm	°	CC
322511	120	80	0 – 180	on request
322512	150	120	0 – 180	on request
322513	200	150	0 – 180	on request
322514	300	200	0 – 180	on request
322515	500	300	0 – 180	on request
322516	600	300	0 – 180	on request

Protractors and Marking Gauges

Electr. Digital Bevel Protractor

- for high precision accuracy and safety reading

- LCD display with clear reading, digit height 10 mm
- stainless, hardened and fine ground
- On/Off button, with fixing screw
- zero setting at any position, with data hold function
- reading of values in display by 180° switchable
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual



ART N° 320201

ART N° 320202 – 320203



ART N°	length of blade mm	arc-Ø mm	mm	°	mm	max. mm	°	CC
320201	150	120	0 – 180	0.05	0.3	on request		
320202	200	150	0 – 180	0.05	0.3	on request		
320203	300	200	0 – 180	0.05	0.3	on request		

Protractor (Skew Measure)

- for high precision accuracy and safety reading

- LCD display with clear reading, digit height 10 mm
- stainless, hardened and fine ground
- On/Off button, with fixing screw
- zero setting at any position, with data hold function
- reading of the values in the display from 10° – 170°
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual




ART N°	length of blade mm	arc-Ø mm	angle graduation	CC
320581	150	100	10 – 170	on request
320582	300	150	10 – 170	on request
320583	400	200	10 – 170	on request

Marking Gauge

- with flat sliding ruler and marking block
- with fixing screw

- made of Dur-Aluminium, surface hardened HRC63
- scratch-resistant, black anodized surface
- marking block made of steel
- laser engraved, clear reading scale
- vernier reading 0.05 mm



ART N°	mm	mm	mm
336230	200	0.05	298 x 60 x 16
336231	250	0.05	348 x 60 x 16
336233	300	0.05	400 x 60 x 16

Marking Gauges and Marking Vernier Calipers

Marking Gauge NEW

- with flat sliding ruler and marking block

- with fitting screw
- made of Dur-Aluminium, surface hardened HRC63
- scratch-resistant, black anodized surface
- with hardened steel marking block, locking screw
- laser engraved, clear reading scale
- marking block 44 mm high



ART NO	mm	mm	mm
336260	200	0.05	300 x 60 x 44
336261	250	0.05	350 x 60 x 44
336262	300	0.05	400 x 60 x 44

Marking Gauge

- with flat sliding rule
- with metal fixing screw

- stainless steel blade, with hardened marking block
- laser engraved scale, blade surface matt chrome finish
- with vernier reading 0.1 mm



ART NO	mm	mm	mm
336220	200	0.1	260 x 40/50 x 25
336221	250	0.1	305 x 40/50 x 25
336223	300	0.1	360 x 40/50 x 25

Universal Marking Gauge

- with contact-roll
- carbide scriber, exchangeable

- stainless steel, hardened
- laser engraved scale, reading parts in matt chrome finish
- 2nd scriber as spare part included




ART NO	mm / inch	mm	ART NO carbide scriber (spare part)
335070	200 / 8	0.1	335072
335071	400 / 16	0.1	335072

Marking Vernier Calipers, Etching Pen and Steel Scriber

T-Marking Vernier Calipers

- with mm-graduation at the edge of the T-bar
- special steel, hardened, with fine adjustment
- laser engraved scale, reading parts in matt chrome finish

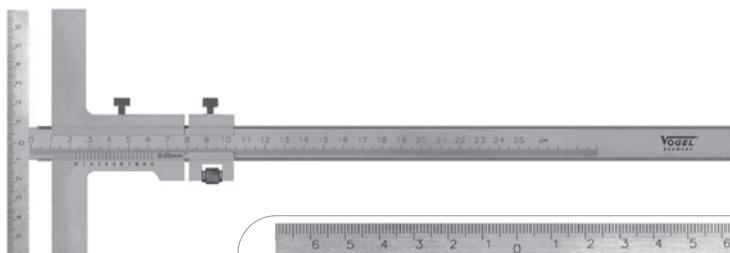

ART N°	cm	mm	length of T-bar mm
337301	16	0.05	100
337302	25	0.05	140
337303	30	0.05	160
337305	50	0.05	160

Emil Otto • Metal Etching Pens

- for markings on metal and aluminium
- with exchangeable ink tank
- chemical and thermal resistant
- package contents 1 pen holder and 2 cartridges



ART N° for metal (green liquid)	ART N° for aluminium (light blue liquid)	ART N° for tool steel (blue liquid)	ART N° NEW for titanium and titanium alloys (turquoise dark blue)
334501	334502	334503	334504

ART N° spare part ink tank for metal (green liquid)	ART N° spare part ink tank for aluminium (light blue liquid)	ART N° spare part ink tank for tool steel (blue liquid)	ART N° NEW spare part ink tank for titanium and titanium alloys (turquoise dark blue)
334591	334592	334593	334594

Steel Scribes

- with hardened tips
- made from special steel



ART N°	mm	scriber-ø mm	version
334600	180	5	straight bar, knurled handle
334602	230	4	straight and cranked bar, with plastic handle
334603	175	4	straight bar, exchangeable tip, knurled handle
334604	250	4	straight and cranked bar, exchangeable tips, knurled handle
334614	143	7	telescopic rod, with marking tip and magnetic lifter
334691	90	4	spare tip, straight (for art.-no.: 334604)
334692	100	4	spare tip, cranked (for art.-no.: 334604)

Steel Scribes

- with tungsten carbide tips



ART No 334606



ART No 334612

ART No 334608



ART No 334610



ART No 334611



ART No 334615



ART No	→ mm	shaft-Ø mm	version
334606	175	14	straight bar, with red plastic handle
334608	150	6	hexagonal bar, galvanized, with clip
334609	180	8	hexagonal bar, galvanized, without clip
334610	150	8	hexagonal, aluminium shaft, lacquered, with drop mechanic
334695	35	—	spare tip, carbide, for 334610
334611	150	10	„RICO“-Marker, aluminium shaft, knurled handle, pen type
334694	70	—	spare tip, carbide, for 334611
334612	230	4	straight and cranked bar, exchangeable tips, knurled handle
334615	150	9	carbide marker, push technic, with clip
334690	30	—	spare tip, carbide, straight version, for 334615
334696	90	—	spare tip, carbide, straight version, for 334612
334697	100	—	spare tip, carbide, cranked version, for 334612

Steel Scribes

- with tungsten carbide needle
- with clip and magnet

- made of steel, black burnished
- with exchangeable needle
- with anti-slip knurled handle



with magnet



ART No	→ mm	shaft-Ø mm	version
334620	155	7.5	with tungsten carbide tip, anti-slip knurled handle
334629	—	3	spare part, tungsten carbide needle

Trade Fairs, Customer- and In-House Shows



We seek the dialogue
where you are at home...

Trade fairs, customer- and in-house exhibitions.

Hereby we see an opportunity to support your company in the implementation of your customers and in-house shows, so that you can achieve your customers need precisely.

We offer a lot of service and support to you.

Contact us,
we are happy to help.

Marking Gauges, Parallel V-Block- and Prism Pairs

Marking Gauge

- with round bar

- chromed bar and scale, with 0.1 mm vernier reading
- with round contact plate, with fixing screw
- with or without fine adjustment, at your choice
- with exchangeable, hardened marking needle



cm

ART No	ART No	cm		ART No spare needle
335030	335031	30	0.1	335066
—	335051	50	0.1	335066

Parallel V-Block Pairs

- made of dense special cast iron with high resistance to wear
- supplied in matched pair
- 4 different large grooves, 90°
- available in milled or ground version

grade 0 = ground parallelism tolerance = ±0.008 mm
 grade 1 = ground parallelism tolerance = ±0.016 mm
 grade 3 = milled parallelism tolerance = ±0.064 mm




ART No grade 0	ART No grade 1	ART No grade 3	mm	for shaft-ø mm
333511	333501	333531	60 x 120 x 100	8 – 90
333512	333502	333532	75 x 150 x 130	10 – 120
333513	333503	333533	90 x 200 x 170	12 – 180

Prism Pair

- made of dense special cast iron with high resistance to wear
- supplied in matched pair
- with 1 large cut, 90°
- available in milled or ground version

grade 0 = ground parallelism tolerance = ±0.008 mm
 grade 1 = ground parallelism tolerance = ±0.016 mm
 grade 3 = milled parallelism tolerance = ±0.064 mm

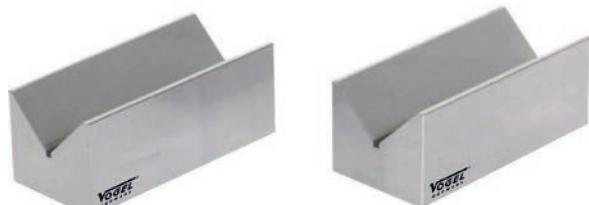


ART No grade 0	ART No grade 1	ART No grade 3	mm	for shaft-ø mm
333101	333201	333301	100 x 40 x 30	6 – 40
333102	333202	333302	150 x 50 x 40	8 – 50
333103	333203	333303	200 x 70 x 50	8 – 70
333104	333204	333304	250 x 85 x 60	12 – 85
333105	333205	333305	300 x 100 x 70	12 – 100

Prisms and Magnetic V-Blocks

Adjustable Angle Prism

- special steel, hardened, fine ground
- prism cut 90°, angle scaling 0° – 60° / 0° – 30°

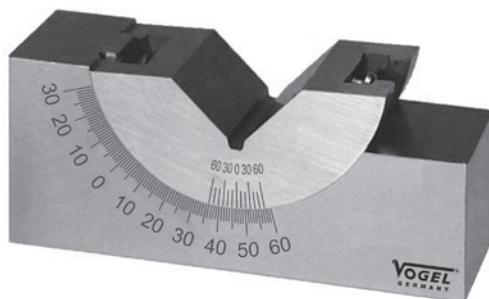

ART NO

	→ mm ←	parallelism tolerance ± mm	for shaft-Ø mm
334001	75 x 25 x 32/23	0.05	28
334002	102 x 30 x 48/29	0.05	40
334003	102 x 46 x 48/29	0.05	40

Magnetic Measuring and Clamping V-Block

- especially engineered for toolmakers etc.


- made of special steel
- with V-cut 90°, finely ground
- strong magnetic block
- with On/Off-rotary switch made of aluminium
- magnetic base with finely ground prism
- plane, parallel and squared machined


ART NO

	→ mm ←	for shaft-Ø mm	parallelism tolerance ± mm	prism N	surface N
330100	80 x 67 x 96	Ø 6 – 66	0.004	400	900
330101	100 x 70 x 96	Ø 6 – 72	0.004	650	1800

Magnetic Measuring and Clamping V-Block

- special steel made
- with On/Off switch
- art.-no. 331000 – 331002: with flat magnetic base
- art.-no. 331010 – 331012: with magnetic prism base
- with V-cut 90°, fine ground
- plane, parallel and squared machined


ART NO 331010 + 331011

ART NO 331002

ART NO
steel

	→ mm ←	for shaft-Ø mm	parallelism tolerance ± mm	N	flat base	prism base
331000	101 x 76 x 78	Ø 6 – 40	0.05	700	✓	—
331001	127 x 60 x 73	Ø 6 – 35	0.05	600	✓	—
331002	70 x 60 x 73	Ø 6 – 30	0.05	700	✓	—
331010	80 x 70 x 95	Ø 6 – 30	0.05	800	—	✓
331011	101 x 67 x 95	Ø 6 – 70	0.05	1000	—	✓
331012	115 x 75 x 100	Ø 6 – 70	0.05	800	—	✓

Lamellar Blocks and V-Blocks with Clamp

Lamellar Block / Prism Lamellar Block

- for setting on magnetic holding plates

- special steel, fine ground
- with 90° cut or in flat version
- with pole distance 4 mm


ART N° 331040



ART N° 331030



ART N° 331041



ART N° flat	→ mm ←	ART N° with V-cut	→ mm ←
331030	100 x 50 x 25	331040	50 x 60 x 48
—	—	331041	100 x 60 x 48

V-Block with Clamp

- for clamping cylindrical pieces

- special steel, hardened, fine ground
- 2 different deep 90° V-cuts
- 2 supporting surfaces
- single or in pair adjusted available



ART N° single	ART N° pair	→ mm ←	clamping range for ø mm	max. ± mm / 100 mm
333001	333011	45 x 40 x 35	5 – 20	0.01
333002	333012	70 x 45 x 40	5 – 25	0.01

V-Block Pair with Clamps

- for clamping cylindrical pieces and marking purposes, etc.

- special steel, hardened or stainless steel hardened
- 2 different deep 90° V-cuts, surfaces finely ground
- front faces angular ground in regard to base area, adjusted in pairs

Option

- wooden boxes available, by extra charge, see page 210



ART N° special steel pair	→ mm ←	clamping range for ø mm	max. ± mm / 100 mm
333041	50 x 40 x 50	5 – 30	0.01
333042	75 x 55 x 55	5 – 50	0.01
333043	100 x 75 x 75	7 – 70	0.01

Prisms and Accessories for Prisms

Replacement Clamp for Prisms

- single packed

ART NO	suitable for
3330901	333001 + 333011
3330902	333002 + 333012
3330941	333041
3330942	333042
3330943	333043

ART NO 3330941



ART NO 3330901



Wooden Boxes for Prisms

- single packed

ART NO	suitable for
3399041	333041
3399042	333042
3399043	333043



Granite Square Block

- accuracy grade 00
- with V-cut 90° (without measuring stand, without dial indicator)
- to use as measuring table for measurements and marking purposes
- particularly well selected material of highest quality
- with V-cut 90°, finely ground
- side- and front faces angular ground in regard to base area
- with thread insert M10

Measuring stands see pages 184
Dial indicators see on pages 151 – 162



example



ART NO	→ mm ←	rectangularity ± mm	evenness ± mm	parallelism ± mm	CC
330611	150 x 150 x 150	0.004	0.0017	0.004	on request


Digital Height and Marking Gauges

Electr. Digital Height and Marking Gauge

- with „ABSOLUT“ system
- with data output, top model
(connectivity also for Digimatic measuring devices)
- stainless steel guideway, with fine adjustment
- LCD with clear figures
- On/Off switch, zero-setting at any position
- reading switchable mm / inch
- data-hold, Preset function \pm
- max. sliding speed 1.5 m/sec.
- carbide tipped drawing point, interchangeable
- at „0“-position the drawing point coincides exactly with the base
- base made of stable cast iron, blue lacquered
- with battery 3 V (type CR 2032, art.-no.: 90112), with operation manual

Option

- data transfer via cable, art.-no.: 3420195, see page 334



ART NO	mm / inch	mm / inch	mm	mm	guide bar	mm	size of base	CC
340403	300 / 12	0.01 / 0.0005"	0.02	0.03	20 x 6	140 x 90 x 45	on request	

„Absolute“ Electr. Digital Height and Marking Gauge

- for standard workshop purposes
- with integrated Bluetooth® technology

- guide bar made of stainless steel
- with handwheel for quick adjustment and fine adjustment
- LCD display with clear reading, digit height 14 mm
- reading mm/inch, switchable, zero-setting at any position
- On/Off switch, hold function, with „ORIGIN“ system
- carbide tipped steel scriber, interchangeable, with racks feed
- at zero-position the drawing point coincides exactly with the base
- with built-in connector for external power supply
- with holder for clamping a dial gauge, massive Special cast iron base, lacquered
- with external digital input function for example digital gauges art. series 240250 – 240257
- incl. 1 x 3 V battery (type CR2032, art.-no. 90112), with operation manual

Option

- data transfer via Bluetooth®, art.-no.: 2023106 see page 334

Connections:
Mini-USB
Power Supply



application example

ART NO	mm / inch	mm / inch	mm	mm	guide bar	mm	size of base	CC
341215	300 / 12	0.01 / 0.0005	0.03	0.02	35 x 15	150 x 100 x 50	on request	
341216	600 / 24	0.01 / 0.0005	0.05	0.02	35 x 15	150 x 100 x 50	on request	

Height and Marking Gauges

Universal Height and Marking Gauge

• for standard workshop purposes

- guide bar made of special steel
- reading parts matt chrome finish, with fine adjustment
- at zero-position the scribe coincides exactly with the base
- carbide tipped steel scriber, exchangeable
- sturdy base, cast iron made, lacquered
- art.-no. 341113 – 341119 with magnifying glass



without magnifying glass



with magnifying glass




spare part - drawing point



spare part - drawing point



spare part - magnifying glass incl. frame



ART No	mm	mm	mm		mm	mm	CC
341110	300	0.02	0.04	X	20 x 6	110 x 65 x 32	on request
341111	500	0.02	0.05	X	28 x 8	150 x 110 x 50	on request
341113	300	0.02	0.04	✓	20 x 6	110 x 65 x 32	on request
341116	500	0.02	0.05	✓	35 x 12	170 x 110 x 50	on request

Digital Height and Marking Gauges, Surface Gauges

Electr. Digital Height and Marking Gauge

NEW




- with „ABSOLUTE“ system
- with data output, top-model

- stainless steel guideway, with fine adjustment
- LCD display with clear reading
- On/Off switch, zero-setting at any position
- reading switchable mm/inch
- tolerance setting, hold function
- presenting of measured values (\pm pre-set), measuring direction switchable
- carbide tipped drawing point, interchangeable
- base made of stable cast iron, grey lacquered
- incl. 1x 3 V battery (type CR 2032, art.-no.: 90112), with operating manual
- (other sizes available on request, 500, 800, 1500 and 2000 mm)

Options

- data transfer via cable, art.-no. 209001, see page 334

- HM-scriber
 - 0 – 300 mm (art.-no.: 341301-1)
 - 0 – 500, 0 – 600 mm (art.-no.: 341302-1)
 - 0 – 800, 0 – 1000, 0 – 1500, 0 – 2000 mm (art.-no.: 341304-1)
- holder for dial indicator
 - 0 – 300 mm (art.-no.: 341301-3)
 - 0 – 500, 0 – 600 mm (art.-no.: 341302-39)
 - 0 – 800, 0 – 1000, 0 – 1500, 0 – 2000 mm (art.-no.: 341304-3)



holder for dial indicator



ART NO

mm / inch

mm

mm

mm

mm

mm

size of base

ART NO	mm / inch	mm	mm	mm	guide bar	size of base	
341301	300 / 12	0.02	0.04	0.02	23 x 6	132 x 91 x 44	on request
341303	600 / 24	0.02	0.05	0.02	31 x 10.5	180 x 120 x 54	on request
341305	1000 / 40	0.02	0.07	0.02	50 x 16	250 x 150 x 73	on request

Parallel Surface Gauge

- for simple workshop purposes

- round, chromed column, without graduation
- hardened steel scribe, straight and cranked bar
- scribe is rotatable and turnable
- round and lacquered iron base



ART NO

342102

mm


300

342104

500

Accessories for Marking Gauges

Spare Parts for Height Gauges
and Height Marking Gauges



suitable for ART NO	ART NO	thread ø mm	base ø mm	ART NO	column ø x L mm	ART NO marking-needle with clamping	marking-needle with clamping ø x L mm
342102	3421021	8	80	3421022	10 x 300	3421023	5 x 150
342104	3421041	6	80	3421042	10 x 500	3421043	5 x 150

Follow us on Facebook.

Never miss any news about our products,
promotions and offers.



Any questions?
We are pleased to advise.

facebook.com/VogelGermany

Precision Inspection Square

DIN 875/0

- for inspection rooms and test laboratories

- stainless, hardened steel or made from special hardened steel
- extra fine ground
- flat or with back



Precision Inspection Square

DIN 875/1

- for precision machinery

- stainless, steel or made from special steel
- fine ground
- flat or with back



ART NO flat	→ mm ←	ART NO with back	→ mm ←	CC	wooden case	
					ART NO flat	ART NO with back
DIN 875/0 stainless steel					flat	with back
310000	50 x 40	310100	50 x 40	on request	3199050	3199051
310001	75 x 50	310101	75 x 50	on request	3199075	3199076
310002	100 x 70	310102	100 x 70	on request	3199100	3199101
310003	150 x 100	310103	150 x 100	on request	3199150	3199151
310004	200 x 130	310104	200 x 130	on request	3199200	3199201
310005	250 x 165	310105	250 x 165	on request	3199250	3199251
310006	300 x 200	310106	300 x 200	on request	3199300	3199301
DIN 875/0 carbon steel					flat	with back
310011	75 x 50	310111	75 x 50	on request	3199075	3199076
310012	100 x 70	310112	100 x 70	on request	3199100	3199101
310013	150 x 100	310113	150 x 100	on request	3199150	3199151
310014	200 x 130	310114	200 x 130	on request	3199200	3199201
310015	250 x 165	310115	250 x 165	on request	3199250	3199251
310016	300 x 200	310116	300 x 200	on request	3199300	3199301
DIN 875/1 stainless steel					flat	with back
310021	75 x 50	310121	75 x 50	on request	3199075	3199076
310022	100 x 70	310122	100 x 70	on request	3199100	3199101
310023	150 x 100	310123	150 x 100	on request	3199150	3199151
310024	200 x 130	310124	200 x 130	on request	3199200	3199201
310025	250 x 165	310125	250 x 165	on request	3199250	3199251
310026	300 x 200	310126	300 x 200	on request	3199300	3199301
310026-1	400 x 265	310126-1	400 x 265	on request	3199400	3199401
310027	500 x 330	310127	500 x 330	on request	3199500	3199501
310027-1	600 x 400	310127-1	600 x 400	on request	3199600	3199761
310028	750 x 500	310128	750 x 500	on request	3199750	3199751
310029	1000 x 660	310129	1000 x 660	on request	3199990	3199991
DIN 875 GG 1 carbon steel					flat	with back
310041	75 x 50	310141	75 x 50	on request	3199075	3199076
310042	100 x 70	310142	100 x 70	on request	3199100	3199101
310043	150 x 100	310143	150 x 100	on request	3199150	3199151
310044	200 x 130	310144	200 x 130	on request	3199200	3199201
310045	250 x 165	310145	250 x 165	on request	3199250	3199251
310046	300 x 200	310146	300 x 200	on request	3199300	3199301
310046-1	400 x 265	310146-1	400 x 265	on request	3199400	3199401
310047	500 x 330	310147	500 x 330	on request	3199500	3199501
310047-1	600 x 400	310147-1	600 x 400	on request	3199600	3199761
310048	750 x 500	310148	750 x 500	on request	3199750	3199751
310049	1000 x 660	310149	1000 x 660	on request	3199990	3199991
310049-1	1500 x 1000	310149-1	1500 x 1000	on request	—	—

Precision Squares

Precision Workshop Squares

DIN 875/2

• for standard machinery

- stainless or carbon steel, at your choice
- fine ground
- flat or with back



DIN

ART NO
flat

→ [mm] ←

ART NO
with back

→ [mm] ←

CC

DIN 875/2 stainless steel

310071	75 x 50	310171	75 x 50	on request
310072	100 x 70	310172	100 x 70	on request
310073	150 x 100	310173	150 x 100	on request
310074	200 x 130	310174	200 x 130	on request
310075	250 x 165	310175	250 x 165	on request
310076	300 x 175	310176	300 x 175	on request
310076-1	400 x 200	310176-1	400 x 200	on request
310077	500 x 250	310177	500 x 250	on request
310077-1	600 x 300	310177-1	600 x 300	on request
310078	750 x 375	310178	750 x 375	on request
310079	1000 x 500	310179	1000 x 500	on request
310079-1	1500 x 750	310179-1	1500 x 750	on request
310079-2	2000 x 1000	310179-2	2000 x 1000	on request

DIN 875/2 carbon steel

310061	75 x 50	310161	75 x 50	on request
310062	100 x 70	310162	100 x 70	on request
310063	150 x 100	310163	150 x 100	on request
310064	200 x 130	310164	200 x 130	on request
310065	250 x 165	310165	250 x 165	on request
310066	300 x 175	310166	300 x 175	on request
310066-1	400 x 200	310166-1	400 x 200	on request
310067	500 x 250	310167	500 x 250	on request
310067-1	600 x 300	310167-1	600 x 300	on request
310068	750 x 375	310168	750 x 375	on request
310069	1000 x 500	310169	1000 x 500	on request
310069-1	1500 x 750	310169-1	1500 x 750	on request
310069-2	2000 x 1000	310169-2	2000 x 1000	on request

Bevel Edge Squares and Knife Straight Edges

Precision Bevel Edge Square

DIN 875/00

• for testing according to the light-gap method

- stainless steel or carbon steel, at your choice
- hardened and fine ground
- with two bevelled edges, finely ground and lapped
- flat or with back

ART No 310221 – 310225



ART No 310201



DIN

ART No
flat

→ mm ←

ART No
with back

→ mm ←

CC

stainless steel

310201	50 x 40	310221	50 x 40	on request
310202	75 x 50	310222	75 x 50	on request
310203	100 x 70	310223	100 x 70	on request
310204	150 x 100	310224	150 x 100	on request
310205	200 x 130	310225	200 x 130	on request
carbon steel				
310211	50 x 40	—	—	on request
310212	75 x 50	—	—	on request
310213	100 x 70	—	—	on request
310214	150 x 100	—	—	on request
310215	200 x 130	—	—	on request

Precision Knife Straight Edge

DIN 874/00

• for testing according to the light-gap method

- stainless steel, anti-glare matt chromed, hardened and fine ground
- carbon steel, with burnished edges, hardened and fine ground
- bevelled edges finely ground and lapped
- with insulation handle

ART No 310323



Vogel Standard

ART No 310303



Vogel Standard INOX



DIN

ART No
stainless

→ mm ←

ART No
carbon steel

→ mm ←

CC

310302	75	310322	75	on request
310303	100	310323	100	on request
310304	125	310324	125	on request
310305	150	310325	150	on request
310306	200	310326	200	on request
310307	250	310327	250	on request
310308	300	310328	300	on request
310310	400	310329	400	on request
310311	500	310330	500	on request
310312	600	310331	600	on request
310313	750	310332	750	on request
310314	1000	310333	1000	on request
310315	1250	310334	1250	on request
310316	1500	310335	1500	on request

Squares

Square with Inside Bevelled Edge

DIN 875/00

- stainless steel
- hardened and fine ground
- bevelled edge finely ground and lapped



INOX DIAMOND DIN


ART NO	square	→ mm ←		CC	ART NO wooden box
		long blade	short blade		
310231	25 x 20	6.0 x 3.5	5.0 x 3.5	on request	3199050
310232	40 x 28	8.0 x 3.5	5.0 x 3.5	on request	3199050

Toolmaker Square Set

DIN 875/00

contents:

- knife straight edge, stainless steel, hardened, DIN 874/00, length 100 mm
- square with inside bevelled edge, stainless, hardened, DIN 875/00, size 25 x 20 mm
- square with inside bevelled edge, stainless, hardened, DIN 875/00, size 40 x 28 mm
- square with bevelled edges, stainless, hardened, DIN 875/00, size 75 x 50 mm
- steel scriber point, size 60 x 9 x 9 mm

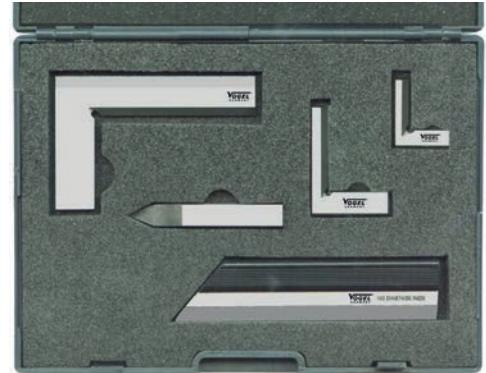


INOX DIAMOND DIN

ART NO

310229

Explore our
Website.

www.vogel-germany.de

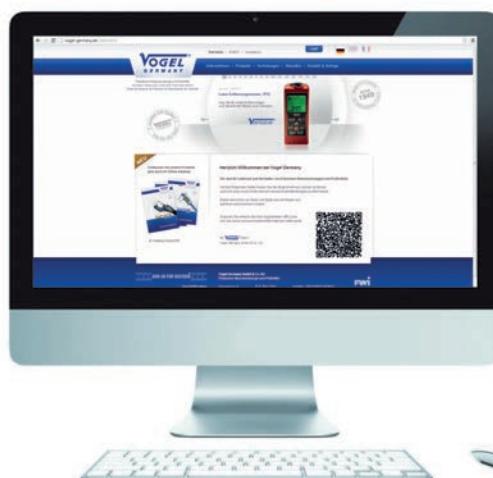

VOGEL
GERMANY
Measuring Solutions

Any questions?

We are pleased to advise.

Workshop Square

- for locksmith, workshop use, mechanics, training, etc.
- special steel, galvanized finish
- flat or with back



ART No flat	mm
312453	100 x 70
312454	150 x 100
312455	200 x 130
312456	250 x 160
312457	300 x 180
312458	400 x 230
312459	500 x 280
312460	600 x 330
312461	750 x 375
312462	1000 x 500
312464	1500 x 750
312465	2000 x 1000

ART No with back	mm
312473	100 x 70
312474	150 x 100
312475	200 x 130
312476	250 x 160
312477	300 x 180
312478	400 x 230
312479	500 x 280
312480	600 x 330
312481	750 x 375
312482	1000 x 500
312484	1500 x 750
312485	2000 x 1000

Mechanic Square

- with heavy base and thin blade
- special carbon steel, fine ground
- workshop grade with chromed base, fine ground blade
- DIN quality with fine polished surfaces



ART No workshop grade	mm
312370	67 x 58
312373	118 x 73
312374	170 x 100
312375	220 x 115
312376	270 x 135
312377	320 x 150




ART No DIN 875 GG I	mm
312310	75 x 50
312313	100 x 70
312314	150 x 100
312315	200 x 130
312316	250 x 160
312317	300 x 175

ART No DIN 875 GG II	mm
312350	75 x 50
312353	100 x 70
312354	150 x 100
312355	200 x 130
312356	250 x 160
312357	300 x 175
312358	400 x 250
312359	500 x 250

Squares

Flange Square

- for fitters and pipeline constructions
- to adjust the flange
- steel, galvanized finish

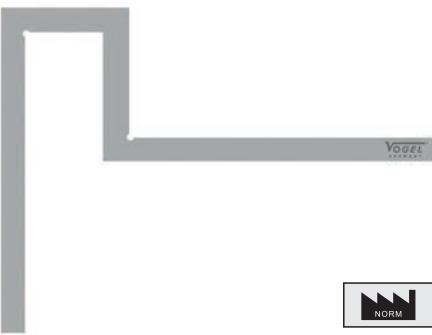

ART No

	A x B x C x D	steel blade mm
312511	300 x 300 x 105 x 65	30 x 6
312512	400 x 400 x 115 x 65	30 x 6
312513	500 x 500 x 125 x 70	30 x 6
312514	600 x 500 x 125 x 70	30 x 6
312515	800 x 500 x 125 x 95	30 x 6
312516	1000 x 500 x 125 x 95	30 x 6

Carpenter's Square

- stainless, spring steel
- with or without marking holes, at your choice
- art.-no. 521123 – 521126 yellow,
powder coated surface,
with cm graduation and marking holes



ART No 521123



ART No 521111



ART No
with marking holes

ART No
yellow,
with marking holes

→ mm ←

		steel blade mm
521111	—	35 x 1.5
521112	—	35 x 1.5
521113	521123	35 x 1.5
521114	521124	35 x 1.5
521116	521126	35 x 1.5

VOGEL
GERMANY
Measuring Solutions

Send us a
partnership request



OXOMI.com

OXOMI[®]


Complete catalogue
assortment searchable
on OXOMI.com

Universal Square

- with hardened aluminium blade (HRB 70) and elocated aluminium handle
- for general carpentry and metal work, etc.
- with black anodized aluminium blade, non glare reading
- anodised aluminium handle with profile grooves
- with 45° mitre
- graduation on front- and rear side
- laser engraved scale for clear reading

graduation at type B = mm - mm / mm - mm

graduation at type C = mm - mm / inch - inch

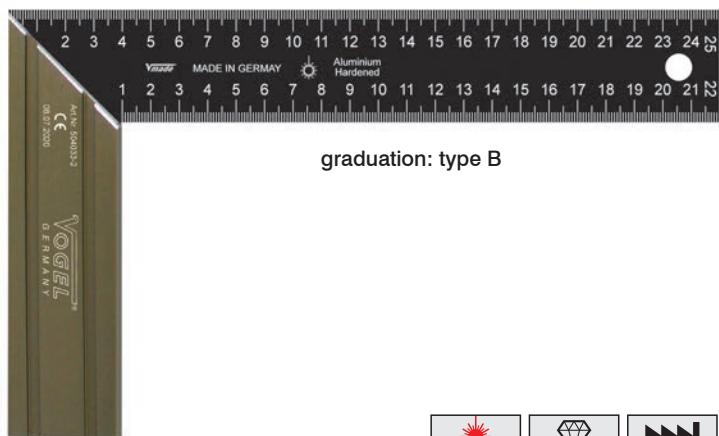

graduation: type B



ART NO type B	→ mm ←	ART NO type C	→ mm ← mm / inch	length of handle mm	aluminium handle mm	aluminium blade mm
504031-2	150	504051-2	150 / 6	130	40 x 12	40 x 2.0
504032-2	200	504052-2	200 / 8	130	40 x 12	40 x 2.0
504033-2	250	504053-2	250 / 10	145	40 x 12	40 x 2.0
504034-2	300	504054-2	300 / 12	145	40 x 12	40 x 2.0
504036-2	400	504056-2	400 / 16	170	40 x 12	40 x 2.0
504037-2	500	504057-2	500 / 20	170	40 x 12	40 x 2.0

Combination Square-Set

- with protractor and center head
- for carpenters, wood workers and mechanics, etc.

- stainless steel blade, etched graduation in mm/inch, double-sided
- square head, protractor and center head made from alloy casting, powder coated
- smoothly processed surfaces
- with steel scriber and vial





ART NO	→ mm ←	garduation	→ mm ←	square	blade
508090	300 / 12	mm - mm / inch + inch	110 x 90 x 17.5	25.4 x 1.8	

Squares

Center Square

- for marking centers on round discs and shafts

- made of Dur-Aluminium, surface hardened HRC63
- scratch-resistant, black anodized surface
- laser engraved, clear reading scale, with mm graduation

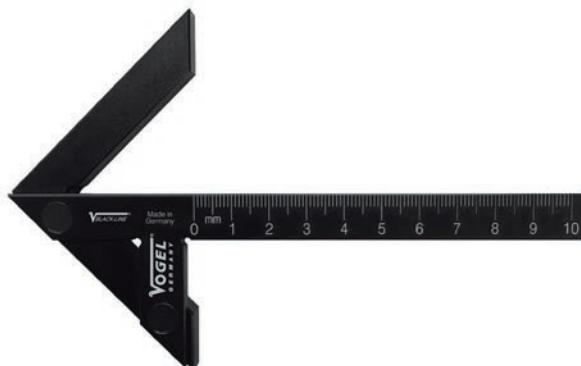

ART N°

—|————| mm

for shaft- \varnothing
mm

ART N°	— ———— mm	for shaft- \varnothing mm
312541	100 x 70	90
312542	150 x 130	190
312543	200 x 150	220
312544	250 x 160	230
312545	300 x 180	280
312546	400 x 250	380
312547	500 x 330	530

Center Square

DIN 875/1

- for marking centers on round discs and shafts

- special steel, chromed finish
- scale in matt chrome finish, with mm graduation



ART N°

—|————| mm

for shaft- \varnothing
mm

ART N°	— ———— mm	for shaft- \varnothing mm
312531	100 x 70	90
312532	150 x 130	190
312533	200 x 150	220
312534	250 x 160	230
312535	300 x 180	280
312536	400 x 250	380
312537	500 x 330	530

Bevel Square

- for general carpentry and metal work, etc.

- steel blade and carbon or stainless steel, cross section 29 x 1.6 mm
- anodised aluminium handle with profile grooves, cross section 30 x 11.5 mm
- with or without angle graduation on the handle, at your choice
- with galvanized fixing screw for locking the steel blade



ART NO	ART NO	ART NO	ART NO	
w/o angle graduation, carbon steel blade	with angle graduation, carbon steel blade	w/o angle graduation, stainless steel blade	with angle graduation, stainless steel blade	mm
504802	504852	504812	504862	200
504803	504853	504813	504863	250
504804	504854	504814	504864	300

Mitre Square

- with hardened aluminium blade (HRB 70) and anodised aluminium handle
- for standard joiners' and carpenters' purpose

- blade made of black anodized aluminium
- anodised aluminium handle with profile grooves
- with 45° and 135° angular



ART NO		aluminium handle mm	aluminium blade mm
504903-2	250	40 x 12	40 x 2
504904-2	300	40 x 12	40 x 2

Our new slogan:
Measuring Solutions

- ✓ more appropriate
- ✓ more meaningful
- ✓ more contemporary

This stands for the further development of the brand Vogel Germany to even more customer-oriented solutions in the measurement technology, development of the range, consulting, training, etc.



Squares

Acute Angle Square 120° and 135°

DIN 875/2

- stainless steel, flat or with back
- for standard machinery purpose
- edges and sides fine ground



INOX **DIN**

ART No flat 120°	→ mm	CC
314050	50 x 50	on request
314051	75 x 75	on request
314052	100 x 100	on request
314053	125 x 125	on request

ART No with back 135°	→ mm	CC
314080	100 x 70	on request
314081	120 x 80	on request
314082	150 x 100	on request
314083	200 x 130	on request

Acute Angle Square 120° and 135°

DIN 875/2

- carbon steel, flat or with back
- for standard machinery purpose
- edges and sides fine ground



DIN

ART No flat 120°	ART No flat 135°	→ mm	CC
313050	313060	50 x 50	on request
313051	313061	75 x 75	on request
313052	313062	100 x 100	on request
313053	313063	125 x 125	on request
313054	313064	150 x 150	on request
313055	313065	200 x 200	on request

ART No with back 135°	→ mm	CC
313080	100 x 70	on request
313081	120 x 80	on request
313082	150 x 100	on request
313083	200 x 130	on request
—	—	—
—	—	—

Acute Angle Square 45° and 60°

DIN 875/2

- stainless steel, flat or with back
- for standard machinery purpose
- edges and sides fine ground




INOX **DIN**

ART No flat 45°	ART No with back 45°	ART No flat 60°	ART No with back 60°	→ mm	CC
314001	314021	314011	314031	100 x 70	on request
314002	314022	314012	314032	120 x 80	on request
314003	314023	314013	314033	150 x 100	on request
314004	314024	314014	314034	200 x 130	on request

Acute Angle Square 45° and 60°

DIN 875/2

- carbon steel, flat or with back
- for standard machinery purpose
- edges and sides fine ground

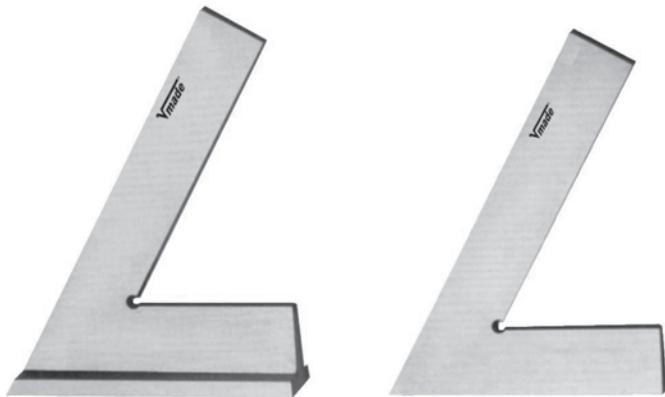

DIN

ART NO flat 45°	ART NO with back 45°	ART NO flat 60°	ART NO with back 60°	mm	CC
313001	313021	313011	313031	100 x 70	on request
313002	313022	313012	313032	120 x 80	on request
313003	313023	313013	313033	150 x 100	on request
313004	313024	313014	313034	200 x 130	on request


Bevel Square

- rugged construction
- for metalworker, fitters, locksmith, etc.
- special steel, galvanized finish
- with galvanized fixing screw for locking the steel blade




NORM

ART NO	mm	blade mm	handle mm
312571	100	20 x 2.5	20 x 8.0
312572	150	20 x 2.5	20 x 8.0
312573	200	20 x 2.5	20 x 8.0
312574	250	20 x 2.0	20 x 8.0
312575	300	20 x 2.0	20 x 8.0
312576	400	20 x 2.0	20 x 8.0
312577	500	20 x 2.0	20 x 8.0

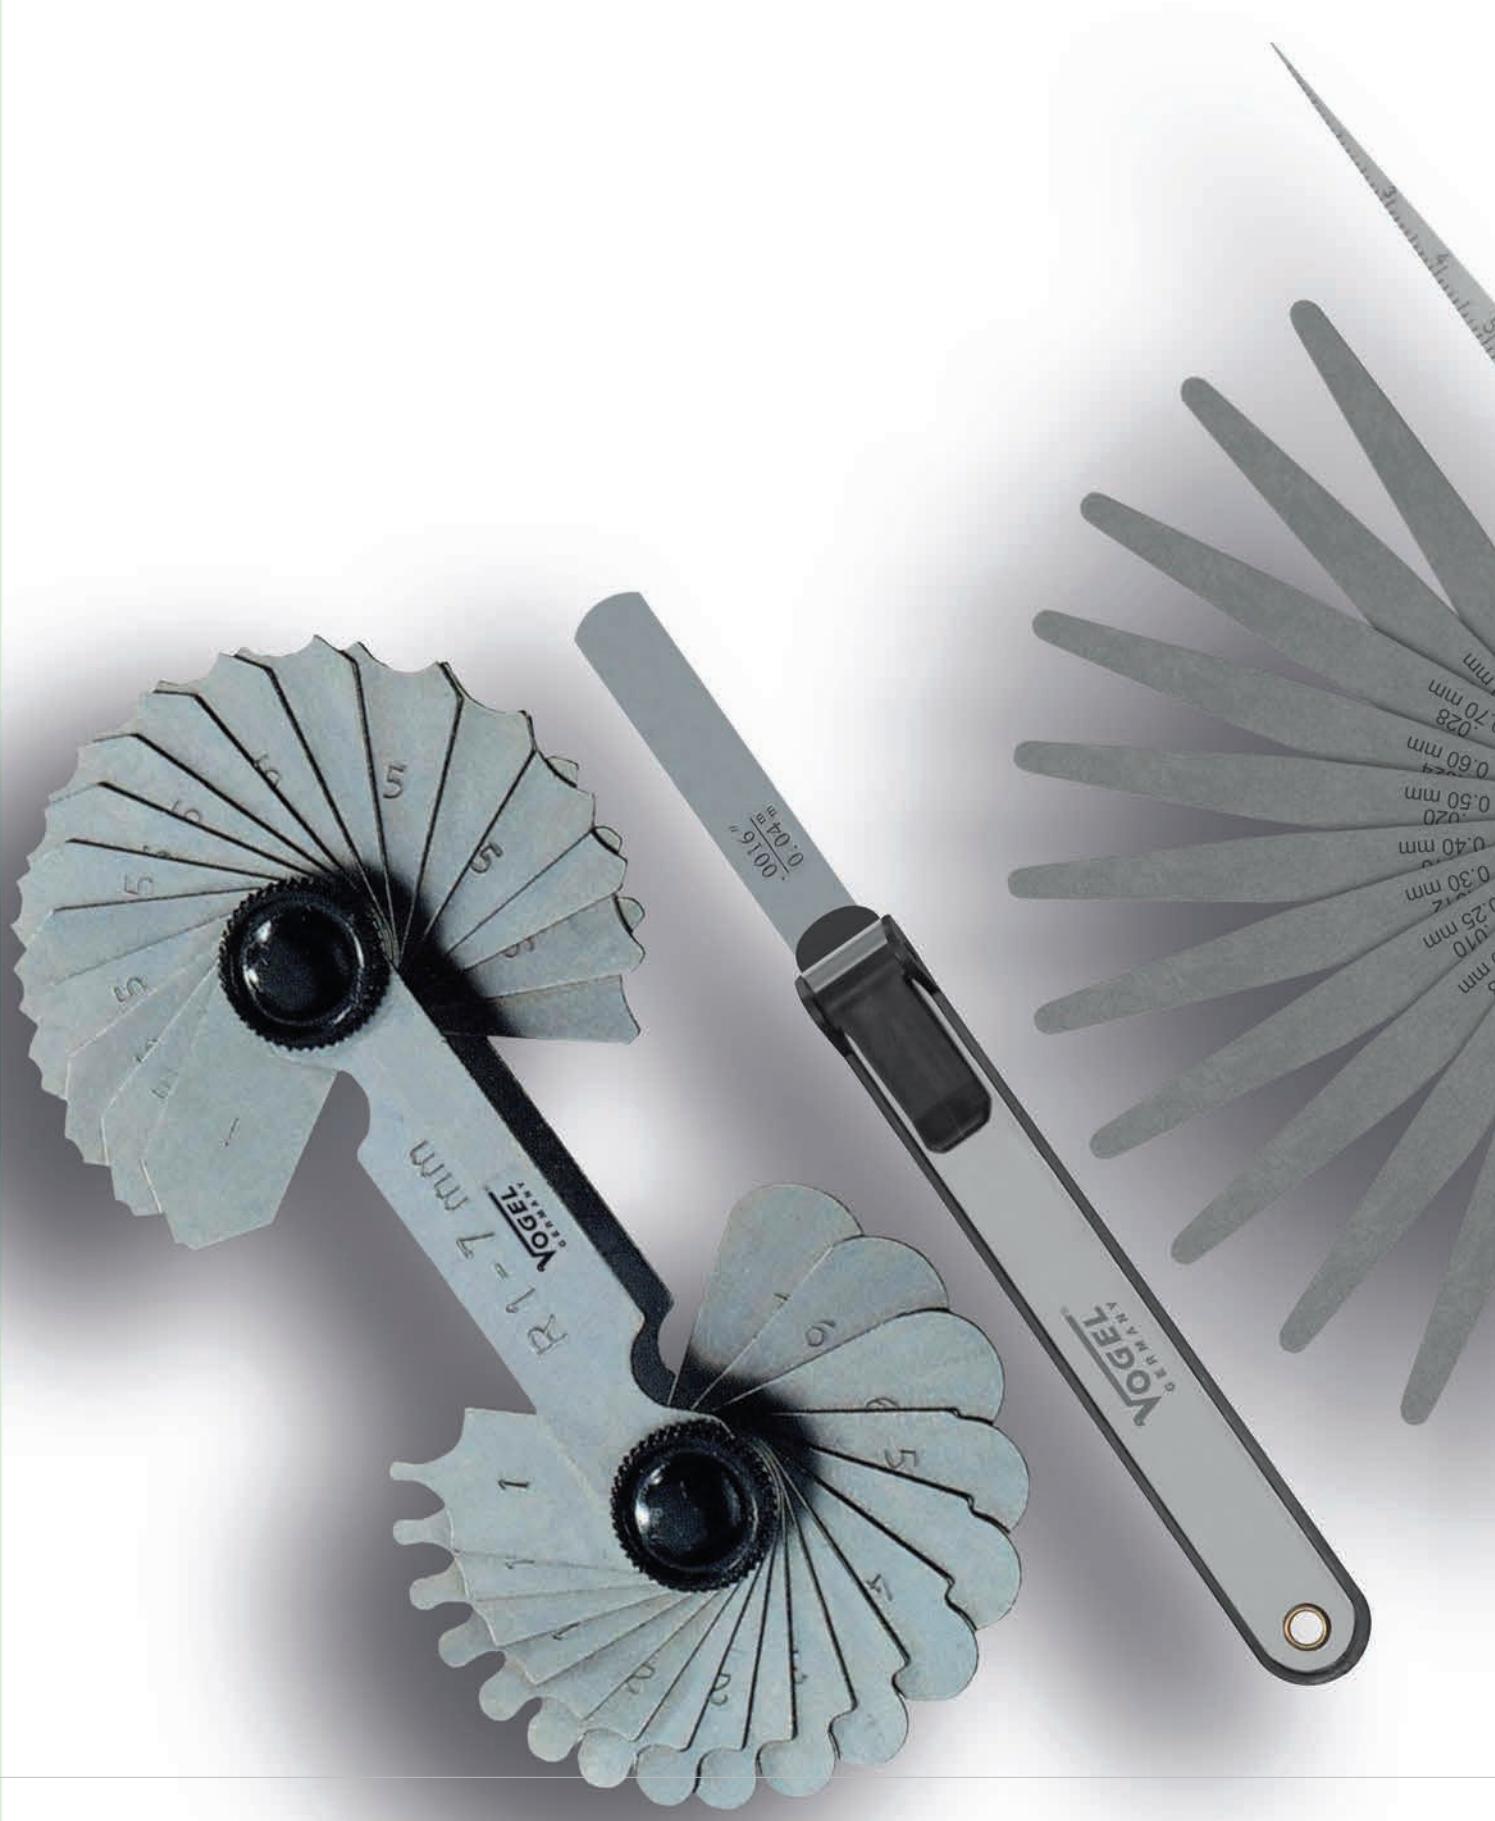

Test Equipment

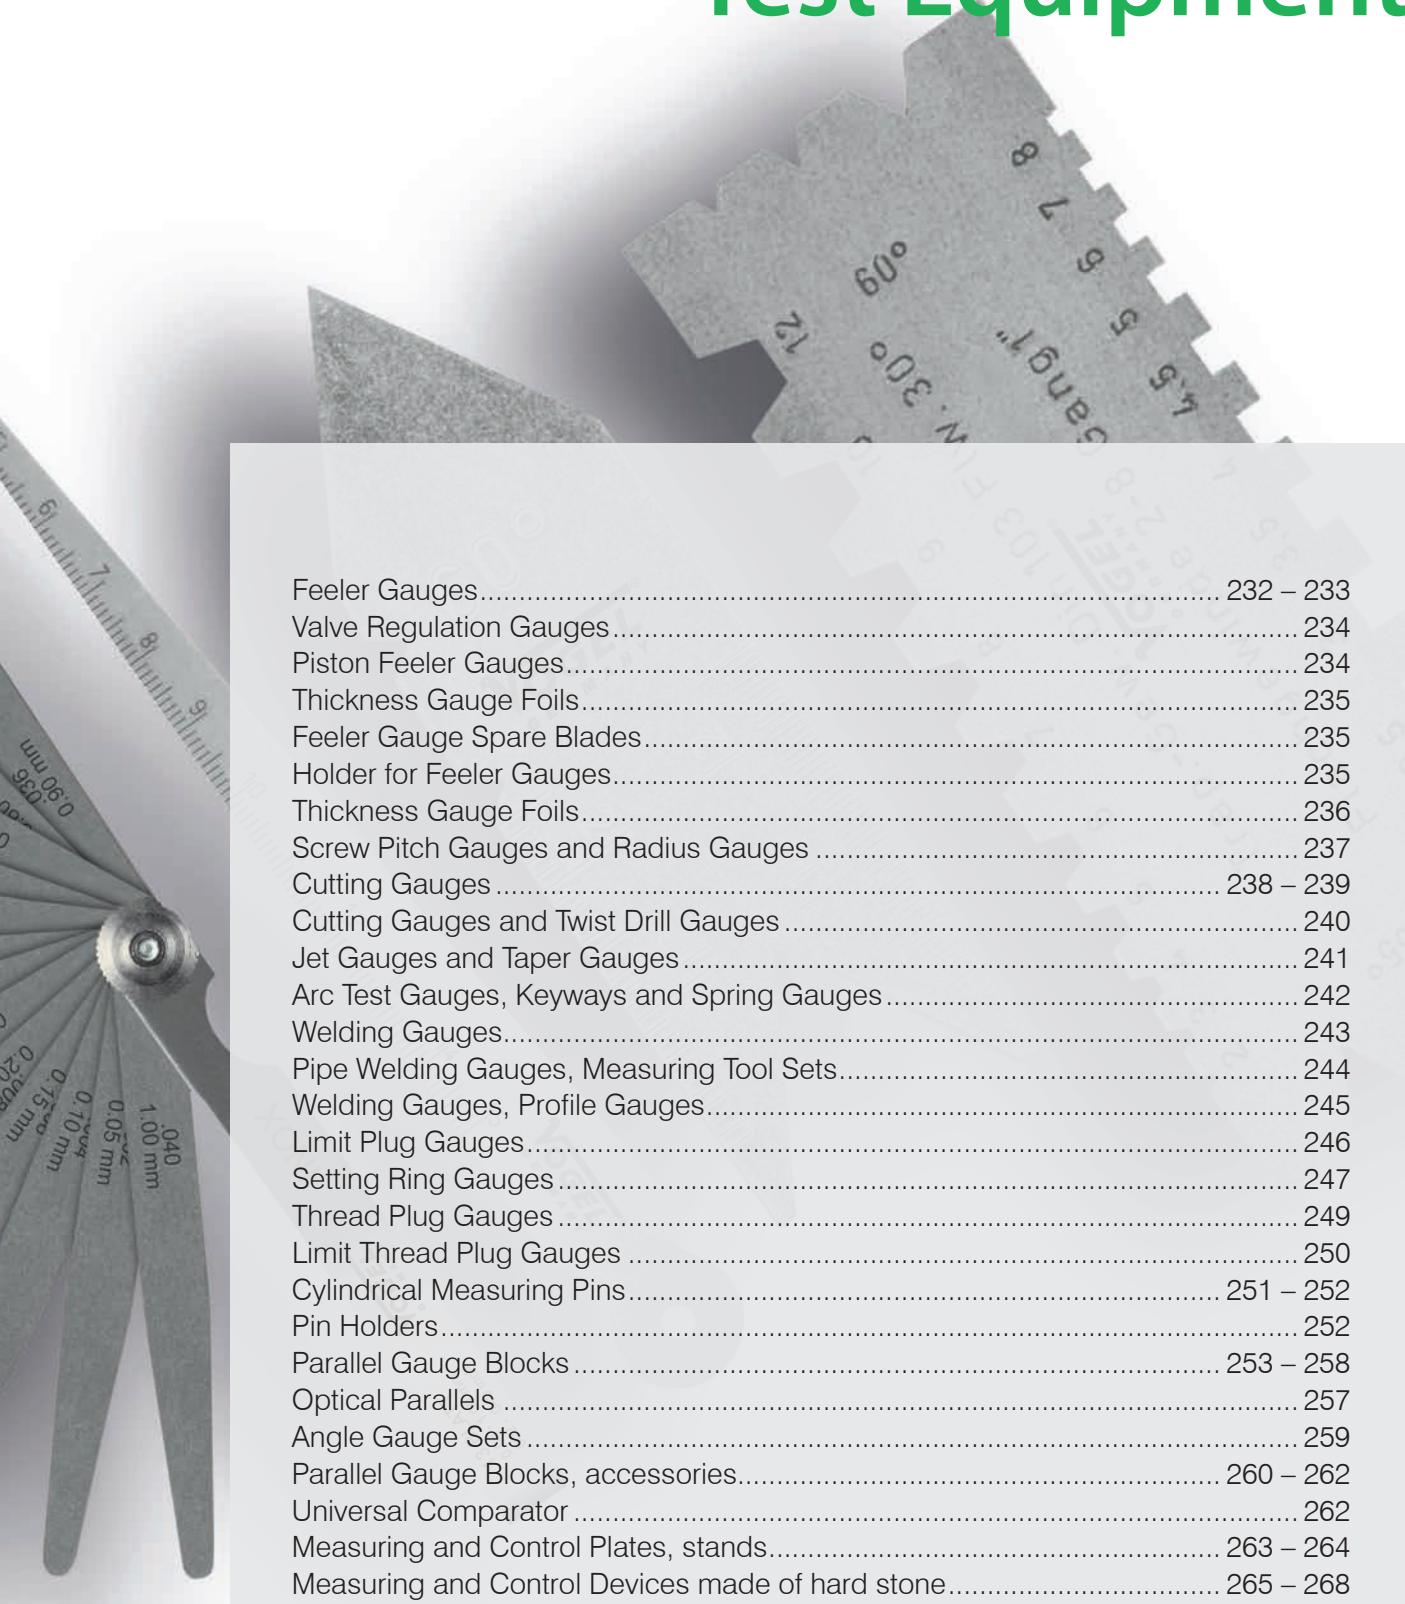

Feeler Gauges.....	232 – 233
Valve Regulation Gauges	234
Piston Feeler Gauges.....	234
Thickness Gauge Foils.....	235
Feeler Gauge Spare Blades.....	235
Holder for Feeler Gauges.....	235
Thickness Gauge Foils.....	236
Screw Pitch Gauges and Radius Gauges	237
Cutting Gauges	238 – 239
Cutting Gauges and Twist Drill Gauges	240
Jet Gauges and Taper Gauges	241
Arc Test Gauges, Keyways and Spring Gauges	242
Welding Gauges.....	243
Pipe Welding Gauges, Measuring Tool Sets.....	244
Welding Gauges, Profile Gauges.....	245
Limit Plug Gauges.....	246
Setting Ring Gauges	247
Thread Plug Gauges	249
Limit Thread Plug Gauges	250
Cylindrical Measuring Pins.....	251 – 252
Pin Holders.....	252
Parallel Gauge Blocks	253 – 258
Optical Parallels	257
Angle Gauge Sets	259
Parallel Gauge Blocks, accessories.....	260 – 262
Universal Comparator	262
Measuring and Control Plates, stands.....	263 – 264
Measuring and Control Devices made of hard stone.....	265 – 268
Straightening Plates, stands	268
Lapping-, Control-, Surface and Testing Plates	269
Angle Plates	270
Precision Inspection Frames.....	271 – 272
Precision and Parallel Supports	273

Image Directory • Test Equipment





				
Page 232	Page 232	Page 233	Page 233	Page 234
				
Page 234	Page 234	Page 235	Page 235	Page 235
				
Page 235	Page 235	Page 236	Page 236	Page 237
				
Page 237	Page 237	Page 237	Page 238	Page 238
				
Page 238	Page 238	Page 238	Page 238	Page 239
				
Page 239	Page 239	Page 239	Page 239	Page 240
				
Page 240	Page 240	Page 240	Page 240	Page 241

Image Directory • Test Equipment


				
Page 241	Page 241	Page 241	Page 241	Page 241
				
Page 242	Page 242	Page 242	Page 243	Page 243
				
Page 243	Page 243	Page 244	Page 244	Page 245
				
Page 245	Page 246	Page 247	Page 248	Page 249
				
Page 249	Page 249	Page 249	Page 250	Page 251
				
Page 251	Page 251	Page 252	Page 255	Page 255
				
Page 256	Page 256	Page 257	Page 257	Page 258

Image Directory • Test Equipment




				
Page 258	Page 258	Page 259	Page 260	Page 260
				
Page 260	Page 260	Page 260	Page 260	Page 260
				
Page 261	Page 261	Page 261	Page 261	Page 261
				
Page 261	Page 261	Page 262	Page 262	Page 262
				
Page 262	Page 263	Page 264	Page 265	Page 265
				
Page 265	Page 266	Page 266	Page 266	Page 267
				
Page 267	Page 267	Page 268	Page 268	Page 269

Image Directory • Test Equipment

				
Page 269	Page 269	Page 270	Page 270	Page 271
				
Page 271	Page 271	Page 272	Page 272	Page 273
				
Page 273				

Precision Feeler Gauge Sets

Precision Feeler Gauge Sets

tolerance acc. to T3 (DIN 2275)

- high tolerance accuracy for precise measurements

- hardened spring steel, conical shaped blades, 100 mm length
- nickel plated case, riveted
- sizes in mm on each blade
- thickness tolerance in relation to the metric sizes



T3

ART NO	quantity of blades	mm	composition	CC
400101-2	8	0.05 – 0.50	0.05 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.40 / 0.50 mm	on request
400105-2	13	0.05 – 1.00	0.05 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.40 / 0.50 / 0.60 / 0.70 / 0.80 / 0.90 / 1.00 mm	on request
400107-2	20	0.05 – 1.00	0.05 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.35 / 0.40 / 0.45 / 0.50 / 0.55 / 0.60 / 0.65 / 0.70 / 0.75 / 0.80 / 0.85 / 0.90 / 0.95 / 1.00 mm	on request

Feeler Gauge Sets


tolerance acc. to T2

- for standard purposes, like thickness measuring between narrow slots and for automotive- and engine industry

- hardened spring steel, conical shaped blades, 100 mm length
- nickel plated case with lock nut, sizes in mm and inch on each blade
- thickness tolerance in relation to the metric sizes



Other sets are available
on request!

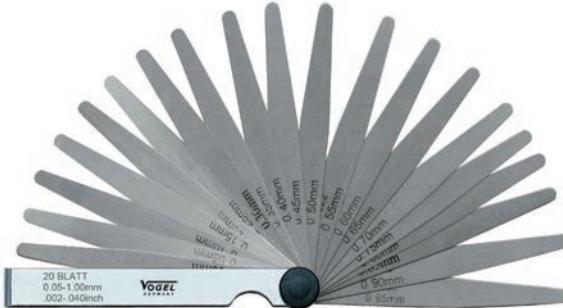

T2

ART NO	quantity of blades	mm / inch	composition	CC
411000	8	0.03 – 0.10 .0012 – .004	0.03 / 0.04 / 0.05 / 0.06 / 0.07 / 0.08 / 0.09 / 0.10 mm .0012 / .0016 / .002 / .0024 / .0028 / .003 / .0035 / .004 inch	on request
411001	8	0.05 – 0.50 .002 – .020	0.05 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.40 / 0.50 mm .002 / .004 / .006 / .008 / .010 / .012 / .016 / .020 inch	on request
411003	10	0.05 – 0.80 .002 – .032	0.05 / 0.10 / 0.15 / 0.20 / 0.30 / 0.40 / 0.50 / 0.60 / 0.70 / 0.80 mm .002 / .004 / .006 / .008 / .012 / .016 / .020 / .024 / .028 / .032 inch	on request
411004	10	0.03 – 0.50 .0012 – .020	0.03 / 0.04 / 0.05 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.40 / 0.50 mm .0012 / .0016 / .002 / .004 / .006 / .008 / .010 / .012 / .016 / .020 inch	on request
412002	10	0.038 – 0.63 .0015 – .025	0.038 / 0.05 / 0.08 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.38 / 0.63 mm .0015 / .002 / .003 / .004 / .006 / .008 / .010 / .012 / .015 / .025 inch	on request
411005	13	0.05 – 1.00 .002 – .040	0.05 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.40 / 0.50 / 0.60 / 0.70 / 0.80 / 0.90 / 1.00 mm .002 / .004 / .006 / .008 / .010 / .012 / .016 / .020 / .024 / .028 / .032 / .036 / .040 inch	on request
412005	13	0.05 – 0.88 .002 – .035	0.05 / 0.08 / 0.10 / 0.12 / 0.15 / 0.20 / 0.25 / 0.30 / 0.38 / 0.50 / 0.63 / 0.75 / 0.88 mm .002 / .003 / .004 / .005 / .006 / .008 / .010 / .012 / .015 / .020 / .025 / .030 / .035 inch	on request
411007	20	0.05 – 1.00 .002 – .040	0.05 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.35 / 0.40 / 0.45 / 0.50 / 0.55 / 0.60 / 0.65 / 0.70 / 0.75 / 0.80 / 0.85 / 0.90 / 0.95 / 1.00 mm .002 / .004 / .006 / .008 / .010 / .012 / .014 / .016 / .018 / .020 / .022 / .024 / .026 / .028 / .030 / .032 / .034 / .036 / .038 / .040 inch	on request
411008	21	0.10 – 0.50	0.10 / 0.12 / 0.14 / 0.16 / 0.18 / 0.20 / 0.22 / 0.24 / 0.26 / 0.28 / 0.30 / 0.32 / 0.34 / 0.36 / 0.38 / 0.40 / 0.42 / 0.44 / 0.46 / 0.48 / 0.50 mm	on request
411009	21	0.05 – 2.00	0.05 / 0.10 / 0.20 / 0.30 / 0.40 / 0.50 / 0.60 / 0.70 / 0.80 / 0.90 / 1.00 / 1.10 / 1.20 / 1.30 / 1.40 / 1.50 / 1.60 / 1.70 / 1.80 / 1.90 / 2.00 mm	on request
411010	26	0.03 – 1.00	0.03 / 0.04 / 0.05 / 0.06 / 0.07 / 0.08 / 0.09 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.35 / 0.40 / 0.45 / 0.50 / 0.55 / 0.60 / 0.65 / 0.70 / 0.75 / 0.80 / 0.85 / 0.90 / 0.95 / 1.00 mm	on request
411011	32	0.03 – 1.00 .0012 – .040	0.03 / 0.04 / 0.05 / 0.06 / 0.07 / 0.075 / 0.08 / 0.09 / 0.10 / 0.12 / 0.15 / 0.18 / 0.20 / 0.22 / 0.25 / 0.28 / 0.30 / 0.32 / 0.35 / 0.40 / 0.45 / 0.50 / 0.55 / 0.60 / 0.65 / 0.70 / 0.75 / 0.80 / 0.85 / 0.90 / 0.95 / 1.00 mm	on request
411012	14	0.03 – 1.00	0.03 / 0.05 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.40 / 0.50 / 0.60 / 0.70 / 0.80 / 0.90 / 1.00 mm	on request


Precision Feeler Gauge Sets

Feeler Gauge Set, stainless steel

tolerance acc. to T2

- stainless steel made

- blades made from stainless steel, hard rolled out
- conical shaped blades, 100 mm length
- nickel plated case with lock nut
- sizes in mm and inch on each blade
- thickness tolerance in relation to the metric sizes

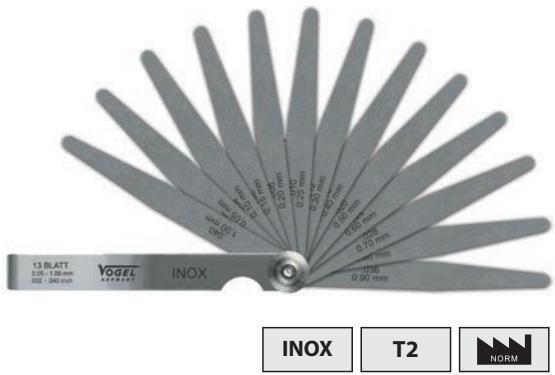

INOX

T2


NORM

ART NO	quantity of blades	mm / inch	composition	CC
413101	8	0.05 – 0.50 .002 – .020	0.05 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.40 / 0.50 mm .002 / .004 / .006 / .008 / .010 / .012 / .016 / .020 inch	on request
413105	13	0.05 – 1.00 .002 – .040	0.05 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.40 / 0.50 / 0.60 / 0.70 / 0.80 / 0.90 / 1.00 mm .002 / .004 / .006 / .008 / .010 / .012 / .016 / .020 / .024 / .028 / .032 / .036 / .040 inch	on request
413107	20	0.05 – 1.00 .002 – .040	0.05 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.35 / 0.40 / 0.45 / 0.50 / 0.55 / 0.60 / 0.65 / 0.70 / 0.75 / 0.80 / 0.85 / 0.90 / 0.95 / 1.00 mm .002 / .004 / .006 / .008 / .010 / .012 / .014 / .016 / .018 / .020 / .022 / .024 / .026 / .028 / .030 / .032 / .034 / .036 / .038 / .040 inch	on request

Feeler Gauge Set, made from brass

- anti-magnetic gauge, for electronical services

- blades made from brass
- conical shaped blades, 100 mm length
- brass case with lock nut
- sizes in mm on each blade

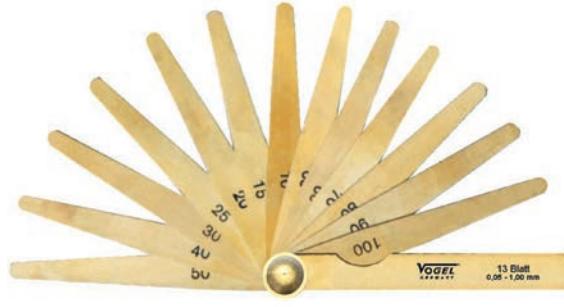

NORM

ART NO	quantity of blades	cover blade	mm	composition	CC
414105	13	brass	0.05 – 1.00	0.05 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.40 / 0.50 / 0.60 / 0.70 / 0.80 / 0.90 / 1.00 mm	on request
414107	20	brass	0.05 – 1.00	0.05 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.35 / 0.40 / 0.45 / 0.50 / 0.55 / 0.60 / 0.65 / 0.70 / 0.75 / 0.80 / 0.85 / 0.90 / 0.95 / 1.00 mm	on request

PERMISSIBLE TOLERANCES FOR SPRING BAND STEEL, HARDENED

nominal thickness mm	T2 (A2) +/- mm	T3 (A3) +/- mm
0.03 / 0.04 / 0.05 / 0.06	0.004	0.003
0.07 / 0.08 / 0.09 / 0.10	0.005	0.004
0.11 / 0.12 / 0.13	0.005	—
0.14 / 0.15	0.006	0.005
0.16 / 0.18	0.007	—
0.20	0.008	0.006
0.22 / 0.24	0.008	—
0.25	0.009	0.006
0.28	0.009	—

nominal thickness mm	T2 (A2) +/- mm	T3 (A3) +/- mm
0.30	0.009	0.007
0.35	0.011	0.007
0.40 / 0.45	0.012	0.008
0.50 / 0.55	0.014	0.009
0.60 / 0.65	0.014	0.009
0.70 / 0.75	0.017	0.012
0.80 / 0.85	0.019	0.013
0.90 / 0.95	0.022	0.014
1.00	0.024	0.016

nominal thickness mm	T2 (A2) +/- mm	T3 (A3) +/- mm
1.10	0.024	0.017
1.20	0.024	0.018
1.30	0.028	0.019
1.40	0.028	0.021
1.50	0.028	0.022
1.60	0.033	0.023
1.70	0.033	0.024
1.80	0.033	0.026
1.90	0.035	0.027
2.00	0.035	0.028

Feeler Gauge Sets and Piston Gauge Sets

Valve Regulation Gauge Set

tolerance acc.to T2

- for adjusting of valves

- blades made from hardened spring steel
- cylindrical shaped blades, 75 mm length, 9 mm width
- fixed by a brass rivet
- sizes in mm and inch on each blade
- delivery bulk packed or in foil
- thickness tolerance in relation to the metric sizes



ART NO singly packed	ART NO bulk packed	quantity of blades	mm / inch	composition
415106	4151061	6	0.10 – 0.40 .004 – .016	0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.40 mm .004 / .006 / .008 / .010 / .012 / .016 inch
415107	4151071	7	0.10 – 0.50 .004 – .020	0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.40 / 0.50 mm .004 / .006 / .008 / .010 / .012 / .016 / .020 inch

Piston Feeler Gauge Set

tolerance acc.to T2

- on a metal ring
 - for adjusting of valves at narrow spaces and difficult to reach positions, etc.
- blades made from hardened spring steel
 - cylindrical shaped blades, 13 mm width
 - thickness tolerance in relation to the metric sizes



ART NO 8 blades 0.05 – 0.50 mm .002 – .020 inch	ART NO 13 blades 0.05 – 1.00 mm .002 – .040 inch	ART NO 20 blades 0.05 – 1.00 mm .002 – .040 inch	ART NO 20 blades 0.10 – 2.00 mm .004 – .080 inch	length of blades mm
436151	436155	436157	436158	150
436201	436205	436207	436208	200
436301	436305	436307	436308	300
436501	436505	436507	436508	500
436991	436995	436997	436998	1000

Piston Feeler Gauge Set, stainless steel

tolerance acc.to T2

- on a metal ring
 - for adjusting of valves at narrow spaces and to reach difficult positions, etc.
- blades made from stainless steel, hard rolled out
 - cylindrical shaped blades, 13 mm width
 - thickness tolerance in relation to the metric sizes



ART NO 8 blades 0.05 – 0.50 mm .002 – .020 inch	ART NO 13 blades 0.05 – 1.00 mm .002 – .040 inch	ART NO 20 blades 0.05 – 1.00 mm .002 – .040 inch	length of blades mm
437151	437155	437157	150
437201	437205	437207	200
437301	437305	437307	300

Feeler Gauge Blades and Thickness Gauge Foils

Feeler Gauge Spare Blades

- When ordering, please specify blade thickness!



Price on request



ART NO spring steel	steel thickness up to max. mm / inch	ART NO brass	brass thickness up to max. mm / inch	conical shape	cylindrical shape	length of blade mm
421110	2.00 / .080	424110	1.00 / .040	✓	—	100
431150	2.00 / .080	—	—	—	✓	150
431200	2.00 / .080	—	—	—	✓	200
431300	2.00 / .080	—	—	—	✓	300
431500	2.00 / .080	—	—	—	✓	500

Thickness Gauge Foil

tolerance acc.to T2

- 5 meter, rolled
- for automotive and engine industry and as levelling foil

- hardened spring steel or stainless steel, hard rolled out
- sizes in mm and inch on each blade
- rolled in a rugged plastic box
- From thickness 1.10 mm – 2.00 mm → only available in string of 1 m length
- from 0.65 mm rolled, without box



Other sizes available
on request

T2



ART NO spring steel	ART NO stainless steel	→ ← mm / inch	length m	ART NO spring steel	ART NO stainless steel	→ ← mm / inch	length m
455001	456001	0.01 / .0004	5	455055	—	0.55 / .022	5
455002	456002	0.02 / .0008	5	455060	—	0.60 / .024	5
455003	456003	0.03 / .0012	5	455065	—	0.65 / .026	5
455004	—	0.04 / .0016	5	455070	—	0.70 / .028	5
455005	456005	0.05 / .002	5	455075	—	0.75 / .030	5
455006	—	0.06 / .0024	5	455080	—	0.80 / .032	5
455007	—	0.07 / .0028	5	455085	—	0.85 / .034	5
455008	—	0.08 / .003	5	455090	—	0.90 / .036	5
455009	—	0.09 / .0035	5	455095	—	0.95 / .038	5
455010	456010	0.10 / .004	5	455100	456100	1.00 / .040	5
455012	—	0.12 / .005	5	457110	—	1.10	1
455015	456015	0.15 / .006	5	457120	—	1.20	1
455018	—	0.18 / .007	5	457130	—	1.30	1
455020	456020	0.20 / .008	5	457140	—	1.40	1
455025	456025	0.25 / .010	5	457150	—	1.50	1
455030	456030	0.30 / .012	5	457160	—	1.60	1
455035	—	0.35 / .014	5	457170	—	1.70	1
455040	456040	0.40 / .016	5	457180	—	1.80	1
455045	—	0.45 / .018	5	457190	—	1.90	1
455050	456050	0.50 / .020	5	457200	—	2.00	1

Holder for Feeler Gauge Blades



ART NO

458010

size

125 x 17 mm

Precision Thickness Gauge Foils

RECORD • Thickness Gauge Foil

DIN EN 10140:2006

- for adjusting, levelling etc.

- rolled in a rugged plastic box
- different material in different widths and different lengths available

brass: CuZn37 (MS63)
stainless steel: 1.4301
strength: 1300 – 1500 N/mm²



DIN

ART NO steel length x width 2500 x 150 mm	ART NO brass length x width 2500 x 150 mm	ART NO stainless steel length x width 2500 x 25 mm	ART NO stainless steel length x width 2500 x 50 mm	ART NO stainless steel length x width 2500 x 150 mm	→ mm
—	462010	463010	464010	465010	0.010
—	462020	463020	464020	465020	0.020
452025	462025	463025	464025	465025	0.025
—	462030	463030	464030	465030	0.030
—	462040	463040	464040	465040	0.040
452050	462050	463050	464050	465050	0.050
—	462060	463060	464060	465060	0.060
—	462070	463070	464070	465070	0.070
452075	462075	463075	464075	465075	0.075
—	462080	463080	464080	465080	0.080
—	462090	463090	464090	465090	0.090
452100	462100	463100	464100	465100	0.100
—	—	463120	464120	465120	0.120
452150	462150	463150	464150	465150	0.150
—	—	463180	464180	465180	0.180
452200	462200	463200	464200	465200	0.200
—	—	463220	464220	465220	0.220
452250	462250	463250	464250	465250	0.250
452300	462300	463300	464300	465300	0.300
—	—	463350	464350	465350	0.350
452400	462400	463400	464400	465400	0.400
—	—	463450	464450	465450	0.450
452500	462500	463500	464500	465500	0.500
—	—	—	—	465600	0.600 (rolled)
—	—	—	—	465700	0.700 (rolled)
—	—	—	—	465800	0.800 (rolled)
—	—	—	—	465999	1.000 (rolled)

RECORD • Thickness Gauge Foil

DIN EN 10140:2006

- for adjusting, levelling etc.

- stripes in a case with 10 or 5 blades
- different material in different widths and different lengths available



DIN

ART NO stainless steel length x width 300 x 50 mm/ 10 blades	ART NO stainless steel length x width 500 x 150 mm/ 5 blades	→ mm
466010	467010	0.010
466015	—	0.015
466020	467020	0.020
466025	467025	0.025
466030	467030	0.030
466040	467040	0.040
466050	467050	0.050
466060	467060	0.060
466070	467070	0.070
466075	467075	0.075
466080	467080	0.080
466090	467090	0.090

ART NO stainless steel length x width 300 x 50 mm/ 10 blades	ART NO stainless steel length x width 500 x 150 mm/ 5 blades	→ mm
466100	467100	0.100
466120	467120	0.120
466150	467150	0.150
466180	467180	0.180
466200	467200	0.200
466220	467220	0.220
466250	467250	0.250
466300	467300	0.300
466350	467350	0.350
466400	467400	0.400
466450	467450	0.450
466500	467500	0.500

Screw Pitch Gauges and Radius Gauges

Screw Pitch Gauges

- for internal and external measurements of threads
- fine cutted threads



ART No	quantity of blades	mm / inch	thread type	graduation
471009	24	0.25 – 6.00 mm	metr. 60°	6.0 / 5.5 / 5.0 / 4.5 / 4.0 / 3.5 / 3.0 / 2.5 / 2.0 / 1.75 / 1.5 / 1.25
471010	20	0.40 – 7.00 mm	metr. 60° SI	7.0 / 6.5 / 6.0 / 5.5 / 5.0 / 4.5 / 4.0 / 3.5 / 3.0 / 2.5
471011	20	4 – 30 Gang / t.p.i.	whitw. 55°	4.0 / 4.5 / 5.0 / 6.0 / 7.0 / 8.0 / 9.0 / 10.0 / 11.0 / 12
471012	28	4 – 62 Gang / t.p.i.	whitw. 55°	4.0 / 4.5 / 5.0 / 6.0 / 7.0 / 8.0 / 9.0 / 10.0 / 11.0 / 12 / 13 / 14 / 16 / 18
471013	48	4 – 62 / 0.40 – 7.0	whitw. / metr. SI	combined
471014	52	4 – 62 / 0.25 – 6.0	whitw. / metr.	combined
471015	6	8 – 28 Gang / t.p.i.	whitw. 55°	tube
471016	58	4 – 62 / 0.25 – 6.0 / 8 – 28	whitw. / metr.	combined
471017	14	10 – 40 Gang / t.p.i.	US 60° SAE	10 / 11 / 12 / 13 / 14 / 16 / 18
471018	30	6 – 60 Gang / t.p.i.	US 60° SAE	6 / 7 / 8 / 9 / 10 / 11 / 11.5 / 13 / 14 / 15 / 16 / 18 / 20 / 22 / 24
471019	30	4 – 42 Gang / t.p.i.	US 60° SAE	4.0 / 4.5 / 5.0 / 5.5 / 6.0 / 7.0 / 8.0 / 9.0 / 10 / 11 / 11.5 / 12 / 13 / 14 / 15
471020	52	4 – 84 Gang / t.p.i.	US 60° SAE	4 / 4.5 / 5.0 / 5.5 / 6.0 / 7.0 / 8.0 / 9.0 / 10 / 11 / 11.5 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 20 / 22 / 24 / 25 / 26 / 27 / 28 / 30 / 32
471021	22	4 – 64 Gang / t.p.i.	US 60° UNC	4 / 4.5 / 5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13
471022	16	12 – 80 Gang / t.p.i.	US 60° UNF	12 / 14 / 16 / 18 / 20 / 24 / 28 / 32
				36 / 40 / 44 / 48 / 56 / 64 / 72 / 80

Radius Gauges

- for testing of raised and recessed curves
- concave and convex shaped blades
- fine cutted forms

ART No 472105




ART No 472106 + 472107



ART No	ART No	quantity of blades	mm	composition mm
carbon steel	stainless steel			
472105	472115	34	1.0 – 7.0	1 / 1.25 / 1.5 / 1.75 / 2 / 2.25 / 2.5 / 2.75 / 3 / 3.5 / 4 / 4.5 / 5 / 5.5 / 6 / 6.5 / 7
472106	472116	32	7.5 – 15.0	7.5 / 8 / 8.5 / 9 / 9.5 / 10 / 10.5 / 11 / 11.5 / 12 / 12.5 / 13 / 13.5 / 14 / 14.5 / 15
472107	472117	30	15.5 – 25.0	15.5 / 16 / 16.5 / 17 / 17.5 / 18 / 18.5 / 19 / 19.5 / 20 / 21 / 22 / 23 / 24 / 25

Radius Gauge Set

- matt chrome finish
- for testing of raised and recessed curves
- concave and convex shaped blades
- each blade with 5 measuring points




ART No	quantity of blades	mm	composition mm
472109	26	0.5 – 13	0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 3.5 / 4 / 4.5 / 5 / 5.5 / 6 / 6.5 / 7 / 7.5 / 8 / 8.5 / 9 / 9.5 / 10 / 10.5 / 11 / 11.5 / 12 / 12.5 / 13

Cutting Gauges

Angle Gauge

- angles 1° – 45°
- fine machined edges

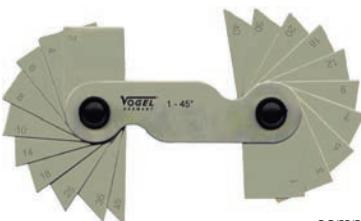

ART No	quantity of blades		composition °
472000	20	1° – 45°	1 / 2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10 / 12 / 14 / 16 / 18 / 20 / 25 / 30 / 35 / 40 / 45°

Angle Gauge Set

- stainless steel
- angles 5° – 90°
- each blade with several angles



ART No	quantity of blades		composition °
472020	18	5° – 90°	5 / 10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 55 / 60 / 65 / 70 / 75 / 80 / 85 / 90°

Angle Thread Cutting Gauge

- suitable for craftsmen and industry
- angles 55° whitworth or 60° metric



ART No		whitworth	mm
472001		55°	60°

Combined Angle Thread Cutting Gauge


- suitable for craftsmen and industry
- fine machined edges



ART No	angles threads °	flat threads threads/inch (t.p.i.)
472003	45 / 53.8 / 55 / 60 / 70°	2 / 2.5 / 3 / 3.5 / 4 / 4.5 / 5 / 6 / 7 / 8

Trapez Thread Cutting Gauge

- suitable for craftsmen and industry
- fine machined edges

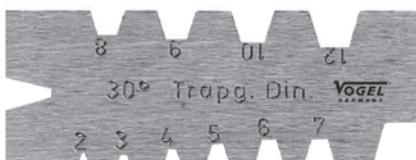

ART No	trapez thread °	trapez pitch mm
472004	30°	2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10 / 12

Combined Turning and Thread Cutting Gauge

- suitable for craftsmen and industry
- with trapez- and flat threads



ART No	trapez threads mm	flat threads threads/inch (t.p.i.)	angles °
472005	2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10 / 12	2 / 2.5 / 3 / 3.5 / 4 / 4.5 / 5 / 6 / 7 / 8	55° + 60°

Combined Turning and Thread Cutting Gauge


- suitable for craftsmen and industry
- with trapez- and saw cutting angles



ART No	trapez threads mm	saw cutting angles °	angles °
472006	2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10 / 12	40 / 45 / 50 / 55 / 60 / 65 / 70 / 75 / 80°	55° + 60°

Combined Turning and Thread Cutting Gauge

- suitable for craftsmen and industry
- with trapez- and saw cutting angles, with adjusting angle pointer

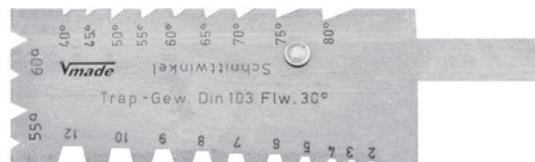

ART No	trapez threads mm	saw cutting angles °	adjusting angle °	angles °
472007	2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10 / 12	40 / 45 / 50 / 55 / 60 / 65 / 70 / 75 / 80°	0° - 30°	55° + 60°

ACME Thread Cutting Gauge


- suitable for craftsmen and industry
- SAE 60° / Ww-BSF 55° / 14.5° ACME / 47.5° BA



ART No	SAE °	whitworth BSF °	ACME °	BA °
472008	60°	55°	14.5°	47.5°

Lathe Tool Gauge

- suitable for craftsmen and industry
- for carbide turning tool and high speed turning tools
- fine machined edges

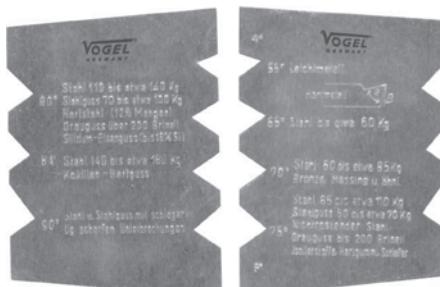



ART No	for carbide turning tools	ART No	for high speed turning tools
472009	✓	472010	✓

Cutting Gauges and Twist Drill Gauges

Twist Drill Grinding Gauges

- suitable for craftsmen and industry

- with 118° angle cut
(art.-no.: 472011)
- with 55° / 60° / 90° / 120° angle cut
(art.-no.: 472012)



ART NO	angle cut °	up to drill-Ø mm
472011	118°	50
472012	55° / 60° / 90° / 120°	60

Universal Twist Drill Grinding Gauge

- with fixing screw
- e.g. for general engineering

- made of Dur-Aluminium, surface hardened HRC63
- scratch-resistant, black anodized surface
- with adjustable angle indicator
- laser engraved, clear reading scale
- with thread table on the back



ART NO	angle cut °	up to drill-Ø mm
472021	30° – 160°	60

Universal Twist Drill Drinding Gauge



- suitable for craftsmen and industry
- with adjustable angle pointer



ART NO	angle cut °	up to drill-Ø mm
472013	30° – 160°	60

Universal Twist Drill Grinding Gauge

- suitable for craftsmen and industry
- special steel, hardened, ground and burnished
- with angle finder at the rear side

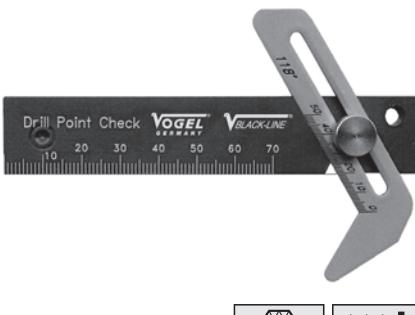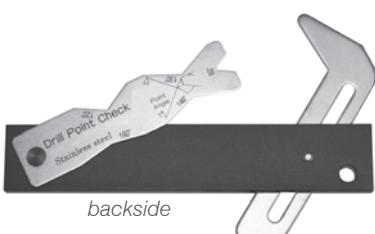

ART NO	mm	angle settings °	up to drill-Ø mm
472018	0 – 70	60° / 118° / 120° / 130° / 140° / 160°	100

Jet Gauges and Taper Gauges

Jet Gauges

- suitable for craftsmen and industry
- with hardened steel pins, in plastic holders mounted



ART No	quantity of pins	mm	composition mm
472201	20	0.45 – 1.50	0.45 / 0.50 / 0.55 / 0.60 / 0.65 / 0.70 / 0.75 / 0.80 / 0.85 / 0.90 / 0.95 / 1.00 1.05 / 1.10 / 1.15 / 1.20 / 1.25 / 1.30 / 1.40 / 1.50
472202	16	1.50 – 3.00	1.50 / 1.60 / 1.70 / 1.80 / 1.90 / 2.00 / 2.10 / 2.20 / 2.30 / 2.40 / 2.50 / 2.60 2.70 / 2.80 / 2.90 / 3.00

Precision Jet Gauges

- Product for highest demands

- measuring pin hardened, fine ground
- nickel plated housing



ART No	mm	mm	taper mm	mm
472219	0 – 3	0.1	1 : 10	Ø 6.5 x 118
472220	0 – 5	0.1	1 : 10	Ø 9.0 x 176

Taper Gauges

- flat version
- art.-no. 472370 – 472372: made of special steel, hardened
- art.-no. 472373 – 472375: made of technical ABS plastic
- art.-no. 472375: with slider made of aluminium, especially useful to measure hard to reach, not visible places, because the slider holds the position of measurement
- useful gauge, especially for the inspection of gap size, generators, motors, turbines, engines, etc.
- laser engraved graduation
- with knurled handle



ART No	mm	mm	mm	version
472370	0.5 – 7.0 mm	0.1	124 x 8 x 8	steel
472372	0.5 – 11.0 mm	0.1	153 x 8 x 12	steel
472373	0.5 – 11.0 mm	0.1	155 x 8 x 12	ABS plastic
472375	0.5 – 11.0 mm	0.1	124 x 8 x 8	Taper Gauge with slider (Taper Gauge is made of ABS plastic, slider is made of aluminium)

Hole Gauge

- flat version
- rear side with rounded edges

- special steel, hardened and fine ground
- laser engraved graduation






ART No	mm	mm	mm	mm
472320	1.0 – 15.0	0.1	178 x 12 x 2	

Taper Gauges, Keyways Caliper and Spring Gauges

Electr. Digital Arc Test Set

- ideal device for tooling

- USB data output
- aluminium housing with sturdy plastic cover
- large LCD display with clear reading, digit height 10 mm
- stem and spindle stainless, hardened and lapped
- exchangeable probe tips, M 2.5
- different sized probes for arc measurements
- measured value display in percent and radius display
- autom. power off, zero setting at any position
- Hold function, reading mm/inch, switchable
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual






ART No	linearly mm / inch	radius mm	mm / inch	mm	max. linear mm	max. radius mm
472120	12.7 / 0.5	5 – 700	0.01 / 0.0005	0.01	<0.02	<0.02

Electr. Digital Keyways Caliper

- for measurements of groove depth, etc.

- mechanical parts in stainless steel, hardened
- LCD display with clear reading, digit height 8 mm
- zero setting at any position
- reading switchable in mm/inch
- incl. 1x 1.5 V battery (type LR44, art.-no.: 2020192/B), with operation manual



ART No	mm / inch	mm / inch	mm	A °	L mm	for shaft-Ø mm
473315	50 / 2	0.01 / 0.0005	0.03	90	100	5 – 140
473316	50 / 2	0.01 / 0.0005	0.03	120	100	5 – 200

Spring Gauge

- scale made of brass
- for thickness measurements of sheet-metal etc.
- special steel, polished



ART No	mm	mm	total length mm
474802	0 – 15	0.1	150

Welding Gauge

- fan shape
- for measuring right angled welds
- stainless steel





ART NO	quantity of blades	mm	composition mm
474401	12	3 – 12	3 / 3.5 / 4 / 4.5 / 5 / 5.5 / 6 / 6.5 / 7 / 8 / 10 / 12

Precision Welding Gauge

- with vernier reading
- for measurements of flat welding seams and in corners etc.

- stainless steel hardened and fine ground
- scale matt chromed
- with fixing screw

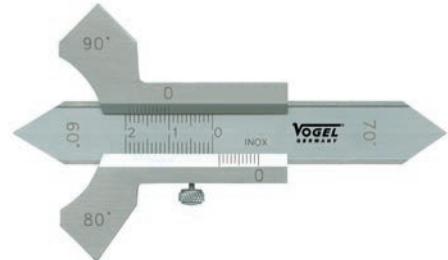



ART NO	mm	mm	angle °	mm	CC
474403	0 – 20	0.1	60 / 70 / 80 / 90	98 x 59 x 5.2	on request

Electr. Digital Welding Gauge

- with data output RS 232 C

- stainless steel, hardened and ground
- LCD display with clear reading, zero-setting at any position
- On/Off button, reading switchable mm/inch
- incl. 1x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual


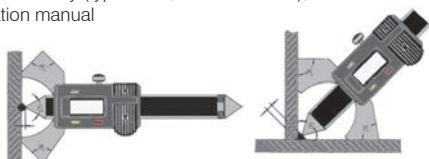


ART NO	mm / inch	mm / inch	max.	angle °	mm	CC
474410	0 – 20 / 0 – 0.8	0.01 / 0.0005	0.03	60 / 70 / 80 / 90	100 x 62 x 14	on request


Precision Welding Gauge

- with reading window


- stainless steel, hardened and fine ground
- reading through a window by a reference line

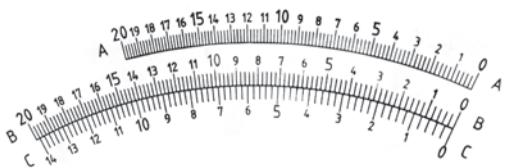

Read b from scale B.
When measuring b,
read a from scale C.



Permissible „a“
with unequal legs.
Rest on the
long arm (AL).



Read a from
scale A.






ART NO	mm	0.1	108 x 81.5 x 3.2	on request
474404				

Pipe Welding Gauge and Measuring Tool Set

Pipe Welding Gauge / Edge Offset Gauge

- with opposite movable measuring jaws
- for pipe welds up to 35 mm wall thickness
- stainless steel, hardened, polished surfaces
- reading scale in mm and inch, laser engraved graduation
- with reading window, with fixing screw

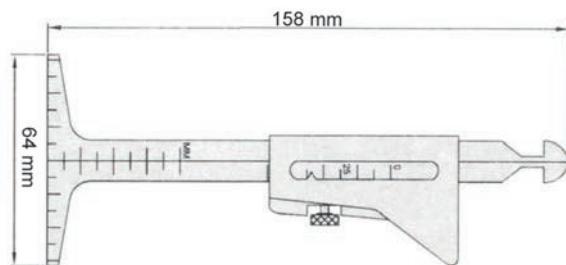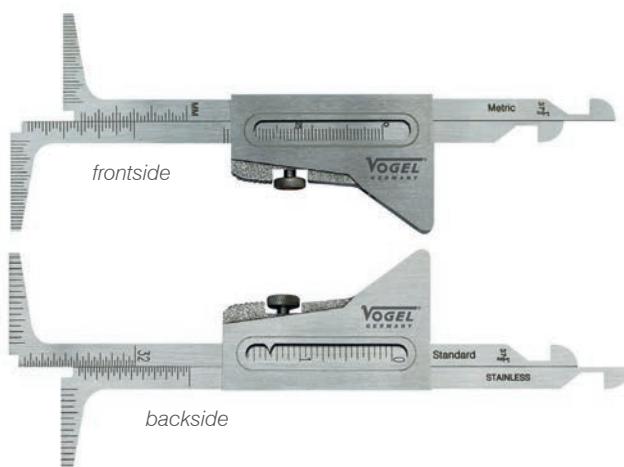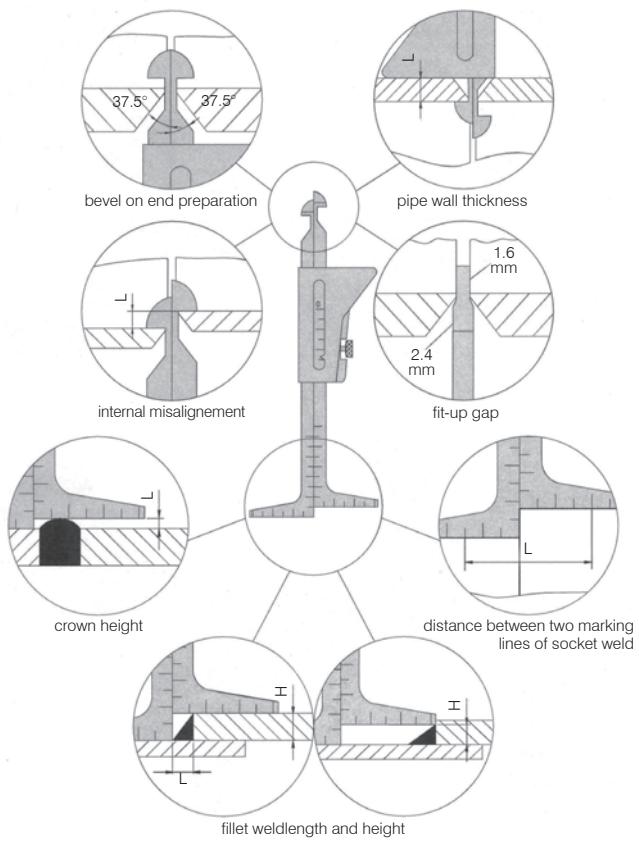

ART No

474409

mm

35

mm

1.0

mm

158 x 64 x 7

Measuring Tool Set

- selection of need-based compilations

ART No SET	pieces	consisting of	article
479901	4	Welding Gauge stainless steel, fan shape, quantity of blades 12, 3 – 12 mm	474401
		Precision Welding Gauge stainless steel, hardened and fine ground, with vernier reading, scale matt chromed, with fixing screw	474403
		Precision Welding Gauge stainless steel, hardened and fine ground, reading through a window by a reference line	474404
		Pipe Welding Gauge / Edge Offset Gauge with opposite movable measuring jaws, for pipe welds up to 35 mm wall thickness, stainless, hard- ened, reading 1.0 mm	474409



ART No 479901



Welding Gauge, Profile Gauges

Welding Gauge "S"

- for craft
- made from aluminium

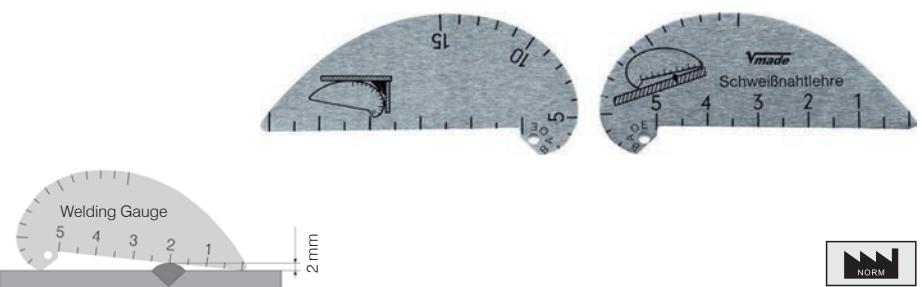

ART NO


474405

62.70 x 29.80 x 1.00



Profile Gauge

- especially use for taking-off and transferring all existing shapes
- with pins made of carbon steel

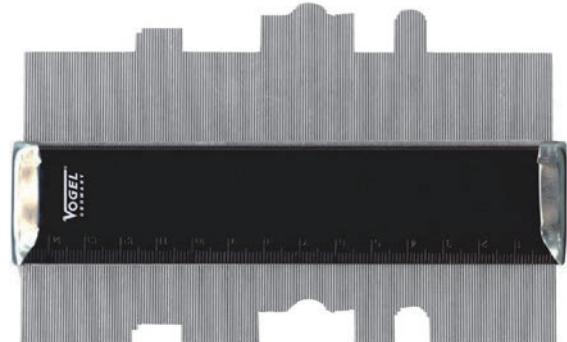

ART NO



B
mm

L2
mm


L1
mm

thickness
mm

474501	150 x 40	80	148	154	20
474502	300 x 75	150	293	305	33

Explore our **Website.**

www.vogel-germany.de

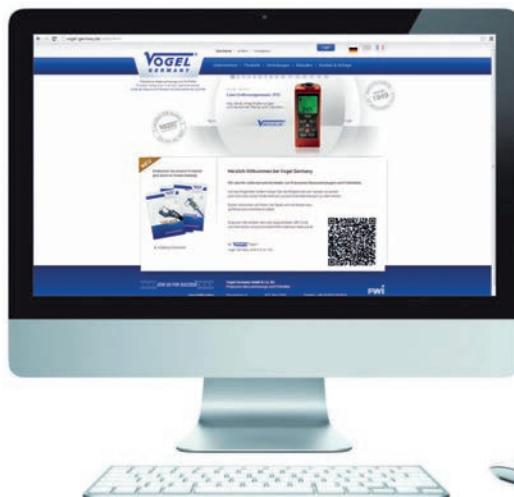

Any questions?

We are pleased to advise.

Limit Plug Gauges

Limit Plug Gauges



DIN EN ISO 1938-1

• designed acc. to DIN 2245 / 2246 / 2247



- special steel, finely ground and lapped
- with „Go“ and „No-Go“ side



Dimensions for bores and shafts

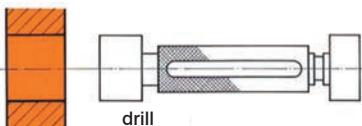

Dimensions for bores and shafts

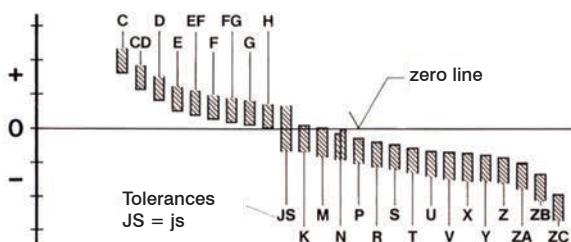

Other tolerances on request
available: 37090-xxx



ART NO	size-Ø mm	CC
37080-0010	1.0	on request
37080-0012	1.2	on request
37080-0015	1.5	on request
37080-0018	1.8	on request
37080-0020	2.0	on request
37080-0022	2.2	on request
37080-0025	2.5	on request
37080-0028	2.8	on request
37080-0030	3.0	on request
37080-0035	3.5	on request
37080-0040	4.0	on request
37080-0045	4.5	on request
37080-0050	5.0	on request
37080-0060	6.0	on request
37080-0070	7.0	on request
37080-0080	8.0	on request
37080-0090	9.0	on request
37080-0100	10	on request
37080-0110	11	on request
37080-0120	12	on request
37080-0130	13	on request
37080-0140	14	on request
37080-0150	15	on request
37080-0160	16	on request
37080-0170	17	on request
37080-0180	18	on request
37080-0190	19	on request
37080-0200	20	on request
37080-0210	21	on request
37080-0220	22	on request
37080-0230	23	on request
37080-0240	24	on request
37080-0250	25	on request
37080-0260	26	on request
37080-0270	27	on request
37080-0280	28	on request

ART NO	size-Ø mm	CC
37080-0300	30	on request
37080-0320	32	on request
37080-0330	33	on request
37080-0340	34	on request
37080-0350	35	on request
37080-0360	36	on request
37080-0370	37	on request
37080-0380	38	on request
37080-0400	40	on request
37080-0420	42	on request
37080-0440	44	on request
37080-0450	45	on request
37080-0460	46	on request
37080-0470	47	on request
37080-0480	48	on request
37080-0500	50	on request
37080-0520	52	on request
37080-0550	55	on request
37080-0580	58	on request
37080-0600	60	on request
37080-0620	62	on request
37080-0650	65	on request
37080-0680	68	on request
37080-0700	70	on request
37080-0720	72	on request
37080-0750	75	on request
37080-0780	78	on request
37080-0800	80	on request
37080-0820	82	on request
37080-0850	85	on request
37080-0880	88	on request
37080-0900	90	on request
37080-0920	92	on request
37080-0950	95	on request
37080-0980	98	on request
37080-1000	100	on request

Setting Ring Gauges, acc. to DIN 2250 C, DIN ISO 286/1

- special steel, hardened, finely ground and lapped

Other tolerances
available on request!



DIN



DIN ISO

ART NO setting ring	Ø mm	CC
370770-0010	1.0	on request
370770-0012	1.2	on request
370770-0015	1.5	on request
370770-0018	1.8	on request
370770-0020	2.0	on request
370770-0022	2.2	on request
370770-0025	2.5	on request
370770-0028	2.8	on request
370770-0030	3.0	on request
370770-0035	3.5	on request
370770-0040	4.0	on request
370770-0045	4.5	on request
370770-0050	5.0	on request
370770-0060	6.0	on request
370770-0070	7.0	on request
370770-0080	8.0	on request
370770-0090	9.0	on request
370770-0100	10.0	on request
370770-0110	11.0	on request
370770-0120	12.0	on request
370770-0130	13.0	on request
370770-0140	14.0	on request
370770-0150	15.0	on request
370770-0160	16.0	on request
370770-0170	17.0	on request
370770-0180	18.0	on request
370770-0190	19.0	on request
370770-0200	20.0	on request
370770-0210	21.0	on request
370770-0220	22.0	on request
370770-0230	23.0	on request
370770-0240	24.0	on request
370770-0250	25.0	on request
370770-0260	26.0	on request
370770-0270	27.0	on request
370770-0280	28.0	on request
370770-0300	30.0	on request
370770-0320	32.0	on request
370770-0330	33.0	on request
370770-0340	34.0	on request
370770-0350	35.0	on request
370770-0360	36.0	on request
370770-0370	37.0	on request
370770-0380	38.0	on request
370770-0400	40.0	on request
370770-0420	42.0	on request
370770-0440	44.0	on request
370770-0450	45.0	on request

ART NO setting ring	Ø mm	CC
370770-0460	46.0	on request
370770-0470	47.0	on request
370770-0480	48.0	on request
370770-0500	50.0	on request
370770-0520	52.0	on request
370770-0550	55.0	on request
370770-0580	58.0	on request
370770-0600	60.0	on request
370770-0620	62.0	on request
370770-0650	65.0	on request
370770-0680	68.0	on request
370770-0700	70.0	on request
370770-0720	72.0	on request
370770-0750	75.0	on request
370770-0780	78.0	on request
370770-0800	80.0	on request
370770-0820	82.0	on request
370770-0850	85.0	on request
370770-0880	88.0	on request
370770-0900	90.0	on request
370770-0920	92.0	on request
370770-0950	95.0	on request
370770-0980	98.0	on request
370770-1000	100.0	on request
370770-1050	105.0	on request
370770-1100	110.0	on request
370770-1150	115.0	on request
370770-1200	120.0	on request
370770-1250	125.0	on request
370770-1300	130.0	on request
370770-1350	135.0	on request
370770-1400	140.0	on request
370770-1450	145.0	on request
370770-1500	150.0	on request
370770-1550	155.0	on request
370770-1600	160.0	on request
370770-1650	165.0	on request
370770-1700	170.0	on request
370770-1750	175.0	on request
370770-1800	180.0	on request
370770-1850	185.0	on request
370770-1900	190.0	on request
370770-1950	195.0	on request
370770-2000	200.0	on request
370770-2100	210.0	on request
370770-2200	220.0	on request
370770-2400	240.0	on request
370770-2500	250.0	on request
370770-2600	260.0	on request
370770-2800	280.0	on request
370770-3000	300.0	on request
370770-3200	320.0	on request
370770-3400	340.0	on request
370770-3600	360.0	on request
370770-3800	380.0	on request
370770-4000	400.0	on request

Limit Thread Plug Gauges

Limit Thread Plug Gauge

DIN 13

- metric ISO-threads

- special steel, hardened and finely ground
- „Go“ and „No-Go“ thread plug gauge



Other sizes or types
are available on request!



ART NO	tolerance class	thread-Ø mm	CC
390101	5H	1.0 x 0.25	on request
390102	5H	1.1 x 0.25	on request
390103	5H	1.2 x 0.25	on request
390104	5H	1.4 x 0.3	on request
390105	6H	1.6 x 0.35	on request
390106	6H	1.8 x 0.35	on request
390107	6H	2.0 x 0.4	on request
390108	6H	2.2 x 0.45	on request
390109	6H	2.5 x 0.45	on request
390110	6H	3.0 x 0.5	on request
390111	6H	3.5 x 0.6	on request
390112	6H	4.0 x 0.7	on request
390113	6H	4.5 x 0.75	on request
390114	6H	5.0 x 0.8	on request
390115	6H	6.0 x 1.0	on request
390116	6H	7.0 x 1.0	on request
390117	6H	8.0 x 1.25	on request
390118	6H	9.0 x 1.25	on request
390119	6H	10 x 1.5	on request
390120	6H	12 x 1.75	on request
390121	6H	14 x 2.0	on request
390122	6H	16 x 2.0	on request
390123	6H	18 x 2.5	on request
390124	6H	20 x 2.5	on request
390125	6H	22 x 2.5	on request
390126	6H	24 x 3.0	on request
390127	6H	27 x 3.0	on request
390128	6H	30 x 3.5	on request
390129	6H	33 x 3.5	on request
390130	6H	36 x 4.0	on request
390131	6H	39 x 4.0	on request

Limit Thread Ring Gauges and Sets

Limit Thread Ring Gauge

DIN 13

- metric ISO-threads
 - special steel, hardened and finely ground



type B „Go“ thread ring gauge
type C „No-Go“ thread ring gauge



type C



ART NO type B	ART NO type C	tolerance class	thread-Ø mm	CC
390201	390301	6h	1.0 x 0.25	on request
390202	390302	6h	1.1 x 0.25	on request
390203	390303	6h	1.2 x 0.25	on request
390204	390304	6h	1.4 x 0.3	on request
390205	390305	6g	1.6 x 0.35	on request
390206	390306	6g	1.8 x 0.35	on request
390207	390307	6g	2.0 x 0.4	on request
390208	390308	6g	2.2 x 0.45	on request
390209	390309	6g	2.5 x 0.45	on request
390210	390310	6g	3.0 x 0.5	on request
390211	390311	6g	3.5 x 0.6	on request
390212	390312	6g	4.0 x 0.7	on request
390213	390313	6g	4.5 x 0.75	on request
390214	390314	6g	5.0 x 0.8	on request
390215	390315	6g	6.0 x 1.0	on request
390216	390316	6g	7.0 x 1.0	on request
390217	390317	6g	8.0 x 1.25	on request
390218	390318	6g	9.0 x 1.25	on request
390219	390319	6g	10 x 1.5	on request
390220	390320	6g	12 x 1.75	on request
390221	390321	6g	14 x 2.0	on request
390222	390322	6g	16 x 2.0	on request
390223	390323	6g	18 x 2.5	on request
390224	390324	6g	20 x 2.5	on request
390225	390325	6g	22 x 2.5	on request

Limit Thread Plug Gauge Set

Limit Thread Ring Gauge Set

Limit Plug Gauge Set

- acc. to DIN tolerances
 - special steel, hardened, fine ground



ART NO	plug gauge set	ring gauge set	„Go“	„No-Go“	contents mm	CC
390801	✓	—	✓	✓	M 3 / M 4 / M 5 / M 6 / M 8 / M 10 / M 12	on request
390805	—	✓	✓	—	M 3 / M 4 / M 5 / M 6 / M 8 / M 10 / M 12	on request
390806	—	✓	—	✓	M 3 / M 4 / M 5 / M 6 / M 8 / M 10 / M 12	on request
370801	✓	—	✓	✓	3H7 / 4H7 / 5H7 / 6H7 / 8H7 / 10H7 / 12H7	on request


Precision Measuring Steel Pins

Cylindrical Measuring Pins in a Set


DIN 2269

- Product for highest demands

- special chrome-steel with high wearing quality and enough resistance to corrosion
- hardened, finely ground and lapped
- from up 3.0 mm marked with the size on the top surface



Other sizes available
on request!



Pin holder find
on page 251



DIN

ART NO	contents pcs.	size-Ø mm	steps mm	max. ± mm	length mm	CC
380210	21	0.10 - 0.30	0.01	0.0005	30	on request
380211	21	0.30 - 0.50	0.01	0.0005	30	on request
380212	51	0.50 - 1.00	0.01	0.0005	30	on request
380213	19	0.10 - 1.00	0.05	0.0005	30	on request
380301	21	0.10 - 0.30	0.01	0.0010	40	on request
380302	21	0.30 - 0.50	0.01	0.0010	40	on request
380303	51	0.50 - 1.00	0.01	0.0010	40	on request
380304	19	0.10 - 1.00	0.05	0.0010	40	on request
380307	21	1.00 - 2.00	0.05	0.0010	70	on request
380308	21	2.00 - 3.00	0.05	0.0010	70	on request
380309	21	3.00 - 4.00	0.05	0.0010	70	on request
380310	21	4.00 - 5.00	0.05	0.0010	70	on request
380311	21	5.00 - 6.00	0.05	0.0010	70	on request
380312	21	6.00 - 7.00	0.05	0.0010	70	on request
380313	21	7.00 - 8.00	0.05	0.0010	70	on request
380314	21	8.00 - 9.00	0.05	0.0010	70	on request
380315	21	9.00 - 10.00	0.05	0.0010	70	on request
380316	100	10.01 - 11.00	0.01	0.0020	50	on request
380317	100	11.01 - 12.00	0.01	0.0020	50	on request
380318	100	12.01 - 13.00	0.01	0.0020	50	on request
380319	100	13.01 - 14.00	0.01	0.0020	50	on request
380320	100	14.01 - 15.00	0.01	0.0020	50	on request
380321	100	15.01 - 16.00	0.01	0.0020	50	on request
380323	100	16.01 - 17.00	0.01	0.0020	50	on request
380324	100	17.01 - 18.00	0.01	0.0020	50	on request
380325	100	18.01 - 19.00	0.01	0.0020	50	on request
380326	100	19.01 - 20.00	0.01	0.0020	50	on request
380350	101	1.00 - 2.00	0.01	0.0010	70	on request
380351	101	2.00 - 3.00	0.01	0.0010	70	on request
380352	101	3.00 - 4.00	0.01	0.0010	70	on request
380353	101	4.00 - 5.00	0.01	0.0010	70	on request
380354	101	5.00 - 6.00	0.01	0.0010	70	on request
380355	101	6.00 - 7.00	0.01	0.0010	70	on request
380356	101	7.00 - 8.00	0.01	0.0010	70	on request
380357	101	8.00 - 9.00	0.01	0.0010	70	on request
380358	101	9.00 - 10.00	0.01	0.0010	70	on request
380341	41	1.00 - 5.00	0.10	0.0010	70	on request
380342	91	1.00 - 10.00	0.10	0.0010	70	on request
380343	91	0.50 - 5.00	0.05	0.0010	40/70	on request
380344	100	5.05 - 10.00	0.05	0.0010	70	on request
380345	100	10.05 - 15.00	0.05	0.0020	50	on request
380346	100	15.05 - 20.00	0.05	0.0020	50	on request

Precision Measuring Steel Pins

Singly Cylindrical Measuring Pins

DIN 2269

- for inspection and measuring of bores, bore distances, or as setting-gauge for measuring instruments
- for inspection of internal- and external-tooth system and many other application
- special chrome steel with high wearing quality and enough resistance to corrosion, hardened, finely ground and lapped

Option

- alloy steel handle, available at extra charge
(when order the handle, specify the diameter also, please!)



ART N°	size-ø mm	max. ± mm	length mm	CC
3805010...	0.10 – 1.00	0.0005	30	on request
3805011...	0.10 – 0.99	0.0010	40	on request
3805012...	1.00 – 3.00	0.0010	40	on request
3805013...	1.00 – 3.00	0.0010	70	on request
3805014...	3.01 – 6.00	0.0010	70	on request
3805015...	6.01 – 10.20	0.0010	70	on request



Other sizes available
on request!
Price depending on size value.



DIN

ART N°	size-ø mm	max. ± mm	length mm	CC
3805030...	10.00 – 12.00	0.0020	50	on request
3805031...	12.01 – 14.00	0.0020	50	on request
3805032...	14.01 – 16.00	0.0020	50	on request
3805033...	16.01 – 18.00	0.0020	50	on request
3805034...	18.01 – 20.05	0.0020	50	on request
—	—	—	—	—

Pin Holder

- with marking "G" (Go) + "A" (No-Go)



ART N°	for pin-ø mm	ART N°	for pin-ø mm	ART N°	for pin-ø mm
381001	1 – 2	381003	4 – 6	381005	8 – 10
381002	2 – 4	381004	6 – 8	—	—

Precision Measuring Pins in a Set

• 75-pieces

- special chrome steel with high wearing quality and enough resistance to corrosion, hardened, finely ground and lapped
- nominal-size-ø 5 mm
- steps in ø m, tolerance ø 0.3 µm
- with plastic-handles



ART N°	tolerance gradations µm	CC
380201	± 0 $+ 1 / 2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 18 / 20 / 22 / 24 / 26$ $28 / 30 / 35 / 40 / 45 / 50 / 55 / 60 / 65 / 70 / 75 / 80 / 85 / 90 / 95 / 100$ $- 1 / 2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 18 / 20 / 22 / 24 / 26$ $28 / 30 / 35 / 40 / 45 / 50 / 55 / 60 / 65 / 70 / 75 / 80 / 85 / 90 / 95 / 100$	on request



NORM



Parallel Gauge Blocks

Parallel Gauge Blocks, individual


DIN EN ISO 3650

• product for highest demands

- from specially alloyed, particularly cured and relaxed special steel or of zirconia ceramic (best ceramic grade)
- ceramic gauge blocks are particularly suitable for the measurement chamber and test room
- each gauge block is marked with an identification number

Options

- art.-no. 3594001: complete calibration according to VDI/VDE/DGQ 2618 sheet 3.1
- gauge blocks made of tungsten carbide available on request

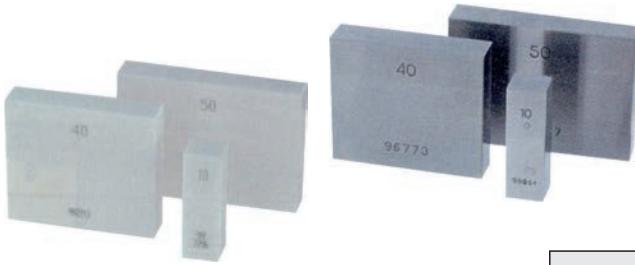

DIN EN ISO

size = nominal size mm	ART N° steel	ART N° ceramic	ART N° steel	ART N° ceramic
0.50	350200-00050	350201-00050	350210-00050	350211-00050
1.000	350200-001000	350201-001000	350210-001000	350211-001000
1.0005	350200-001005	350201-001005	350210-001005	350211-001005
1.001	350200-001001	350201-001001	350210-001001	350211-001001
1.002	350200-001002	350201-001002	350210-001002	350211-001002
1.003	350200-001003	350201-001003	350210-001003	350211-001003
1.004	350200-001004	350201-001004	350210-001004	350211-001004
1.005	350200-001005	350201-001005	350210-001005	350211-001005
1.006	350200-001006	350201-001006	350210-001006	350211-001006
1.007	350200-001007	350201-001007	350210-001007	350211-001007
1.008	350200-001008	350201-001008	350210-001008	350211-001008
1.009	350200-001009	350201-001009	350210-001009	350211-001009
1.01	350200-00101	350201-00101	350210-00101	350211-00101
1.02	350200-00102	350201-00102	350210-00102	350211-00102
1.03	350200-00103	350201-00103	350210-00103	350211-00103
1.04	350200-00104	350201-00104	350210-00104	350211-00104
1.05	350200-00105	350201-00105	350210-00105	350211-00105
1.06	350200-00106	350201-00106	350210-00106	350211-00106
1.07	350200-00107	350201-00107	350210-00107	350211-00107
1.08	350200-00108	350201-00108	350210-00108	350211-00108
1.09	350200-00109	350201-00109	350210-00109	350211-00109
1.10	350200-00110	350201-00110	350210-00110	350211-00110
1.11	350200-00111	350201-00111	350210-00111	350211-00111
1.12	350200-00112	350201-00112	350210-00112	350211-00112
1.13	350200-00113	350201-00113	350210-00113	350211-00113
1.14	350200-00114	350201-00114	350210-00114	350211-00114
1.15	350200-00115	350201-00115	350210-00115	350211-00115
1.16	350200-00116	350201-00116	350210-00116	350211-00116
1.17	350200-00117	350201-00117	350210-00117	350211-00117
1.18	350200-00118	350201-00118	350210-00118	350211-00118
1.19	350200-00119	350201-00119	350210-00119	350211-00119
1.20	350200-00120	350201-00120	350210-00120	350211-00120
1.21	350200-00121	350201-00121	350210-00121	350211-00121
1.22	350200-00122	350201-00122	350210-00122	350211-00122
1.23	350200-00123	350201-00123	350210-00123	350211-00123
1.24	350200-00124	350201-00124	350210-00124	350211-00124
1.25	350200-00125	350201-00125	350210-00125	350211-00125
1.26	350200-00126	350201-00126	350210-00126	350211-00126
1.27	350200-00127	350201-00127	350210-00127	350211-00127
1.28	350200-00128	350201-00128	350210-00128	350211-00128
1.29	350200-00129	350201-00129	350210-00129	350211-00129
1.30	350200-00130	350201-00130	350210-00130	350211-00130
1.31	350200-00131	350201-00131	350210-00131	350211-00131
1.32	350200-00132	350201-00132	350210-00132	350211-00132
1.33	350200-00133	350201-00133	350210-00133	350211-00133
1.34	350200-00134	350201-00134	350210-00134	350211-00134
1.35	350200-00135	350201-00135	350210-00135	350211-00135
1.36	350200-00136	350201-00136	350210-00136	350211-00136
1.37	350200-00137	350201-00137	350210-00137	350211-00137
1.38	350200-00138	350201-00138	350210-00138	350211-00138
1.39	350200-00139	350201-00139	350210-00139	350211-00139
1.40	350200-00140	350201-00140	350210-00140	350211-00140
1.41	350200-00141	350201-00141	350210-00141	350211-00141
1.42	350200-00142	350201-00142	350210-00142	350211-00142
1.43	350200-00143	350201-00143	350210-00143	350211-00143
1.44	350200-00144	350201-00144	350210-00144	350211-00144
1.45	350200-00145	350201-00145	350210-00145	350211-00145
1.46	350200-00146	350201-00146	350210-00146	350211-00146
1.47	350200-00147	350201-00147	350210-00147	350211-00147

size = nominal size mm	ART NO steel	ART NO ceramic	ART NO steel	ART NO ceramic
	tolerance class 0	tolerance class 0	tolerance class 1	tolerance class 1
1.48	350200-00148	350201-00148	350210-00148	350211-00148
1.49	350200-00149	350201-00149	350210-00149	350211-00149
1.50	350200-00150	350201-00150	350210-00150	350211-00150
1.60	350200-00160	350201-00160	350210-00160	350211-00160
1.70	350200-00170	350201-00170	350210-00170	350211-00170
1.80	350200-00180	350201-00180	350210-00180	350211-00180
1.90	350200-00190	350201-00190	350210-00190	350211-00190
2.00	350200-00200	350201-00200	350210-00200	350211-00200
2.50	350200-00250	350201-00250	350210-00250	350211-00250
3.00	350200-00300	350201-00300	350210-00300	350211-00300
3.50	350200-00350	350201-00350	350210-00350	350211-00350
4.00	350200-00400	350201-00400	350210-00400	350211-00400
4.50	350200-00450	350201-00450	350210-00450	350211-00450
5.00	350200-00500	350201-00500	350210-00500	350211-00500
5.50	350200-00550	350201-00550	350210-00550	350211-00550
6.00	350200-00600	350201-00600	350210-00600	350211-00600
6.50	350200-00650	350201-00650	350210-00650	350211-00650
7.00	350200-00700	350201-00700	350210-00700	350211-00700
7.50	350200-00750	350201-00750	350210-00750	350211-00750
8.00	350200-00800	350201-00800	350210-00800	350211-00800
8.50	350200-00850	350201-00850	350210-00850	350211-00850
9.00	350200-00900	350201-00900	350210-00900	350211-00900
9.50	350200-00950	350201-00950	350210-00950	350211-00950
10.00	350200-01000	350201-01000	350210-01000	350211-01000
10.50	350200-01050	350201-01050	350210-01050	350211-01050
11.00	350200-01100	350201-01100	350210-01100	350211-01100
11.50	350200-01150	350201-01150	350210-01150	350211-01150
12.00	350200-01200	350201-01200	350210-01200	350211-01200
12.50	350200-01250	350201-01250	350210-01250	350211-01250
13.00	350200-01300	350201-01300	350210-01300	350211-01300
13.50	350200-01350	350201-01350	350210-01350	350211-01350
14.00	350200-01400	350201-01400	350210-01400	350211-01400
14.50	350200-01450	350201-01450	350210-01450	350211-01450
15.00	350200-01500	350201-01500	350210-01500	350211-01500
15.50	350200-01550	350201-01550	350210-01550	350211-01550
16.00	350200-01600	350201-01600	350210-01600	350211-01600
16.50	350200-01650	350201-01650	350210-01650	350211-01650
17.00	350200-01700	350201-01700	350210-01700	350211-01700
17.50	350200-01750	350201-01750	350210-01750	350211-01750
18.00	350200-01800	350201-01800	350210-01800	350211-01800
18.50	350200-01850	350201-01850	350210-01850	350211-01850
19.00	350200-01900	350201-01900	350210-01900	350211-01900
19.50	350200-01950	350201-01950	350210-01950	350211-01950
20.00	350200-02000	350201-02000	350210-02000	350211-02000
21.00	350200-02100	350201-02100	350210-02100	350211-02100
22.00	350200-02200	350201-02200	350210-02200	350211-02200
23.00	350200-02300	350201-02300	350210-02300	350211-02300
24.00	350200-02400	350201-02400	350210-02400	350211-02400
25.00	350200-02500	350201-02500	350210-02500	350211-02500
30.00	350200-03000	350201-03000	350210-03000	350211-03000
40.00	350200-04000	350201-04000	350210-04000	350211-04000
41.30	350200-04130	350201-04130	350210-04130	350211-04130
50.00	350200-05000	350201-05000	350210-05000	350211-05000
60.00	350200-06000	350201-06000	350210-06000	350211-06000
70.00	350200-07000	350201-07000	350210-07000	350211-07000
80.00	350200-08000	350201-08000	350210-08000	350211-08000
90.00	350200-09000	350201-09000	350210-09000	350211-09000
100.00	350200-10000	350201-10000	350210-10000	350211-10000



Precision measuring tools and test instruments

Follow us on Facebook and never miss
any news about our products, promotions
and offers

- ✓ highest quality
- ✓ large product range
- ✓ best service

Discover now



facebook.com/VogelGermany

Steel Parallel Gauge Block Sets

Parallel Gauge Block Set

DIN EN ISO 3650

- for standard use in workshop area and at the machine

- made of specially alloyed, particularly cured and relaxed special steel
- each gauge block is marked with an identification number
- calibration certificate available by extra charge



ART NO	tolerance class	quantity per set	pcs.	nominal size mm	steps mm	CC
351001	0	32	1	1.005	—	on request
351011	1		9	1.01 – 1.09	0.01	on request
351021	2		9	1.1 – 1.9	0.1	on request
			4	1.0 – 9.0 10 / 20 / 30 / 50	1.0 —	
351002	0	47	1	1.005	—	on request
351012	1		19	1.01 – 1.19	0.01	on request
351022	2		8	1.2 – 1.9	0.1	on request
			9	1.0 – 9.0	1.0	
			10	10 – 100	10.0	
351003	0	87	9	1.001 – 1.009	0.001	on request
351013	1		49	1.01 – 1.49	0.01	on request
351023	2		19	0.5 – 9.5	0.5	on request
			10	10 – 100	10.0	
351004	0	103	1	1.005	—	on request
351014	1		49	1.01 – 1.49	0.01	on request
351024	2		49	0.5 – 24.5	0.5	on request
			4	25 – 100	25.0	

Rectangular Gauge Block Set

DIN EN ISO 3650

- suitable for use in measurement and test room

- made of specially alloyed, particularly cured and relaxed special steel
- each gauge block is marked with an identification number
- calibration certificate available by extra charge



ART NO	tolerance class	quantity per set	nominal size mm	CC
350180	0	8	125 / 150 / 175 / 200 / 250 / 300 / 400 / 500	on request
350181	1	8	125 / 150 / 175 / 200 / 250 / 300 / 400 / 500	on request
350183	0	5	600 / 700 / 800 / 900 / 1000	on request
350184	1	5	600 / 700 / 800 / 900 / 1000	on request

Steel Parallel Gauge Block Sets

Parallel Gauge Block Set

DIN EN ISO 3650

- suitable for use in measurement and test room**

- made of specially alloyed, particularly cured and relaxed special steel
- each gauge block is marked with an identification number
- calibration certificate available by extra charge



Tungsten carbide sets
available on request!



DIN EN ISO

ART NO	tolerance class	quantity per set	pcs.	nominal size mm	steps mm	CC
350001	0	32	1	1.005	—	on request
350011	1			1.01 – 1.09	0.01	on request
350021	2			1.1 – 1.9	0.1	on request
				1.0 – 9.0	1.0	
				10 / 20 / 30 / 50	—	
350002	0	47	1	1.005	—	on request
350012	1			1.01 – 1.19	0.01	on request
350022	2			1.2 – 1.9	0.1	on request
				1.0 – 9.0	1.0	
				10 – 100	10.0	
350003	0	87	9	1.001 – 1.009	0.001	on request
350013	1			1.01 – 1.49	0.01	on request
350023	2			0.5 – 9.5	0.5	on request
				10 – 100	10.0	
350004	0	103	1	1.005	—	on request
350014	1			1.01 – 1.49	0.01	on request
350024	2			0.5 – 24.5	0.5	on request
				25 – 100	25.0	
350005	0	112	1	1.0005	—	on request
350015	1			1.001 – 1.009	0.001	on request
350025	2			1.01 – 1.49	0.01	on request
				0.5 – 24.5	0.5	
				10 – 100	25.0	

Rectangular Gauge Block Set

DIN EN ISO 3650

- suitable for use in measurement and test room**

- made of specially alloyed, particularly cured and relaxed special steel
- each gauge block is marked with an identification number
- calibration certificate available by extra charge



DIN EN ISO

ART NO	tolerance class	quantity per set	nominal size mm	CC
350185	0	8	125 / 150 / 175 / 200 / 250 / 300 / 400 / 500	on request
350186	1	8	125 / 150 / 175 / 200 / 250 / 300 / 400 / 500	on request
350187	0	5	600 / 700 / 800 / 900 / 1000	on request
350188	1	5	600 / 700 / 800 / 900 / 1000	on request

Ceramic Parallel Gauge Block Sets

Ceramic Parallel Gauge Block Set

DIN EN ISO 3650

- suitable for use in measurement and test room**

- made of zirconia ceramic, best ceramic quality
- up to 50-fold higher wear resistance than steel
- high thermal stability
- high resistance to knocks and drops
- does not burr easily and high corrosion resistant
- each gauge block is marked with an identification number
- calibration certificate available by extra charge




Other set combinations
available on request!

ART No	tolerance class	quantity per set	pcs.	nominal size mm	steps mm	CC
350031	0	32	1 9 9 9 4	1.005 1.01 – 1.09 1.1 – 1.9 1.0 – 9.0 10 / 20 / 30 / 50	— 0.01 0.1 1.0 —	on request
350041	1					on request
350032	0	47	1 19 8 9 10	1.005 1.01 – 1.19 1.2 – 1.9 1.0 – 9.0 10 – 100	— 0.01 0.1 1.0 10.0	on request
350042	1					on request
350033	0	87	9 49 19 10	1.001 – 1.009 1.01 – 1.49 0.5 – 9.5 10 – 100	0.001 0.01 0.5 10.0	on request
350043	1					on request

Optical Parallels

- designed to inspect parallelism and flatness of measuring faces of micrometers
- each glass is marked with an identification-number (glued)
- ground and polished on both sides
- polished and faceted border



example



ART No	nominal size mm	glass-ø mm	accuracy of flatness µm	parallelism µm	CC DAkkS
350305-1	15	55	≤ 0.10	—	on request
350309	12.00 / 12.12 / 12.25 / 12.37	30	≤ 0.15	≤ 0.30	on request
350309-1	25.00 / 25.12 / 25.25 / 25.37	30	≤ 0.15	≤ 0.40	on request

Inspection Gauge Block Sets

Inspection Gauge Block Set, for Micrometers

DIN EN ISO 3650

- for review and adjustment of micrometer acc. to VDI/VDE/DGQ 2618, page 5
- with optical plane face glass and gloves
- each gauge block is marked with an identification number
- calibration certificate without optical plane glass calibration by extra charge



ART NO ceramic	ART NO steel	ART NO carbide	tolerance class	quantity per set	nominal size mm	CC
350110	350130	350119	1	10	2.50 / 5.10 / 7.70 / 10.30 / 12.90 / 15.00 / 17.60 / 20.20 / 22.80 / 25.00	on request

Inspection Gauge Block Set, for Micrometers

DIN EN ISO 3650

- for review and adjustment of micrometer acc. to VDI/VDE/DGQ 2618, page 5 / 10.1
- each gauge block is marked with an identification number
- calibration certificate by extra charge



ART NO steel	for micrometer sizes	tolerance class	quantity per set	nominal size mm	CC
350176	0 – 25	1	5	5.10 / 10.30 / 15.00 / 20.20 / 25	on request
350177	0 – 100	1	8	5.10 / 10.30 / 15.00 / 20.20 / 25 / 50 / 75 / 100	on request

Inspection Gauge Block Set, for Calipers

DIN EN ISO 3650

- for review and adjustment of pocket calipers acc. to VDI/VDE/DGQ 2618, page 5
- with hardened steel setting ring and protective gloves
- each gauge block is marked with an identification number
- calibration certificate without setting ring certificate by extra charge




ART NO ceramic	ART NO steel	tolerance class	Ø mm	nominal size mm	CC
350111	350139	1	20	30 / 41.3 / 131.4	on request
350118	350148	1	4 and 25	30 / 41.3 / 131.4	on request
—	350149	1	4 and 25	30 / 41.3 / 131.4 / 243.5	on request

Angle Gauge Block Set

Angle Gauge Block Set

- workshop quality, for standard purposes
- for fast, easy and accurate determination of angular dimensions
- hardened and relieved special steel, high grade of abrasion resistance
- measuring faces fine ground
- angle accuracy of measuring faces +/- 60°

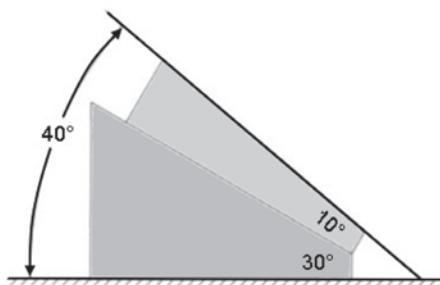

ART NO	tolerance class	quantity per set	angle sizes in °	L x H	CC
352012	1	12	0.25 / 0.5 / 1 / 2 / 3 / 4 / 5 / 10 / 15 / 20 / 25 / 30°	75 x 6.5	on request

Follow us on Facebook.

Never miss any news about our products, promotions and offers.



Any questions?
We are pleased to advise.

facebook.com/VogelGermany

Accessories for Parallel Gauge Blocks

Accessory Set for Gauge Blocks

- 8-piece set, contents:

- 1 pair of 2 mm half round jaws
- 1 pair of 5 mm half round jaws
- 1 scriber point, 1 centering tip
- 1 holder 0 – 50 / 0 – 100 / 100 – 200 mm
- 1 base for holder



content / pieces

ART No

353000

8

Gauge Block Holder

- for clamping individual gauge blocks
- special steel made



ART No 350313 – 350317

ART No 350310 – 350312



ART No

clamping range
mm

suitable base

350310	0 – 50	353020	—
350311	0 – 100	353020	—
350312	100 – 200	353020	—
350313	0 – 300	—	353021
350314	100 – 300	—	353021
350315	200 – 400	—	353021
350316	300 – 500	—	353021
350317	400 – 600	—	353021

Gauge Connector

- art.-no. 350360: for coupling gauge blocks > 100 mm
- art.-no. 350361: for coupling gauge blocks > 100 mm with gauges < 100 mm

ART No 350361

ART No 350360



Other sizes available
on request!

ART No

for sizes
mm

350360	> 100 + > 100
350361	0 – 180

Accessories for Parallel Gauge Blocks



Half rounded Measuring Jaws, in pair

- half round jaws for internal and external measurements
- hardened and relieved steel




ART No	nominal size Ø mm	max. measuring depth mm	total length mm
350327	2	10	40
350328	5	15	45
350329	10	40	70

Knife Edge Jaws, in pair



ART No	nominal size Ø mm	total length mm
350326	60	65

Steel Scriber Point



ART No

350350



Centering Point



ART No

350351

Measuring Jaws, in Pair



ART No	total length mm
353025	100

Accessories for Parallel Gauge Blocks

Maintenance Kit for Gauge Block

- for cleaning and maintenance of gauge blocks
- linen cloth, chamois leather, anti corrosion oil, deburring stone, soft brush, grease brush, operation manual

Option

- anti corrosion oil, single (art.-no.: 350306), for maintenance and cleaning of gauge blocks and other gauges, brings a protective film on the surface

ART N° 350306



ART N°

350301

ART N°

anti corrosion oil

350306

contents
ml

50

Maintenance Spray

- cleans, maintains and lubricates measuring tools, loosens caked-on section and conserves degreased mechanical connections
- acid and resin-free, compatible to environment, FCKW-free
- displaces humidity in electrical and electronical areas



ART N°

350320

contents
ml

500

→ mm ←

260 x ø 64

Universal Comparative Measuring Instrument, without Dial Indicator

NEW

- for measuring inside- and outside diameters of grooves, reverse turns, thread turns etc.
- with one fixed and one movable probe
- rugged construction, measuring table stainless, hardened
- measurement can be done by analogy dial indicator or by digital dial indicator
- different probes are available, interchangeable
- large application range, for comparison measurements
- dial indicator shank ø 8H7
- further accessories, e.g. calibrated gauge blocks or setting rings on request
- with instruction manual

Measuring Probes included

- stainless, hardened
- 1 pair of measuring probes art.-no.: 391010-01, ø 10 x 40 mm, spherical shaft, shaft ø 8 mm
- 1 pair of measuring probes art.-no.: 391010-02, ø 20 x 34 mm, probe reduced, shaft ø 8 mm



CE

NORM

ART N°

391010

→ mm ←
mm

100

→ mm ←
table mm

202 x 167 x 110

max.
mm

2.0

Granite Measuring and Control Plate

DIN 876

- particularly well selected material of highest quality, entirely faultless
- diamond lapped measuring surfaces, acc. to DIN 876

- extreme hard and wear resistant and acid resistant
- T-Slots acc. to DIN 650, made of steel, **on request**
- calibration certificate available on request



Option: T-slot, with extra charge



Other sizes or
special designed plates
are available on request!

grade of accuracy:
should be selected according to the intended purpose

grade 00	extra fine diamond lapped for the inspection room
grade 0	fine diamond lapped for control purposes
grade I	diamond lapped for workshop use

DIN

ART NO	accuracy $\pm \mu\text{m}$	ART NO	accuracy $\pm \mu\text{m}$	ART NO	accuracy $\pm \mu\text{m}$	mm
grade 00	accuracy $\pm \mu\text{m}$	grade 0	accuracy $\pm \mu\text{m}$	grade 1	accuracy $\pm \mu\text{m}$	
260199	2.0	260229	4.0	260259	12.0	250 x 250 x 50
260200	3.0	260230	6.0	260260	13.0	300 x 300 x 50
260201	3.0	260231	6.0	260261	14.0	400 x 250 x 60
260202	3.0	260232	6.0	260262	14.0	400 x 400 x 60
260203	3.0	260233	6.0	260263	15.0	500 x 500 x 80
260204	3.0	260234	7.0	260264	16.0	630 x 400 x 80
260205	3.0	260235	7.0	260265	16.0	630 x 630 x 80
260206	4.0	260236	7.0	260266	18.0	800 x 500 x 100
260207	4.0	260237	8.0	260267	20.0	1000 x 630 x 100
260208	4.0	260238	8.0	260268	20.0	1000 x 630 x 150
260209	4.0	260239	8.0	260269	20.0	1000 x 1000 x 100
260210	4.0	260240	8.0	260270	20.0	1000 x 1000 x 150
260211	4.4	260241	8.8	260271	22.0	1200 x 800 x 150
260212	4.4	260242	8.8	260272	22.0	1200 x 800 x 200
260213	5.0	260243	10.0	260273	25.0	1500 x 1000 x 150
260214	5.0	260244	10.0	260274	25.0	1500 x 1000 x 200
260215	6.0	260245	12.0	260275	30.0	2000 x 1000 x 200
260216	6.0	260246	12.0	260276	30.0	2000 x 1000 x 250

Stands for Granite and Ceramic Plates

Safety-Stands

SUVA-design

- solid angular steel construction, powder coated, grey (RAL 7001)
- for a working height of approx. 900 – 1000 mm adjustable
- with protective device against misalign
- 3-point support M 24 x 80 mm
- 4 foot-mounted M 16 pins with ø 80 mm diameter plate, stainless steel
- single packed on an Euro-pallet



ART NO	suitable for plate size mm	stand mm
260901	630 x 400	—
260902	630 x 630	—
260903	800 x 500	800 x 500
260904	1000 x 630	1000 x 630
260905	1000 x 1000	1000 x 1000
260906	1200 x 800	1200 x 800
260907	1500 x 1000	1500 x 1000
260908	2000 x 1000	2000 x 1000

Did you already know?

Join us for success is now

Measuring Solutions

The new slogan stands for even more Service, Solutions and Consulting.

VOGEL®
GERMANY
Measuring Solutions

Accessories for Measuring a. Control Instruments made of Granite

Levelling Jack

- for granite plates up to 1000 x 630 mm
- large adjusting range
- support in the ball joint



ART NO	quantity / singly	description	mm
269074	1	table adjustment	60 – 130 mm

Tailstock Pairs

Grade/0

- made of dense, aged and stress relieved special cast iron with high wear resistance
- one tailstock with stationary and one with axially adjustable tail spindle
- spindles and dead centres are hardened and precision ground
- sliding blocks with a nominal size of 14 mm
- tailstocks can be fixed to the T-slot with the help of an eccentric adjusting device



Option (special construction)
tailstocks with hand wheel, adjustment suitable for heavy work pieces.
Height adjustment possible through ground screw-thread with hand wheel (fine adjustment).

Notes

- hand wheel, adjustable by means of an adjustable tail pressure
- tail stocks can be delivered with or without hardened and precision ground 90° prisms (as option, with extra charge!)
- the prisms are needed for eccentrically shanks or for measuring of extra large shanks, which exceed over the length of the tail stock pair

Grade/00 and Grade/I available on request!

ART NO	center height mm	inside tape MT	total length mm	grade/0
269060-0	100	2	290	±0.008 mm
269061-0	150	2	360	±0.008 mm
269062-0	200	2	390	±0.008 mm
269063-0	250	3	490	±0.008 mm
269064-0	300	3	570	±0.008 mm

Granite Master Squares 90°, triangular

DIN 876/00 with regard to the flatness of the measuring surface
DIN 875-2/00 with regard to angularity

- particularly well selected material of highest quality, entirely faultless
- 2 diamond lapped measuring surfaces acc. to grade 00

- 90° angle machined
- extreme hard and wear-resistant, acid-resistant
- calibration certificate available on request
- incl. test certificate



DIN


ART NO	grade 00	max. ± μm		angle length mm	width mm
		flatness	angularity		
260500		2.4 / 2.3	2.0	200 x 150	50
260501		2.6 / 2.4	2.5	300 x 200	50
260502		2.8 / 2.5	3.0	400 x 250	60
260503		3.0 / 2.6	3.5	500 x 300	80
260504		3.3 / 2.8	4.0	630 x 400	80
260505		3.6 / 3.0	5.0	800 x 500	100
260506		4.0 / 3.2	6.0	1000 x 600	100

Measuring and Control Instruments made of Granite

Precision Gauge Blocks

DIN 876/00

- particularly well selected material of highest quality
- 2 diamond lapped measuring surfaces acc. to grade 00
- entirely faultless, from up 800 mm length with transport lugs
- calibration certificate available on request
- from 800 mm length with threaded core, without eyelet hook
- incl. test certificate



example




DIN

ART NO grade 00	parallelism	→ mm ←
260530	3.0	630 x 50 x 100
260531	4.0	800 x 50 x 120
260532	4.0	1000 x 60 x 150
260533	5.0	1200 x 60 x 180
260534	6.0	1500 x 70 x 200
260535	6.0	2000 x 80 x 250

Precision Pair of Parallels

DIN 876/00

- particularly well selected material of highest quality
- 2 measuring surfaces parallel machined as a pair acc. to grade 00
- entirely faultless
- calibration certificate available on request
- incl. test certificate

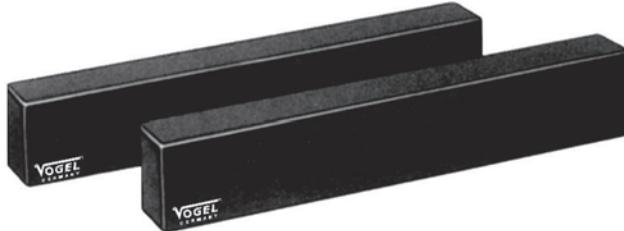

DIN

ART NO grade 00	parallelism	→ mm ←
260550	2.0	100 x 15 x 25
260551	2.0	150 x 20 x 30
260552	2.0	200 x 25 x 40
260553	2.0	250 x 30 x 50
260554	3.0	300 x 40 x 70
260555	3.0	400 x 50 x 100

Maintenance Set for Granite Plates

- consisting of cleaner and care oil
- environmentally friendly
- cleaner protects, maintains and extends the life of granite surfaces
- care oil ensures easy sliding of workpieces and works for wear reducing

Other volumes
are available, on request!



ART NO	cleaner content ltr.	care oil content ltr.	cleaner concentrate content ltr.
260299	0.5	0.5	—


Measuring and Control Instruments made of Granite

Granite Master Squares 90°, chimney shape

DIN 876/00 with regard to the flatness of the measuring surface
DIN 875-2/00 with regard to angularity

- particularly well selected material of highest quality acc. to grade 00

- entirely faultless, extreme hard and wear-resistant, acid-resistant
- base and 2 small measuring surfaces
- calibration certificate available on request
- incl. test certificate

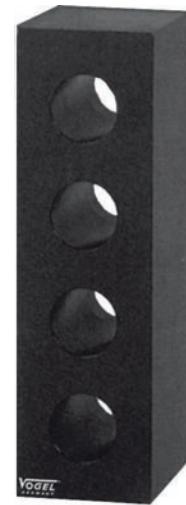

DIN


ART NO	grade 00	 $\pm \mu\text{m}$		
		parallelism	angularity	
260520		2.6	2.5	300 x 100 x 80
260521		3.0	3.5	500 x 150 x 120
260522		3.6	5.0	800 x 220 x 150
260523		4.0	6.0	1000 x 250 x 200

Granite Master Squares 90°, square shape

DIN 876/00 with regard to the flatness of the measuring surface
DIN 875-2/00 with regard to angularity

- particularly well selected material of highest quality
- measuring surfaces acc. to grade 00

- entirely faultless, extreme hard and wear-resistant, acid-resistant
- measuring surfaces absolut plane and rectangular finely ground quality
- calibration certificate available on request
- incl. test certificate

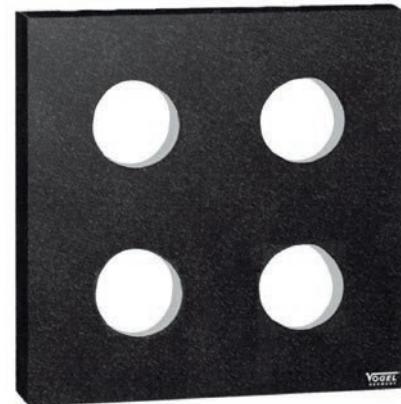

DIN

ART NO	grade 00	 $\pm \mu\text{m}$		
		squareness	straightness	
260580		2.4	2.0	200 x 200 x 25
260582		2.6	2.5	300 x 300 x 30
260584		3.5	3.5	500 x 500 x 50

Straightening Plates

Straightening Plates

- solid or ribbed construction
- special wear resistant steel casting
- surfaces and four sides fine planed
- against extra charge the plates can be also supplied with bores, holes or T-slots



ART NO solid	→ mm ←
261400	200 x 200 x 40
261401	300 x 300 x 50
261402	400 x 400 x 50
261403	500 x 500 x 60
261404	600 x 600 x 70
261405	700 x 700 x 80
261406	800 x 800 x 100
261407	1000 x 800 x 100
261408	1000 x 1000 x 110
261409	1200 x 800 x 80
261410	1200 x 1000 x 110
261411	1500 x 1000 x 120
261412	2000 x 1000 x 120

ART NO ribbed	→ mm ←	rib height mm
261500	200 x 200 x 20	40
261501	300 x 300 x 20	40
261502	400 x 400 x 20	40
261503	500 x 500 x 40	40
261504	600 x 600 x 40	40
261505	700 x 700 x 40	40
261506	800 x 800 x 40	40
261507	1000 x 800 x 40	60
261508	1000 x 1000 x 40	60
261509	1200 x 800 x 60	60
261510	1200 x 1000 x 60	60
261511	1500 x 1000 x 60	60
261512	2000 x 1000 x 60	60

Stands

- suitable for straightening plates
- solid steel construction
- for a working height of approx 800 mm
- quantity of legs 4 pcs.



ART NO	for straightening plate size mm
269102	400 x 400
269103	500 x 500
269104	600 x 600
269105	700 x 700
269106	800 x 800
269107	1000 x 800
269108	1000 x 1000
269109	1200 x 800
269110	1200 x 1000
269111	1500 x 1000
269112	2000 x 1000


Lapping-, Control-, Surface- and Testing Plates and Accessories

Lapping and Control Plate

DIN 876/1

- for lapping, flatness measuring and as base line

- special high-density cast iron
- top and bottom surfaces finest ground
- upper surface is additionally squared, with dust grooves

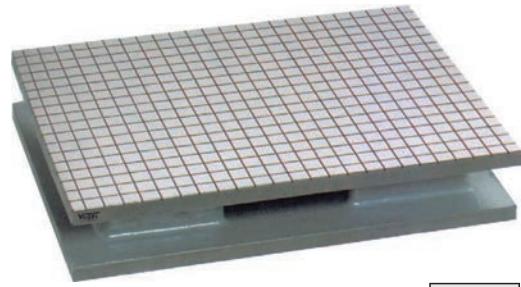

DIN

ART NO	→ mm ←	eveness mm	ART NO wooden box
262101	360 x 260 x 65	0.014	2699036

Control-, Surface- and Testing Plates


DIN 876

- special wear-resistant casting with additionally steel

- strong ribbed construction, side surfaces reinforced
- measuring surface according to DIN 876
- side surfaces carefully planed or milled
- with supporting points, corresponding to the size of plate
- against extra charge we supply the plates with handle and with protective wooden cover

Other sizes are
available on request!

grade 0 = fine scraped and finished
grade 1 = fine finished
grade 3 = fine planed

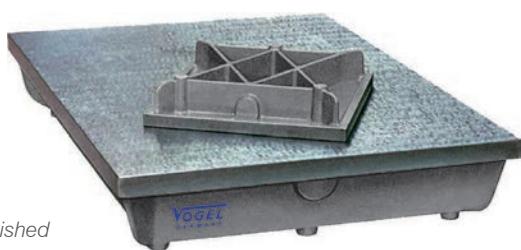

DIN

ART NO grade 0	ART NO grade 1	ART NO grade 3	ART NO pair of handle	ART NO wooden cover	→ mm ←
261002	261102	261302	269070	2699020	200 x 200
261005	261105	261305	269070	2699030	300 x 300
261007	261107	261307	269070	2699040	400 x 400
261008	261108	261308	269071	2699054	500 x 400
261009	261109	261309	269071	2699050	500 x 500
261011	261111	261311	269071	2699065	600 x 500
261014	261114	261314	—	2699085	800 x 500
261018	261118	261318	—	2699160	1000 x 600
261020	261120	261320	—	2699180	1000 x 800
261021	261121	261321	—	2699100	1000 x 1000
261022	261122	261322	—	2699128	1200 x 800
261024	261124	261324	—	2699157	1500 x 1000
261026	261126	261326	—	2699210	2000 x 1000

Supporting Feet

- especially for straightening plates

- made of special casting
- with adjusting screw



ART NO	stand height mm	adjusting height mm
269076	250 – 300	50
269077	350 – 400	50
269078	450 – 500	50
269079	550 – 600	50
269081	650 – 700	50

Angle Plates


Angle Plates

DIN 875 and DIN 876


• construction with clamping slots or with clamping T-slots

- made of special cast iron with high resistance to wear
- accuracy of measuring surfaces according to DIN 876
- accuracy of angle according to DIN 875
- side areas carefully milled
- T - Slots acc. to DIN 650 machined in H12

ART No 261704

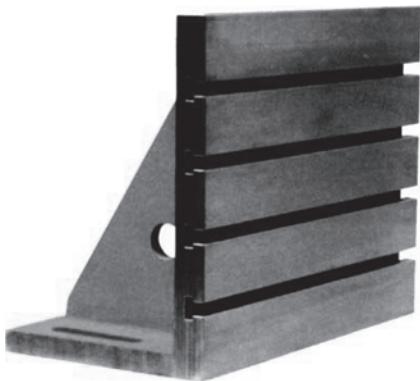

ART No 261604

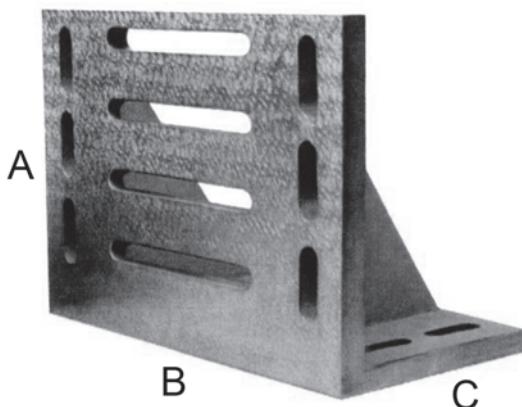

Other sizes are
available on request!

DIN

ART No
slots
grade 1

261600	261640
261601	261641
261602	261642
261603	261643
261604	261644
261605	261645
261606	261646
261607	261647
261608	261648
261609	261649
261610	261650
261611	261651

ART No
slots
grade 3

261740	261741
261742	261743
261744	261745
261746	261747
261748	261749
261750	

→ mm ←

B x A x C

slot width
mm

150 x 100 x 75	14
200 x 150 x 100	15
275 x 200 x 150	17
300 x 250 x 150	17
400 x 300 x 225	20
500 x 400 x 300	26
600 x 500 x 350	24
700 x 520 x 390	24
800 x 600 x 450	24
1000 x 800 x 600	30
1200 x 1000 x 700	30
1500 x 1250 x 900	30

ART No
T-slots
grade 1

261700	261740
261701	261741
261702	261742
261703	261743
261704	261744
261705	261745
261706	261746
261707	261747
261708	261748
261709	261749
261710	261750

ART No
T-slots
grade 3

261740	261741
261742	261743
261744	261745
261746	261747
261748	261749
261750	

→ mm ←

B x A x C

T-slot width
mm

150 x 100 x 75	10
200 x 150 x 100	12
300 x 250 x 150	12
400 x 300 x 225	18
500 x 400 x 300	18
600 x 500 x 350	18
700 x 520 x 390	22
800 x 600 x 450	22
1000 x 800 x 600	22
1200 x 1000 x 700	22
1500 x 1250 x 900	22

Precision Inspection Spirit Levels

Precision Inspection Spirit Levels

DIN 877

- for accurate levelling and adjusting of surfaces and cylinders

- housing made of special cast iron
- with prism and flat surface, finely ground
- adjustable main vial and one cross vial
- with insulation handles

ART No 360281



ART No 360202



DIN

ART No sensitivity 0.01 mm/m	ART No sensitivity 0.02 mm/m	ART No sensitivity 0.05 mm/m	length mm	CC
—	360281	360282	150	on request
360202	360283	360284	200	on request
360203	360285	—	250	on request
360204	360287	360288	300	on request

ART No sensitivity 0.1 mm/m	ART No sensitivity 0.3 mm/m	ART No sensitivity 0.5 mm/m	length mm	CC
—	—	360261	150	on request
360251	360231	—	160	on request
360252	360232	360262	200	on request
360253	360233	—	250	on request
360254	360234	360264	300	on request

Precision Inspection Frame Spirit Levels

DIN 877

- for levelling and adjusting of horizontal and vertical surfaces and cylinders

- housing made of special cast iron
- with prism and flat surface, fine ground
- adjustable main vial and one cross vial
- with insulation handles



DIN

ART No sensitivity 0.02 mm/m	ART No sensitivity 0.05 mm/m	ART No sensitivity 0.1 mm/m	→ mm ←	CC
360311	360312	360351	150 x 150 x 40	on request
360313	360314	360352	200 x 200 x 40	on request
360315	360316	—	250 x 250 x 40	on request
360317	—	360353	300 x 300 x 40	on request

Precision Inspection Spirit Levels

Precision Crank Pin Levels

DIN 877

- to adjust crankshafts and crank pins of motors and machines

- with vertical and horizontal prism, fine ground
- with main vial and cross vial
- width 40 mm

Option

- with magnets in the prism bottom on request, please



DIN

ART NO sensitivity 0.04 mm/m	ART NO sensitivity 0.1 mm/m	ART NO sensitivity 0.2 mm/m	length mm	CC
—	—	360295	60	on request
360296	—	—	90	on request
360297	—	—	120	on request
—	360293	—	90	on request
—	360294	—	120	on request

Precision Alloy Spirit Level

- for simple levelling and adjusting of surfaces and cylinders

- housing made of alloy cast
- with ground prism base
- with ground and graduated main vial



NORM

ART NO sensitivity 0.6 mm/m	length mm	width mm	ART NO sensitivity 0.6 mm/m	length mm	width mm	CC
360410	100	22	360420	200	22	on request
360415	150	22	360430	300	22	on request

Did you already know?

Join us for success is now
Measuring Solutions
The new slogan stands for even more
Service, Solutions and Consulting.

VOGEL®
GERMANY
Measuring Solutions

Precision Parallel Support Sets

- 14 pairs of parallels

- special steel, carefully hardened and strain-removed, HRC 58 – 60
- longitudinal surfaces are plane parallel machined and extra fine adjusted in pairs



ART NO	sizes mm	→ mm ←	accuracy for height ± mm
260600	14 / 16 / 18 / 20 / 22 / 24 / 26 / 28 / 30 / 32 / 35 / 40 / 45 / 50	150 x 10 ± 0,05	0,01

Precision Parallel Support Sets, magnetic NEW

- hardened (~60 HRC), black anodized
- with magnetic inserts,
reduce the clamping time by up to ~ 10
- fine ground in pair, as set of each 5 pairs
- scratch-resistant, black anodized surface



Application example



ART NO	sizes mm	height tolerance ± mm	width tolerance ± mm	→ mm ←
260620	15 / 22 / 25 / 30 / 32	0.005	0.01	90 x 2.5
260621	15 / 30 / 35 / 37 / 39	0.005	0.01	125 x 2.5
260622	25 / 35 / 40 / 45 / 47	0.005	0.01	150 x 2.5



**Send us a
partnership request**



OXOMI.com



Complete catalogue
assortment searchable
on OXOMI.com



Measuring Instruments



Hardness Testers	280 – 282
Accessories for Hardness Testers	283
Universal Coating Thickness Gauges.....	285 – 286
Ultrasonic Thickness Gauges	286 – 288
Accessories for Coating and Material Thickness Measuring Devices.....	289
Vibration Meters	291
Digital Hand Tachometers.....	292
Hand Tachometers, accessories.....	293
Digital Stroboscopes • IP65	293
Digital Force Gauges	294
Precision Scales, Compact Scales, Platform Scales.....	294 – 297
Hanging Scales.....	298 – 299
Test Weights for Scales	299
Voltage Testers, Current Clamps.....	300 – 301
Digital Multimeters.....	302
Magnet Testers, Brake Fluid Testers, Automotive Voltage Testers.....	304
Digital Thermometer, Temperature Probes	305
Infrared Laser Thermometers.....	306
Digital Moisture Meters	307
Digital Sound Level Meters, Lux Meters, Anemometers.....	308
Digital Surface Roughness Measuring Devices.....	309 – 310
Surface Finish Specimen „RUGOTEST“	309
Photo/Video Endoscopes	311 – 312

Image Directory • Measuring Instruments

				
Page 280	Page 280	Page 281	Page 281	Page 281
				
Page 282	Page 282	Page 282	Page 283	Page 283
				
Page 283	Page 283	Page 283	Page 283	Page 283
				
Page 283	Page 283	Page 283	Page 283	Page 283
				
Page 285	Page 285	Page 286	Page 286	Page 286
				
Page 287	Page 287	Page 288	Page 289	Page 289
				
Page 289	Page 289	Page 289	Page 289	Page 289

Image Directory • Measuring Instruments


				
Page 291	Page 291	Page 292	Page 292	Page 293
				
Page 293	Page 293	Page 293	Page 293	Page 293
				
Page 293	Page 293	Page 293	Page 293	Page 294
				
Page 294	Page 295	Page 295	Page 295	Page 296
				
Page 296	Page 297	Page 297	Page 298	Page 298
				
Page 298	Page 298	Page 299	Page 299	Page 299
				
Page 300	Page 300	Page 301	Page 301	Page 302

Image Directory • Measuring Instruments

				
Page 302	Page 304	Page 304	Page 304	Page 305
				
Page 305	Page 305	Page 305	Page 305	Page 305
				
Page 305	Page 305	Page 306	Page 306	Page 306
				
Page 306	Page 306	Page 307	Page 307	Page 307
				
Page 308	Page 308	Page 308	Page 308	Page 309
				
Page 309	Page 309	Page 309	Page 310	Page 310
				
Page 310	Page 310	Page 310	Page 310	Page 311

Image Directory • Measuring Instruments



Page 312



Page 312



Hardness Testers

BARCOL Impressor, Hardness Tester

- portable device, one hand use, for fast and location independent hardness testing
- with Bluetooth® data output and with software
- Applications:**
It is mainly used in aluminium processing industry, testing pure aluminium, soft aluminium, thick aluminium alloy, aluminium strip, aluminium rod, aluminium castings, aluminium forgings and aluminium alloy products. Also, it can be used for glass steel industry.
The device is suitable for testing large and extra thick workpieces.

- rugged ABS plastic housing, with key pad, with backlight
- LCD display with clear reading, digit height 9 mm
- LED signals for the hardness scales HW, HB HV, HRB, HRE, HRF, HRH
- with function of calculation the average value, can calculate the average value of 29 sets of data at most
- with the max. hold function, recording the max. hardness value during measurements
- with good, convenient calibration and high accuracy detection
- wide test range, can test from very soft pure aluminium to a particularly hard aluminium alloy, effective test range equivalent to the Brinell Hardness 25 ~ 150 HB
- ON/OFF-button, autom. power off, average, max value, menu function
- operation temperature -0 °C ~ +50 °C, rel. humidity 20 – 80 %RH
- incl. 2x 1.5 V battery (type AAA, art.-no.: 90002)
- incl. 2 test blocks, 2 pins, pin length calibration block, screw driver, spanner, installation software for data transmitting and operation manual




ART NO	HBa	HBa	max. Hba	max. Hba	max. Hba	max. Hba	mm
650270	0 – 100	0.1	81 – 88 ± 1	42 – 48 ± 2	81 – 88 ± 1.5	42 – 48 ± 2.5	170 x 60 x 70

Universal Digital Rebound Hardness Tester

- with integrated impact device type „D“, portable device without cable connection
- measurement is based on the principle of Leeb

- hand-held device, rugged, polyamide housing material, with self-calibration function
- LCD display with clear reading and backlight, digit height 9 mm
- autom. power off, memory with 99 data
- suitable for testing hardness of almost all Ferrous (Fe) and Non-Ferrous (NFe) materials
- direct display of hardness scales: HL, HRC, HRB, HB, HV and HS
- statistics function: average / min. / max. / value
- provides testing at any angle, even upside down
- min. workpiece weight 2 ~ 5 kg on a solid ground, at 0.05 ~ 2 kg with couplant paste
- for indentation depth see techn. data of the impact devices on page 309
- min. radius workpiece (concave/convex) Rmin. = 50 mm, with support ring Rmin. = 10 mm
- min. surface roughness of workpiece 1.6 µm (Ra)
- storage temperature -20 °C ~ 70 °C, operation temperature -10 °C ~ 45 °C
- incl. cleaning brush, test block with HLD value and with calibration certificate
- incl. 1x 9 V battery (type 6LR61, art.-no.: 90006) and operation manual



ART NO	HL / 19 – 68 HRC 13 – 101.7 HRB / 20 – 655 HB 80 – 940 HV / 32 – 99.5 HS	(HL = 800 / ± 0.2 HRC) ± 0.6 %	mm	CC
651609	200 – 960 HL / 19 – 68 HRC 13 – 101.7 HRB / 20 – 655 HB 80 – 940 HV / 32 – 99.5 HS	± 0.6 %	100 x 60 x 33	inclusive

Universal Digital Rebound Hardness Tester

- portable device for quick and location-independent hardness tests, based on the Leeb principle
- with external impact device type „D“ (standard)
- with USB data output and Dataview software

- rugged, anodized aluminium housing, with key pad
- multifunction display with clear reading, with switchable backlight
- display functions: hardness scales, hardness value, date, testing time, battery indicator, impact direction, average value, recognition of impact device, memory capacity for 600 groups
- suitable for most metallic materials, measuring in any position, vertical, horizontal and upside down
- ON/OFF switch or autom. power off
- incl. Adjusting limit function, autom. alarm function when exceeding the limit value
- min. workpiece weight 2 kg on solid support
- direct display of hardness scale in HL, with autom. conversion in HRB, HRC, HV, HB, HS
- and tensile strength (U.T.S.)
- min. workpiece radius (concave/convex) Rmin = 30 mm (< 30 mm with support ring, incl. in the set)
- operation temperature -20 °C ~ +60 °C, rel. humidity 20 – 90 %RH
- incl. 2x 1.5 V Battery (type AA, art.-no.: 90003)
- incl. test block type „D“ (2 parts) and impact device type „D“, more impact devices are available as accessories
- with brush, USB data cable, screw driver, data view software, workshop calibration certificate and operation manual

art.-no. 651608 with additional functions:

- anti-slip soft shell housing
- integrated thermal printer for direct printing of all values and histogram
- with rechargeable Li-ion battery and charger 100 – 240 V/AC



ART No 651617



ART No 651608



ART No	at least workpiece thickness mm	max. hardness of workpiece HLD	HLD	mm	
651617	impact device type D/DC/DLD/D+15 = 5 mm impact device type C = 1 mm impact device type G = 10 mm	960	±6	130 x 70 x 30	inclusive
651608	impact device type D/DC/DLD/D+15 = 5 mm impact device type C = 1 mm impact device type G = 10 mm	960	±6	230 x 86 x 46	inclusive


Hardness Reference Blocks for all Testing Scales

- with DAkkS calibration certificate (MPA Hannover)

- manufactured acc. to the patented HIP-procedure (hot isostatic pressing)
- polished surface, means even for micro testing method

Option

- more blocks for other testing methods available, all blocks in other dimensions available

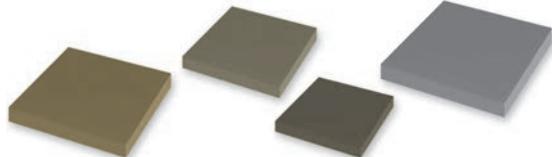

DIN EN ISO **ASTM** **CC**

ART No	testing method	range of hardness	useable test field mm ²	mm	
650950	HRA	40 – 83.4 HRA	3600	60 x 60 x 16	inclusive
650951	HRB	60 – 100 HRB	3600	60 x 60 x 16	inclusive
650952	HRC	20 – 65 HRC	3600	60 x 60 x 16	inclusive
650953	HV 0.01 – HV 30	140 – 840 HV	3600	60 x 60 x 16	inclusive

Hardness Testers

Shore Hardness Tester „Durometer“ • analog model

- portable device for measuring the hardness for elastomers and plastics
- Shore „A“: rubber, elastomers, neoprene rubber, silicon, vinyl, soft plastics, leather, felt and similar materials
- Shore „D“: plastic, formica, plexiglass, epoxies and similar materials
- rugged metal housing, compact design
- with drag pointer, with needle protection
- 2 different models, for Shore „A“ and Shore „D“ measurements
- measuring needle made of special steel, needle guidance is linear mounted
- incl. test block, with operation manual



with needle protection

DIN ASTM

ART NO	shore type	max. spring load N	→ [mm] ←	needle ° / mm	meas.-face mm	indentor type	→ [mm] ←
650720	A	8.064	0 – 100 HA	1.0	35° / ø 0.9	ø 18	blunt taper
650721	D	44.54	0 – 100 HD	1.0	30° / R 0.1	ø 18	sharp point

Test Stand for Shore Hardness Testers

- Suitable for series art.-no. 650720 – 650721

- rugged construction
- chromed and polished column
- with hand lever
- incl. additional weight (1 kg)



example with hardness tester



ART NO	ground plate mm	column mm	working height mm
659210	180 x 180 x 15	ø 25 x 285	100

Test Blocks for Shore Hardness Testers



ART NO	article	shore type	shore value	→ [mm] ←
650919	set of test blocks, 3-pcs.	A + D	50 / 80 / 40	—
650920	test block	A	50	80 x 40 x 12
650921	test block	A	80	80 x 40 x 12
650922	test block	D	40	80 x 70 x 7

Impact Devices for Special Applications

- suitable for our hardness testers



reference

impact body „G“ suitable for impact device „G“
impact body „D“ for all other impact devices

ART No	suitable for version	article description	application
659892	type "D"	impact device "D"	standard impact device. for the majority of hardness testing assignments
659893	type "C"	impact device "C"	device with reduced energy (~1/4 of that for type D), thin walled or impact sensitive components
659894	type "DC"	impact device "DC"	extremely short impact device
659895	type "D+15"	impact device "D+15"	impact device with particularly slim front section and with measuring coil moved back
659896	type "DL"	impact device "DL"	tube front section diameter ø 4.2 mm, length 50 mm
659897	type "G"	impact device "G"	enlarged test tip, increased impact energy (~9 x that of type D), with only minor damage to the surface
659890	type "D"	impact body "D"	for measurements in the extremely high hardness range up to 500 HRC/650 HV. Tool steel with high carbide content inclusions for measurements up to 1200 HV
659891	type "G"	impact body "G"	for measurements in the extremely high hardness range up to 500 HRC/650 HV. Tool steel with high carbide content inclusions for measurements up to 1200 HV
659893-2	type "C"	impact body "D"	for surface hardened elements, coatings, thinly coated or impact sensitive parts
659894-2	type "DC"	impact body "D"	for standard measurements in holes, cylinders, inside measurements, etc.
659895-2	type "D+15"	impact body "D"	for general measurements in narrow grooves and on narrow surfaces (e.g. gears)
659896-2	type "DL"	impact body "D"	for measurements in inaccessible places and recesses
651690	all models	support rings with holder, set of 11-pcs.	on curved surfaces with a radius under 30 mm, effective positioning, rings can be screwed on front of the impact device
651698-2	65 1698-1	printer cable	—
651698-3	65 1606	data cable USB to PC and RS232 C	—
651692-1	all models with data output	software for data process	data view/statistics
651699	all models	cable with Lemo connector	replacement cable for impact device
659899	all "D" versions	test block "D", with application of HLD value	for performance tests of hardness testers
659899-2	all "D" versions	test block "D", with application of HRC value	for performance tests of hardness testers
659913	651607 + 651608	paper roll	—

Accessories for Hardness Testers, Technical Data

Impact Devices for Special Applications • Technical Data

Hardness Parameters and Materials versus range for impact devices type „D“ (HLD 200–900)


Material	HLD	HRB	HRA	HRC	HB	HV	HS
steel and cast steel	300 – 900	39 – 100	59 – 86	20 – 68	81 – 654	81 – 955	32 – 100
cold work tool steel	300 – 840	—	—	20 – 67	—	80 – 898	—
stainless steel	300 – 800	46 – 101	—	20 – 62	85 – 655	85 – 802	—
grey cast iron	360 – 650	—	—	—	93 – 334	—	—
nodular cast iron	400 – 660	—	—	—	131 – 387	—	—
aluminium alloys	200 – 570	24 – 34	—	—	27 – 164	—	—
brass	200 – 550	13 – 95	—	—	40 – 173	—	—
bronze	300 – 700	—	—	—	60 – 290	—	—
copper	200 – 690	—	—	—	45 – 315	—	—

the ranges are stipulated by the application limits of the relevant static procedure

type of impact device	D / DC / DL	D+15	C	G
impact energy: weight:	11 Nmm 5.5 g / DL = 7.3 g	11 Nmm 7.8 g	3 Nmm 3.0 g	90 Nmm 20 g
test tip hardness: diameter: material:	1600 HV 3 mm	1600 HV 3 mm	1600 HV 3 mm Hartmetall	1600 HV 5 mm
impact body diameter: length: weight:	20 mm 147 / 86 mm 75 / 50 g	20 mm 162 mm 80 g	20 mm 141 mm 75 g	30 mm 254 mm 250 g
max. hardness of sample:	940 HV	940 HV	1000 HV	650 HV
preparation of surface roughness class ISO: max. roughness Rt: average roughness Ra	N7 10 µm 2 µm	N7 10 µm 2 µm	N5 2.5 µm 0.4 µm	N9 30 µm 7 µm
min. weight of sample solid and compact shape: on solid support/ground: with couplant paste:	5.0 kg 2.0 kg 0.1 kg	5.0 kg 2.0 kg 0.1 kg	1.5 kg 0.5 kg 0.02 kg	15 kg 5 kg 0.5 kg
min. thickness of sample coupled with copulant paste: min. thickness of hardened layers:	3.0 mm 0.8 mm	3.0 mm 0.8 mm	1.0 mm 0.2 mm	10.0 mm

indentation of test tip

at 300 HV diameter: depth:	0.54 mm 24 µm	0.54 mm 24 µm	0.38 mm 12 µm	1.03 mm 53 µm
at 600 HV diameter: depth:	0.45 mm 17 µm	0.45 mm 17 µm	0.32 mm 8 µm	0.90 mm 41 µm
at 800 HV diameter: depth:	0.35 mm 10 µm	0.35 mm 10 µm	0.30 mm 7 µm	—

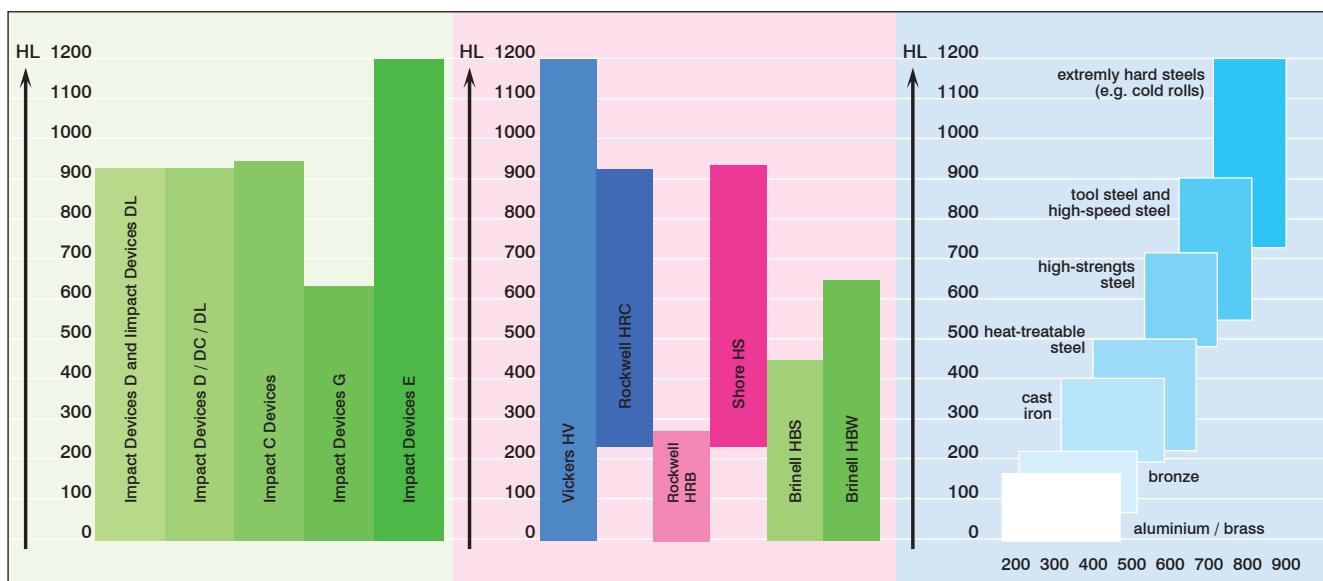


Universal Coating Thickness Gauges

Universal Coating Thickness Gauge

- professional, handheld measuring device for quick and flexible coating thickness measurements
- combined system with 2 probes, for iron/steel (Fe) and non-ferrous metal (NFe)
- large display, with backlight (switchable), with memory function
- rugged extruded aluminium case, USB data output and with dataview software
- operates in any position (horizontal, vertical and upside down)
- for measurements of non-magnetic layers on metal surfaces (Fe) and measurements of insulating layers on non-ferrous metals (NFe)
- application fields include surface engineering, automotive industry, electroplating, pipeline construction, aluminium industry, spray coating, plastic coating, mechanical engineering, bridge construction, etc.
- rugged extruded aluminium body frame, with soft key pad
- multi-function display with clear reading, with backlight switchable
- with „low-battery“ indicator, autom. recognition of probe type, alarm function switchable
- magnetic induction measuring principle (Fe) and eddy current measuring principle (NFe)
- units in μm or mils, autom. substrate recognition, manual or autom. shut down function
- two measuring methods: continuous measurement and a single measurement
- 3 calibration methods: one point calibration, two point calibration and calibration with a roughened surface
- 5 calibration foil-set, 1 x aluminium substrate block and 1 x iron substrate block
- 5 statistical values: mean value, max. value, min. value, standard deviation and numbers of measurements, storage of 500 measuring data in total
- min. radius of workpiece: convex 5 mm, concave 50 mm
- min. substrate thickness Fe (F1)-probe 0.75 mm, for NFE (N1)-probe 50 μm
- direct printing of the measured values by USB cable to PC or printer
- operating temperature -0 °C ~ 40 °C, rel. humidity 20 – 90 %RH
- inclusive 2x 1.5 V battery (type AA, art.-no.: 90003), with screw driver, data cable, dataview software, operation manual



Accessories
on page 289




ART NO						
480227	0.1 / 0.1	0 – 1250	1 + 3 %	1.5 + 3 %	115 x 70 x 30	

Universal Paint Thickness Gauge • IP52

- professional, handheld device for quick and accurate paint thickness measurements
- device with built-in probe for quick, non-destructive and accurate measurements
- integrated probe for measurements on smooth, painted areas
- combined system for measurements on iron/steel (Fe) and non-ferrous metal (NFe) both of these offer the highest degree of precision even with thinnest paint coatings
- large display, 4 digits, alphanumeric, height 8 mm
- in a rugged ABS plastic housing, with rubber protective cover
- easy single key operation, just switch on and measure, autom. base material recognition
- for measurements on level or slightly curved surfaces
- no calibration necessary, calibrated before delivery
- area of application: painting companies, spray- and powder coating, automotive companies, experts and automotive garages, oldtimer scene, machinery, aluminium industry, etc.
- rugged ABS plastic housing, with rubber protective cover, with key pad
- innovative and user friendly handling: switch on and measure
- multi-function LCD display with clear reading, autom. recognition of base material
- large contact area for reliable positioning
- magnetic induction measuring principle (Fe) and eddy current measuring principle (NFe) reading in μm and mil
- calibration-free measuring, acoustic signal when recording measured values
- control foil and zero-standards (1 x aluminium- and 1 x steel plate)
- min. radius workpiece for convex surfaces 25 mm, for concave surfaces 50 mm
- min. thickness of workpiece — F 0.75 mm, min. thickness of workpiece — N 0.25 mm, min. measuring surface 40 x 40 mm
- operating temperature 0 °C ~ 60 °C, rel. humidity 20 – 90%RH, surface temperature -15 °C ~ 60 °C
- incl. 2x 1.5 V battery (type AAA, art.-no.: 90002)
- with operation manual



application example



ART NO								
480238	1.0 / 2.0 / 5.0	0 – 3000	0 – 3000	3 + 5 %	integrated		110 x 50 x 25	


Coating Thickness Gauges and Ultrasonic Thickness Gauges

Universal Coating Thickness Gauge • IP52

- professional, handheld device for quick and flexible coating thickness measurements
- device available with built-in probe or with external probe for flexible measurements
- combined system for measurements of non-magnetic layers on metal surfaces (Fe) and for measurements of insulating layers on non-ferrous metals (NFe)
- large display, 4 digits, alphanumeric, height 10 mm
- no calibration necessary, calibrated before delivery
- highly wear-resistant measuring pole made of tungsten carbide
- in a rugged ABS plastic housing, with rubber protective cover
- operates in any position (horizontal, vertical and upside down)
- application fields: painting companies, spray- and powder coating, automotive experts and automotive garages, steel- and automotive companies and shipbuilding, machinery, electro plating, aluminium industry, in laboratories, quality control, etc.
- rugged ABS plastic housing, with rubber protective cover, with key pad
- innovative and user friendly handling: switch on and measure
- multi-function LCD display with clear reading, autom. recognition of base material
- plastic base of the probes are shaped with a V-groove, thus ensuring vertical positioning on flat, cylindrical or curved surfaces
- magnetic induction measuring principle (Fe) and eddy current measuring principle (NFe) reading in μm and mils
- calibration-free measurements, online statistics (mean values, standard deviations, min, max)
- acoustic signal when recording measured values
- control foil and zero-standards (1x aluminium- and 1x steel plate)
- min. radius workpiece for convex surfaces 5 mm, for concave surfaces 50 mm
- min. thickness of workpiece for Fe probe 0.5 mm, for NFe probe 50 μm , min. measuring surface 10 x 10 mm
- operating temperature 0 °C ~ 60 °C, rel. humidity 20 – 90 %RH, surface temperature -15 °C ~ 60 °C
- incl. 2x 1.5 V battery (type AAA, art.-no.: 90002)
- with operation manual and wrist strap



application example





ART No	μm	μm Fe	μm NFe	$\pm \mu\text{m}$	mm probe	
480236	1.0 / 2.0 / 5.0	0 – 3500	0 – 3000	2 or 2 %	built-in	110 x 50 x 25
480237	1.0 / 2.0 / 5.0	0 – 3500	0 – 3000	2 or 2 %	Ø 24 x 45	110 x 50 x 25

Ultrasonic Thickness Gauge

- Top-model, for various materials, such as steel, stainless steel, glass, gold, silver, non-ferrous metals, nylon, polyethylene, polystyrene, teflon, rubber, plexiglass, titanium, platinum, neoprene, a.m.o.
- pocket size instrument, for quick and flexible wall thickness measurements
- operates in any position (horizontal, vertical and upside down)
- easy to operate device, with automatic probe zero calibration
- rugged polyamide plastic housing, automatic probe identify system
- with touchscreen soft key pad, with low-high limit setting and alarm signal
- resolution in 0,01 mm/0,001" or 0,1 mm/0,01", measurements 4/s and 10/s in „fast mode“
- fast calibration on integrated 4 mm test plate (Ø 15 mm)
- 4-digit LCD-display with clear reading and backlight display for dark environment
- incl. interchangeable 5 MHz standard transducer (< 60 °C) with Ø 10 mm, for general purpose
- operating temperature -20 °C ~ + 50 °C, measuring temperature -20 °C ~ 350 °C (acc. to the probes)
- with average calculation of max. 9 readings, memory of 5.000 reading with location number
- with „low battery“ indicator, autom. power off selectable, measuring unit in mm/inch switchable
- with selectable sound velocity range from up 1.000 m/s ~ 9.999 m/s
- with installation software on CD-Rom
- with USB data output to PC
- with 2x 1.5 V battery (type AAA, art.-no.: 609283), couplant, hand strap, operation manual
- incl. workshop calibration certificate, in sturdy plastic case

Accessories on
page 289

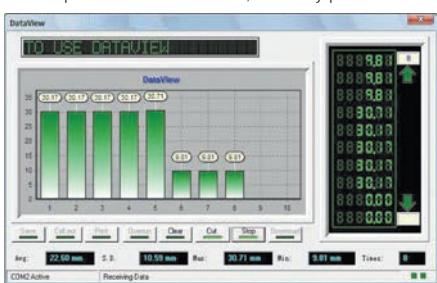

ART No	$\mu\text{m} / \text{inch}$		max.	$\rightarrow \text{mm} \leftarrow$	CC
480101	0.65 – 400 mm / 0.026 – 15.7"	0.1/0.01 mm / 0.01/0.001"	0.5 % +0.1	116 x 64 x 24	inclusive



Ultrasonic Thickness Gauges

Ultrasonic Thickness Gauge

- compact handheld measuring device for quick and location independent measuring
- with 2 external probes
- dedicated for many materials, such as steel, cast iron, nodular cast iron, aluminium, bronze, copper, zinc, etc., ceramic, glass, composites, epoxies, homogenously plastics, other ultrasonic wave well conductive materials
- large LCD display, 4-digit, in a rugged ABS plastic housing
- operates in any position (horizontal, vertical and upside down)
- with integrated steel test plate for fast calibration
- areas of application e. g.: surface technology, automotive-, metal-, machinery- and aluminium-industry, storage tanks, pressure boiler, shipbuilding, bridge construction corrosion tests, etc.
- rugged ABS plastic housing, with soft keypad
- multi-function display with clear reading, mm/inch switchable
- ON/OFF button, coupling state indication, memory function for 2000 groups
- Pre-Set function for upper and lower limit setting
- incl. software for data transmission
- with 2 external probes:
- 1x N05/90° angle probe (\varnothing 10 mm/5 MHz), for steel 1 – 250 mm
- 1x N07 (\varnothing 6 mm/7 MHz), for thin-walled pipes or small radii 0,75 – 50 mm
- operating temperature -10 °C ~ 60 °C, rel. humidity 20 % ~ 90 % RH
- incl. 2x 1.5 V battery (type AA, art.-no.: 90003), couplant, operation manual



Accessories on
page 289

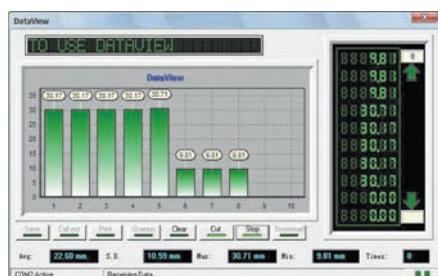

ART NO	mm	mm N05	mm N07	sound velocity m/s	max. mm	mm
480261	0.01	1 – 250	0.75 – 50	1000 – 9999	$\pm 0.5\% + 0.01$ mm	163 x 78 x 33

Ultrasonic Thickness Gauge

- designed to measure the thickness of ferrous (Fe) or non-ferrous materials (NFe)
- dedicated for many materials, such as steel, cast iron, grey cast iron, nodular cast iron, aluminium, copper, bronze, zinc, glass (quarz), ceramics, composites, epoxies, homogenously plastics and other ultrasonic wave well conductive materials
- rugged handheld measurement device, for quick and flexible wall thickness measurements
- suitable for most metallic and non-metallic ultrasonic wave can go through, application areas are e.g. surface technology, automotive industry, storage tank, pressure boiler, shipbuilding, chemical- and petrol plants, power stations, aluminium industry, machine engineering, bridge construction, etc.
- for wall thickness checking of pressure tanks, vessels, oil tanks, chemical instruments and many others
- operates in any position: horizontal, vertical or upside down

- robust housing made of polyamide, with soft keypad
- 4-digit LCD display, with backlight, digit height 9 mm
- with integrated test block for fast calibration
- autom. calibration function, reading in mm/inch
- On/Off key and autom. power off function, with „low-battery“ indicator
- selectable sound velocity 1000 – 9999 m/s
- internal data memory for 40 measurements
- incl. exchangeable 5 MHz transducer, \varnothing 10 mm, for standard purposes
- operation temperature 0 °C ~ +40 °C, humidity 20 % – 90 % RH
- incl. 2x battery 1.5 V (type AA, art.-no.: 90003), with operation manual, wrist strap and couplant



Accessories on
page 289




ART NO	mm	mm / inch	max.	mm
480120	0.01	0.7 – 300.00 / 0.36 – 11.80	$0.5\% + 0.1$	124 x 67 x 30

Ultrasonic Thickness Gauges

Ultrasonic Thickness Gauge with Echo-Echo System (A+B-Scan)


- top class device, with USB data output, with A- + B-Scan-Mode
- suitable for measuring material thickness, also through coated surfaces
- location-independent material measurement with simple operation
- dedicated for ferrous (Fe) and non-ferrous materials (NFe)
- large TFT color display (320 x 240 mm), with clear reading
- multilingual menu navigation, data transfer by USB output to PC in any windows system
- 2 – 9 average measurements, operates in any position: horizontal, vertical or upside down
- Min/Max limit setting, with alarm function, low battery indicator
- automatic probe recognition and automatic zero calibration
- integrated test plate for fast calibration
- automatic measurement and manual-measurement selectable
- automatically locates the detection point
- measurement screen is automatic frozen, which makes it easy to analyze the data for the user
- with our optional available probes our device is dedicated for materials e.g. such as: steel, cast iron, grey cast iron, nodular cast iron, aluminium, copper, brass, zinc, glass (quartz), composites, ceramic, epoxies, PVC, homogenously plastics and other ultrasonic wave well conductive materials

- rugged housing, with soft key pad
- TFT color display, with multi-function indicator, clear reading
- integrated steel test plate for fast calibration
- autom. calibration function, values in mm/inch
- On/Off key, autom. power off, with „low-battery“ indicator
- selectable sound velocity range 1.000 m/s – 9.999 m/s
- with data memory 100 measurement in 100 different files
- incl. exchangeable 5 MHz probe, ø 13,2 mm, < 60 °C, for standard purpose
- operation temperature -20 °C ~ +50 °C, rel. humidity 20 – 90 %RH
- incl. 2x 1,5 V battery (type AA, art.-no.: 90003),
- with couplant, workshop calibration certificate and operation manual



incl. probe 5 MHz,
with dual element,
art.-no.: 480330

Accessories
on page 289




ART NO	mm	mm / inch	sound velocity m/s	max.	mm	CC
480130	T-E 0.65 ~ 400.0 E-E: 3 ~ 25	0.01 / 0.001	1000 ~ 9999	±0.4 mm up to < 9.99 mm ±0.1 % + 0.04 mm up to 10 – 99.9 mm ±0.3 % up to > 100 mm	133 x 75 x 29	inclusive
480131	T-E 20 ~ 590	0.01 / 0.001	1000 ~ 9999	±0.1 % + 0.04 mm up to 10 – 99.9 mm ±0.3 % up to > 100 mm	133 x 75 x 29	inclusive
480132	T-E 1.50 ~ 20 E-E: 0.20 ~ 10	0.001 / 0.0001	1000 ~ 9999	±0.4 mm up to < 9.99 mm ±0.1 % + 0.04 mm up to 10 – 99.9 mm	133 x 75 x 29	inclusive

Our new slogan: Measuring Solutions

- ✓ more appropriate
- ✓ more meaningful
- ✓ more contemporary

This stands for the further development of the brand Vogel Germany to even more customer-oriented solutions in the measurement technology, development of the range, consulting, training, etc.

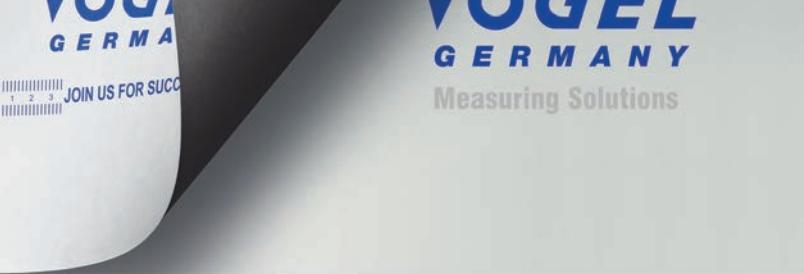

Accessories for Coating Gauges and Thickness Gauges

Accessories for Universal Coating Thickness Gauges

ART NO	suitable for model	application	article description	— μm
480310	all models	for calibration purpose	calibration foil set Fe + Ne	—
480315	480227	magnetic induction	probe F1 (Fe)	0 – 1250
480316		eddy current method	probe N1 (Ne)	0 – 1250
480322	480237	combined Fe + FNe	combined probe F (Fe) + N (NFe)	0 – 3500 0 – 3000
480323		magnetic induction	probe F10 (Fe)	0 – 10000



ART NO 480315



ART NO 480316



ART NO 480322



ART NO 480323

Accessories for Ultrasonic Thickness Gauges

ART NO	suitable for model	application	article description	— mm
480280	all models	for coupling	couplant, 60 ml	—
480288			couplant, 100 ml	—
480275	480120	for standard purposes	probe, ø10 mm 5 MHz	1.0 – 250
480274		for thin pipes	probe, ø7 mm 5 MHz	0.8 – 30
480277		for extrem high temperatures	probe, ø12 mm 5 MHz	3.0 – 100
480278		for cast iron	probe, ø12 mm 2.5 MHz	3.0 – 250
480330	480130	for standard purposes and for Echo-Echo up to ø 25 x 3 mm	probe ø 13.2 mm 5 MHz (< 60 °C)	T-E: 1.44-00 E-E: 3-25
480331	480101 and 480130	for thin pipes up to ø 25 x 1.2 mm	probe ø 11 mm 5 MHz (60 °C)	0.8 – 300
480332		for extrem high temperatures up to ø 25 x 2 mm	probe ø 15 mm 5 MHz, up to 350°C	2 – 200
480333		for thin pipes up to ø 15 x 1.2 mm	probe ø 9 mm 7.5 MHz (60 °C)	0.65 – 50
480334		for extrem thin pipes up to ø 15 x 1 mm	probe ø 6 mm 10 MHz (60 °C)	0.65 – 20
480335		for pipes up to ø 40 x 3 mm	probe ø 17 mm 2 MHz (60 °C)	2 – 400
480336	480130	for fiberglass and composites	probe ø 26 mm 1 MHz (60 °C)	3.0 – 200
480337	480131	for fiberglass and composites	probe ø 28 mm 1 MHz (60 °C)	20 – 590
480338	480132	for thin, curved surfaces	probe ø 7.5 mm 5 MHz (60 °C)	E-E: 0.200-10 T-E 1.500-20
480341	480261	for standard purpose	probe ø 10 mm 5 MHz (60 °C)	1 – 250
480342		for thin, curved surfaces	probe ø 6 mm 7 MHz (60 °C)	0.75 – 50
480343		for cast iron and rough surfaces	probe ø 22 mm 2 MHz (60 °C)	2.5 – 350
480344		for extrem high temperatures	probe ø 14 mm 5 MHz, until 500 °C	2 – 100
489871	all models	6-step test block 1 / 3 / 5 / 10 / 15 / 20 mm		1 – 20
489872		4-step test block 1.5 / 4 / 10 / 18 mm		1 – 10



ART NO 480280



ART NO 480288



ART NO 480330



ART NO 480331



ART NO 480332



ART NO 480333



ART NO 480334



ART NO 480335



ART NO 480336



ART NO 480337



ART NO 480338



ART NO 480342



ART NO 480343



ART NO 480344



ART NO 489871



If precision
is most important

Our Universal Square is one of
more than 4,500 quality products.



VOGEL
GERMANY
Measuring Solutions

Electr. Digital Vibration Meter

- with integrated or with external probe, incl. workshop test certificate
- compact analyser for predictive maintenance of production machinery and for a quick checking of unbalance, misalignment, bearings and gears etc.

- rugged, polyamid plastic housing, with keypad
- large LCD display with clear reading, with backlight
- On-switch, automatic power-Off after approx. 1 min., with battery indicator
- low frequency mode "Lo-RMS" to test low vibrations
- high frequency mode "Hi-AVE" to test avarage acceleration
- displacement peak to peak mode "Hi-Peak"
- large frequency range: 10 Hz up to 1 kHz (Lo), 1 kHz up to 15 kHz (Hi)
- incl. 2 exchangeable probe tips, for different measuring functions:
— short probe tip for standard vibration measurements
— long, small probe tip for vibration measurements on small or narrow objects, etc.
— without probe tip for vibration measurements on smooth object surfaces, etc.
- operation temperature 0 °C ~ +40 °C, humidity 30 – 90 %RH
incl. 1x 9 V battery (type 6LR61, art.-no.: 90006), with operation manual

art.-no. 480600

- LCD display with digit height 18 mm
- accuracy ±5 % of display value (±2 digits)
- with integrated accelerometer and with hand strap

art.-no. 480605

- two-row LCD display, for velocity and temperature, digit height 15 mm/10 mm
- accuracy ±5 % of display value (±2 digits)
- with external accelerometer and adapter cable
- HOLD function for holding the determined measured value
- with magnet
- with temperature measurement (C°/F°) within range -10 °C ~ +80 °C, accuracy ±2 °C



ART NO	velocity Lo-RMS	velocity Hi-AVE	displacement, peak to peak Hi-PEAK	mm
480600	0.1 – 199.9 mm/s	0.1 – 199.9 m/s ²	0.001 – 1.999 mm	185 x 68 x 30
480605	0.1 – 199.9 mm/s	0.1 – 199.9 m/s ²	0.001 – 1.999 mm	135 x 75 x 38

Tachometers


Electr. Digital Hand Tachometer

- with LCD display for optical or mechanical speed detection

- measurement accuracy is $\pm 0.02\%$ from the end value ± 1 digit
- 5 digit LCD display, sturdy ABS plastic housing
- direct and non-contact recording of rotation
- automatic Off-function, after 30 sec.
- automatic Min/Max/Average memory-function, recall by memory button
- mode function for different measurement units
- power supply via 2x 1.5 V battery (type AA, art.-no.: 90003), or rechargeable batteries (optional)
- extensive accessories is included: Hand Tachometer, 10 reflective tags, adaptor for direct measuring 1:1, rubber tip, track wheel 0.1 m and 6 "
- incl. 2x 1.5 V battery (type AA, art.-no.: 90003)
- operation manual and test certificate

Option

- art.-no. 270160-8 set of reflective tags (10 pcs.)



ART NO	1 / min.	measuring distance max. mm	storage temperature °C	operation temperature °C	CC
270160	1 – 99999	600 (optically)	-20° ~ +70°	0° ~ +50°	on request


Electr. Digital Hand Tachometer

- especially for maintenance and service tasks for lifts
- special set for lift and wire/cable measurement
- with LCD display for optical or mechanical speed detection

- measurement accuracy is $\pm 0.02\%$ from the end value ± 1 digit
- 5 digit LCD display, sturdy ABS plastic housing
- direct and non-contact recording of rotation
- automatic Off-function, after 30 sec.
- automatic Min/Max/Average memory-function, recall by memory button
- mode function for different measurement units
- extensive accessories is included: Hand Tachometer, 10 reflective tags, adaptor for direct measuring 1:1, rubber tip, track wheel 0.1 m and 6 ", adapter for lift-, textile yarn- and wire measuring
- incl. 2x 1.5 V battery (type AA, art.-no.: 90003), with operation manual

Option

- art.-no. 270160-8 set of reflective tags (10 pcs.)



ART NO	1 / min.	measuring distance max. mm	storage temperature °C	operation temperature °C	CC
270161	1 – 99999	600 (optically)	-20° ~ +70°	0° ~ +50°	on request

Accessories for Tachometers and Stroboscope

Accessories for Electr. Digital Hand Tachometers



ART No 270160-1



ART No 270160-2



ART No 270160-3



ART No 270160-4



ART No 270160-5



ART No 270160-6



ART No 270160-7



ART No 270160-8



ART No 90003

In each set contain:

set content	270160-1	270160-2	270160-3	270160-4	270160-5	0.1 m 270160-6	6" 270160-7	270160-8	90003	open carrying case
270160	—	✓	✓	✓	✓	✓	✓	✓	✓	✓
270161	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

ART No

product description

ART No

product description

270160-1

adapter

270160-5

drive tip

270160-2

extension shaft

270160-6

measuring wheel 0.1 m

270160-3

change attachment

270160-7

measuring wheel 6"

270160-4

drive cone

270160-8

set of reflective tags, 10 pcs.

Electr. Digital-Stroboscope • IP65 NEW

- water-, coolant proof and shock resistant hand-held device
- e.g. for use in the automotive industry and mechanical engineering
- for error analysis of high-speed industrial plants
- for optical representation of the revolutions
- in a rugged aluminium-/ABS-plastic-housing
- with modern LED technology, precise working electronic
- with auto-synchronization frequency laser function
- for non-contact measurement
- large LCD display, multiple lines, coloured lighting
- light intensity 6.500 Lux @ 300 mm, light colour approx. 6.500 K
- no wear of the high-power LEDs
- Accuracy: flash frequency (internal) and frequency measurement (external)
- resolution ± 0.1 (30 ... 999.9 FPM) ± 1 (1.000 ... 999.999 FPM)
- operation temperature 0 °C ~ 45 °C
- incl. 3x 1.5 V battery (type AA, art.-no.: 90003)
- in sturdy carrying case, with operation manual




Stroboscope on:
rotations visible



Stroboscope off:
rotations not visible



LED front



ART No

610102



FPM



max.

flash colour



1 mW



191 x 82 x 60



inclusive

Force Gauges, Dial Tension Gauges and Scales


Electr. Digital Force Gauges

- robust push/pull force gauge, for simple measurements

- measurement accuracy is from max. 0.5 % of capacity, data sampling rate 1000 Hz
- large LCD display with backlight
- overload protection 2 % of full scale
- reversible display with automatic direction detection
- with peak hold function, real time or peak hold mode to observe
- automatic power-Off
- incl. standard attachments and extension rod (90 mm long)
- incl. 1x 1.5 V battery (type AAA, art.-no.: 90002), charger and operation manual



standard attachments and extension rod 90 mm



ART NO	N max.	N	measuring units	→ [mm] ←	CC
270353	100	0.050	N / kgf / lbf / oz	195 x 84 x 35	on request
270354	250	0.100	N / kgf / lbf / oz	195 x 84 x 35	on request
270355	500	0.200	N / kgf / lbf / oz	195 x 84 x 35	on request
270356	1000	0.500	N / kgf / lbf / oz	195 x 84 x 35	on request

Kern • Electr. Digital Compact Scales

- entry-level model in the low cost range, with weigh-in function

- rugged plastic housing, with large LCD unit, digit height 15 mm
- easy operation by two buttons
- connector for charger
- weigh-in function, by pressing the TARE-button switches over to "0", simplifies mixing
- automatic auto-off after 3 min. without change of load to preserve the battery
- incl. 2x 1.5 V battery (type AA, art.-no.: 90003), with operation manual

Option

- charger 230 V/AC (art.-no.: 273998)



ART NO	max. kg	g	weighing plate-Ø mm	→ [mm] ←
273003	0.5	0.1	150	170 x 240 x 39
273004	0.2	0.01	105	170 x 240 x 39
273006	2.2	1	150	170 x 240 x 39
273008	6	0.1	150	170 x 240 x 39

Kern • Electr. Digital Precision Scales • IP65 / IP67

- IP65: Dust and jet water proof acc. to DIN 40050 / IEC 60529
- IP67: Water and oil tight (at times) acc. to DIN 40050 / IEC 60529

- rugged metal housing, weighing plate made from stainless steel
- large LCD display, digit height 20 mm
- easy 3-/4-button operation, self-explaining
- operation by battery or main supply, switchable
- automatic power-Off after 3 min. without change of load to preserve the battery
- freely programmable weighing units
- adjusting program (CAL)
- incl. charger 230 V/AC and dust cover
- incl. operation manual

ART NO 273322 - 273324



IP67

ART NO 273320 + 273321



IP65



CE

ART NO	max. kg	g	reproducibility g	linearity ± g	weighing plate mm	mm	CC
273320	0.5	0.1	0.1	0.2	120 x 150	170 x 150 x 40	on request
273321	5	1	1	2	120 x 150	170 x 150 x 40	on request
273322	5 7.5	0.5 1	0.5 1	1.5 3	252 x 200	285 x 255 x 90	on request
273323	8 15	1 2	1 2	3 6	252 x 200	285 x 255 x 90	on request
273324	16 30	2 5	2 5	6 15	252 x 200	285 x 255 x 90	on request

Kern • Electr. Digital Compact Scales NEW

- industry quality design, with robust tuning fork weighing system
- with data output RS 232

- rugged metal housing, weighing plate made from stainless steel
- large LCD display, digit height 16,5 mm
- automatic power-Off after 3 min., without change of load to preserve the battery
- PRE-TARE button for manual subtraction of a known container weight
- power supply with 9 V block battery (not included)
- with animal weighing program, strong vibrations are filtered out
- incl. dust cover and operation manual
- Internal automatic adjustment, Automatic adjustment CAL for setting the accuracy using a test weight
- Autom. reference optimization
- Capacity display

Options

- RS-232 / Bluetooth® adapter for connecting Bluetooth® capable devices, art.-no.: 273063-1
- RS-232 / WLAN adapter for wireless connection to network and WLAN-compatible devices, art.-no.: 273063-2



CE

ART NO	max. kg	g	verification value [e] g	minimum weight [min] g	linearity ± g	weighing plate mm	mm	CC
273063	0.62	0.001	—	—	0.004	Ø 140	202 x 293 x 266	on request
273064	3.2	0.01	—	—	0.02	190 x 190	195 x 290 x 90	on request
273065	12	0.1	—	—	0.2	190 x 190	195 x 290 x 90	on request
273067	0.62	0.001	0.01	0.02	0.004	Ø 140	202 x 293 x 266	on request
273068	3.2	0.01	0.1	0.5	0.02	190 x 190	195 x 290 x 90	on request
273069	12	0.1	1	5	0.2	190 x 190	195 x 290 x 90	on request

Scales

Kern • Electr. Digital Compact Scales

- industry quality design, with two LCD-displays
- with data output RS 232 C

- industry scale with rugged metal housing, stainless steel weighing plate
- with large LCD display, with backlight, digit height 25 mm
- automatic power-Off after 3 min., without change of load to preserve the battery
- PRE-TARE button for manual subtraction of a known container weight
- power supply with 9 V block battery (not included)
- with animal weighing program, strong vibrations are filtered out
- incl. dust cover and operation manual



ART NO	max. kg	g	reproducibility g	linearity ± g	weighing plate mm	mm	CC
273076	12	1	1	3	252 x 228	270 x 345 x 106	on request
273078	24	2	2	6	252 x 228	270 x 345 x 106	on request

Kern • Electr. Digital Parcel Platform Scale

- cheap parcel and allround scales, for despatch weighing

- rugged metal housing, weighing plate made from stainless steel
- with wall mounting for electr. unit
- large LCD display, digit height 25 mm
- weighing units in kg or lb
- display unit placed anywhere by flexible spiral cable (approx. 2 m)
- easy 4-button operation, self-explaining
- automatic power-Off after 3 min., without change of load to preserve the battery, permissible temperature +10 °C ~ +35 °C
- with animal weighing program
- weigh-in function, by pressing TARE-button switches over to "0"
- adjusting programme (CAL) means for adjusting the precision test weights, (is not included)
- mains or battery operation possible
(6x 1.5 V battery, type AA, art.-no.: 90003, batteries are not included)
- incl. charger 230 V/AC, with operation manual

Option

- stand, art.-no.: 273558
(stand only)



ART NO	max. kg	g	reproducibility g	linearity ± g	weighing plate mm	mm	LCD unit	CC
273302	35	10	10	20	310 x 305 x 55	210 x 110 x 45	on request	
273303	60	20	20	40	310 x 305 x 55	210 x 110 x 45	on request	
273305	150	50	50	100	310 x 305 x 55	210 x 110 x 45	on request	
273308	300	100	100	200	310 x 305 x 55	210 x 110 x 45	on request	

Kern • Electr. Digital Parcel Platform Scale • IP65


- multimodel platform scale
- for industrial purpose, with piece-counting, reference quantities selectable
- dual range scale, automatically switches to the next higher weighing range
- dust- and splash water proof acc. to DIN 40050 / IEC 60529
- industry scale with rugged plastic housing, stainless steel weighing plate
- with large LCD display, with backlight, digit height 25 mm
- freely programmable weighing units, e.g. in yarn length g/m, in paper weight g/m², etc.
- display unit (IP 65) placed anywhere by flexible spiral cable (approx. 1.4 m)
- easy 5-button operation, self-explaining, with animal weighing program
- with data output RS 232 C, for data-printer or computer connection
- mains or battery operation possible
(1x 9 V battery, type 6LR61, art.-no.: 90006, batteries are not included)
- adjusting program (CAL), piece-counting (PCS), net-total weighing (REZ)
- automatic power-Off after 3 min., permissible temperature +5 °C ~ +35 °C
- incl. charger 230 V/AC, dust cover, with operation manual

Option

- stand, art.-no.: 273550
(stand only)



art.-no.: 273550, stand only



ART NO	max. kg	g	reproducibility g	linearity ± g	weighing plate mm	mm	LCD unit	CC
273054	15 / 35	5 / 10	5 / 10	15 / 30	318 x 308 x 75	225 x 110 x 45	on request	
273057	30 / 60	10 / 20	10 / 20	30 / 60	318 x 308 x 75	225 x 110 x 45	on request	
273059	60 / 150	20 / 50	20 / 50	60 / 150	318 x 308 x 75	225 x 110 x 45	on request	
273061	150 / 300	50 / 100	50 / 100	150 / 300	522 x 403 x 90	225 x 110 x 45	on request	


Kern • Electr. Digital Industrial Counting Scales

- verifiable
- entry level model into the professional-counting


- industry scale with rugged metal housing, stainless steel weighing plate
- with 3 large LCD displays, with backlight, digit height 18 mm
- verifiable weight display, reference weight, total number of pieces
- programmable via keypad: known reference weight / reference quantity
- accurate counting: the autom. reference optimization gradually improves the average value of the piece weighing
- cumulative counter memory: summing up of the same counting parts and total pieces and total weight, counting resolution: 30000 points
- acoustic beep „Fill-to-target“: target quantity and target weight programmable
- weigh-in function, by pressing the TARE-button switches over to "0", simplifies mixing
- permissible temperature -10 °C ~ +40 °C
- standard with charger, internal (please mention the country location of use) and operation manual

Option

- verification or DAkkS calibration certificate by extra charge
(with verification: location of use with post code required - subsequently not possible)



- high mobility, thanks to battery operation
- with recessed grips



ART NO	max. kg	g	verification value [e] g	minimum weight [min] g	minimum weight g/p.c.	weighing plate mm	mm	CC
273022	3	1	1	20	0.1	300 x 225	300 x 330 x 110	on request
273024	15	5	5	100	0.5	300 x 225	300 x 330 x 110	on request
273025	30	10	10	200	1	300 x 225	300 x 330 x 110	on request

Scales

Electr. Digital Hanging Scale

- for mobile use
- for weighing by hand or for hanging up on an angle bracket

- sturdy ABS-plastic housing with a stainless steel hook
- large LCD display with digit height:
art.-no. 273087 about 13 mm / art.-no. 273080 – 273082 about 11 mm
- with data hold button, display can be "frozen" for approx. 5 sec., makes reading easier
- On/Off-button, TARE-button: attach an empty vessel/container and place the display to zero
- weighing units: kg, lb and N (Newton)
- automatic power-Off
- permissible temperature +5 °C ~ +35 °C
- art.-no. 273087 only suitable as luggage scale, **not calibratable**
- art.-no. 273080 – 273082 with built-in measuring tape (100 cm)
- art.-no. 273087 incl. 2x 1.5 V battery (type AAA, art.-no.: 90002)
- art.-no. 273080 – 273082 incl. 1x 9 V battery (type 6LR61, art.-no.: 90006)
- art.-no. 273087 not calibratable (simple household scale)
- incl. operation manual

Option

- DAkkS calibration certificate for art.-no. 273080 – 273082 by extra charge (afterwards not possible)



ART NO 273080 – 273082 **ART NO** 273087



ART NO	max. kg	g	mm	CC
273080 (Kern)	15	20	90 x 30 x 175	on request
273081 (Kern)	50	50	90 x 30 x 175	on request
273082 (Kern)	50	100	90 x 30 x 175	on request
273087 (Vogel Germany)	30	10	95 x 23 x 195	—

Kern • Electr. Digital Crane Scale



ART NO 273110 – 273111

ART NO 273100 – 273103



Option

- DAkkS calibration certificate by extra charge (afterwards not possible)

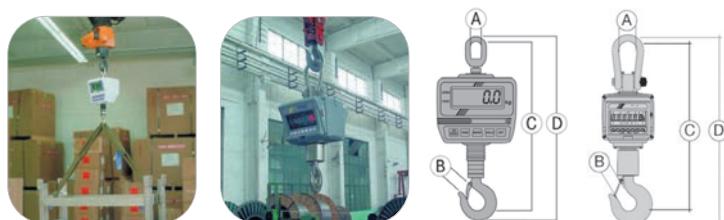

ART NO	max. kg	g	A	B	C	D	mm	CC
273100	1000	100	80	40	540	610	270 x 175 x 200	on request
273101	3000	500	75	50	540	610	270 x 175 x 200	on request
273102	5000	500	75	50	650	730	300 x 190 x 230	on request
273103	10000	1000	100	60	750	840	300 x 190 x 230	on request
273110	300	100	26	25	358	390	163 x 120 x 159	on request
273111	600	200	26	25	358	390	163 x 120 x 159	on request

Kern • Electr. Digital Hanging Scale • also with IP65

- with stainless steel snap link and S-hook made from stainless steel
- art.-no. 273083 – 273086 with sturdy ABS plastic housing
art.-no. 273094 – 273097 with sturdy stainless steel housing, in IP65 design
- art.-no. 273083 – 273086 large LCD display, digit height 12 mm
art.-no. 273094 – 273097 large LCD display, at front and rear side, digit height 12 mm
- with data hold button, display can be "frozen" for some seconds, adjusting programme (CAL)
- TARE-button: attach an empty vessel/container and place the display to zero
- automatic power-Off after 3 min., without change of load to preserve the battery
- art.-no. 273083 – 273086 incl. 3x 1.5 V battery (type AA, art.-no.: 90003)
art.-no. 273094 – 273097 incl. 2x 1.5 V battery (type AA, art.-no.: 90003),
incl. operation manual



ART N° 273094 – 273097



ART N° 273083 – 273086



ART N°	IP65 water- and coolant proof	max. kg	g	mm	total height incl. hooks mm	CC
273083	X	20	10	80 x 45 x 150	290	on request
273084	X	50	100	80 x 45 x 150	290	on request
273085	X	100	200	80 x 45 x 150	290	on request
273086	X	200	500	80 x 45 x 150	290	on request
273095	✓	50	100	95 x 55 x 175	315	on request
273096	✓	100	200	95 x 55 x 175	315	on request
273097	✓	200	500	95 x 55 x 175	315	on request

Test Weights

- for checking of measurements and scales
- available as single weights or in sets

- M1-Quality Class, brass made (stainless steel on request), finely turned
- DAkkS calibration certificate (with extra charge)
- in a plastic case with soft insert (wooden case on request)

Other weights or set-components are available on request!



ART N°	kg	max.	± mg	CC
Quality Class M1				
273266	0.100	5	on request	
273268	0.500	25	on request	
273269	1.000	50	on request	
273270	2.000	100	on request	
273271	5.000	250	on request	

ART N°	kg	CC
Set-Components Quality Class M1		
273282	0.001 – 0.500	on request
273283	0.001 – 1.000	on request
273285	0.001 – 5.000	on request
—	—	—
—	—	—

Voltage Testers and Miniature Current Clamp

Testboy • Voltage Detector • IP44

- non-contact type, rapid detection of live conductors to e.g. cable connections, cable reels, sockets, electrical outlets, switches, etc.
- particularly well-suited for professional use and as well for hobby
- sturdy ABS-plastic housing, with clip, dustproof and spray water resistant
- contactless and safe testing, works at a distance of 4 mm
- with acoustical signal and built-in LED lamp on top, measuring range 12 V – 1000 V
- overload category CAT III 1000 V
- capacitive process
- incl. 2x 1.5 V battery (type AAA, art.-no.: 90002), with operation manual



ART No 640357	→ ← V AC 12 – 1000	→ mm ← L x Ø 160 x 25
------------------	----------------------------	-----------------------------

Testboy • Electr. Digital Miniature Current Clamp • IP44


- the manual/automatic test range selector enables versatile and reliable testing use in the service sector, in industry or in the installation whether you want to measure a direct current as shown in the picture to check that a battery's load current will be sufficient, or the load is pulling too much and causing leakage
- the included readiness-bag keeps the device and its attachments safe, even in harsh areas or on the road
- protected housing made of sturdy ABS-plastic, dustproof and spray water resistant
- LCD display with clear reading
- voltage up to 600 V, current AC/DC up to 600 A
- overload category CAT III, 600 V, conductivity with acoustical signal, resistance 0 – 60 Ω
- with diode test, with testing lead set
- incl. 3x 1.5 V battery (type AAA, art.-no.: 90002)
- incl. operation manual



ART No 640364	→ ← -600 V AC/DC	→ mm ← -600 A AC/DC	208 x 75 x 35
------------------	-----------------------	------------------------	---------------

Testboy • Two Pole Voltage Tester • IP65

- the professional appearance is underlined by the mix of materials used in the plastic housing and the rubber handle
- display window made of break proof plastic, scratch resistant
- sturdy ABS-plastic housing, water- and coolant proof acc. to DIN 40050 / IEC 60529
- single pole phase testing, two pole phase sequence testing, autom. load for FI/RCD test
- autom. measurement range, autom. resistance: Is ~ 30 mA ED(DT) = 30 sec.
- operation panel: finger tip contact, continuity test 0 – 500 kOhm, with acoustical signal
- incl. 2x 1.5 V battery (type AAA, art.-no.: 90002), with operation manual

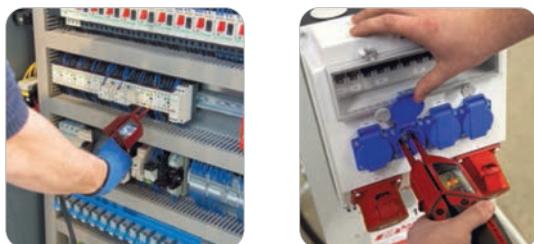

ART NO	V AC / DC	phase indicating	overload category	mm
640332	6 – 1000 AC / DC	> 100 V AC	CAT IV 1000 V	238 x 70 x 30

Testboy • Two Pole Voltage Tester • IP44

- with 8 LED's, user-friendly design
- for measuring AC / DC,
- two practical functions in a single device
- the instrument has met with the approval for many customers working in the electrical- and tools branch

- sturdy ABS-plastic housing with rubber handle, dustproof and spray water resistant
- protected against voltage loads from 6 up to 400 V AC / DC
- DC and AC voltage tests with polarity indication can be performed safely
- power supply by test object
- overload category CAT III 1000 V
- with operation manual



ART NO	V AC / DC	display	mm
640356	6 – 400	8 LED's	120 x 60 x 30

Multimeters

Testboy • Electr. Digital Multimeter • IP44

- with LED lamp and with non-contact voltage tester
very useful instrument, especially in the field of electrical engineering
- housing is made of tough, damage-resistant ABS-plastic, dustproof and spray water resistant
- large LCD display for clear reading
- current DC and AC up to 4 A
- diode test, transistor test function, conductivity test, with acoustical signal
- incl. 1x measuring lines
- incl. 2x 1.5 V battery (typ AAA, art.-no.: 90002), with operation manual



ART NO	AC/DC	overload protection	resistance	→ mm ←
640382	0 – 400 V	CAT III / 300 V	2 MΩ	140 x 70 x 35

Electr. Digital Multimeter • IP44

- with solar charger on top of instrument
very useful instrument, especially in the field of electrical engineering
- housing is made of tough, damage-resistant ABS-plastic, dustproof and spray water resistant
- large LCD display clear reading, digit height 19 mm
- current DC and AC up to 20 A
- incl. thermo probe for temperature measurements
- diode test, transistor test function, conductivity test, with acoustical signal
- with battery test function
- with frequency function
- with decimal digits change
- incl. 2x measuring lines
- incl. rechargeable accu and charger cable, with operation manual



ART NO	AC	DC	overload category	resistance	→ mm ←
640384	0 – 750 V	0 – 1000 V	CAT III / 600 V CAT IV / 1000 V	60 MΩ	167 x 90 x 50

Information Overview / Tolerance Limits

IP-Protection types overview acc. to EN 60529 (IP • International Protection)

1. Index

Degree of protection against foreign objects/particles and dust

- IP 4.. Protection against penetration of solid foreign objects von ≥ 1 mm.
- IP 5.. Protection against harmful dust deposits (dust protected).
- IP 6.. Protection against penetration of dust (dust-proof).

2. Index

Degree of protection against water

- IP ..0 no protection
- IP ..2 Protection against dripping water up to 15° tilt housing.
- IP ..4 Protection against water spray from any direction.
- IP ..5 Protection against water jets from any direction.
- IP ..6 Protection against powerful water jets from any direction.
- IP ..7 Protection against temporary immersion in water.
- IP ..8 Protected from ingress of water during immersion for indefinite period.

Tolerance limits acc. to EC-Measuring Directive 2004/22

Pocket Tapes / Steel Rules

Length	m	1	2	3	4	5	8	10
Tolerance class I	mm	± 0.3	± 0.4	± 0.5	± 0.6	± 0.7	± 1.0	± 1.2
Tolerance class II	mm	± 0.7	± 0.9	± 1.1	± 1.3	± 1.5	± 2.1	± 2.5

Folding Rules

Length	m	1	2	3
Tolerance class II	mm	± 1.0	± 1.2	± 1.4
Tolerance class III	mm	± 1.8	± 2.2	± 2.6


Thickness tolerances for feeler gauges and feeler gauge rolls

nominal thickness mm	0.000 – 0.024	0.025 – 0.039	0.040 – 0.062	0.063 – 0.124	0.125 – 0.159	0.160 – 0.199	0.200 – 0.249	0.250 – 0.314	0.315 – 0.389	0.400 – 0.499	0.500 – 0.629	0.630 – 0.799	0.800 – 0.999	1.000 – 1.249
Tolerance T2 μm	± 2	± 3	± 4	± 5	± 6	± 7	± 8	± 9	± 11	± 12	± 14	± 17	± 19	± 24
Tolerance T3 μm	± 1.5	± 2	± 3	± 4	± 5	± 5	± 6	± 7	± 8	± 9	± 10	± 12	± 13	± 17

Measuring categories CAT I up to CAT IV

- CAT I: approved for measurements on circuits that are not directly connected to the power grid. (e.g. specially protected devices)
- CAT II: approved for measurements on circuits which are electrically connected directly to the low voltage grid.
(e.g. household appliances)
- CAT III: approved for measurements in building installation
(e.g. as distribution, wiring, sockets, switches)
- CAT IV: approved for measurements at the source of low-voltage installations (e.g. as meters, mains terminals, primary overcurrent protection devices)


Any questions?
We are pleased to advise!

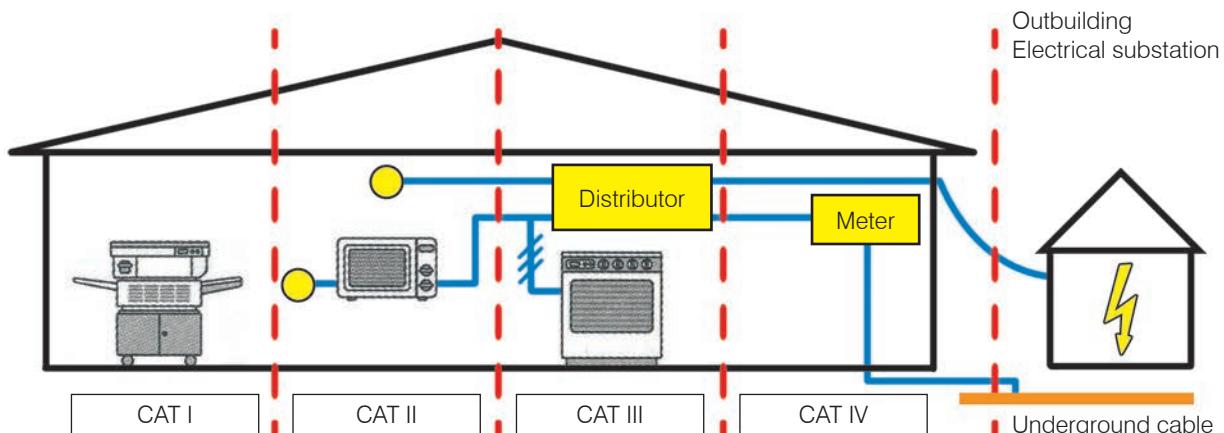

Magnet and Brake Fluid Tester, Car Tester

Testboy • Magnet Field Detector, non contact

- with LED lamp, non contact
- easy and quick contact-free detection of magnetic-fields
- all permanent and synthetic magnetic fields are indicated by the tip lighting up
- the built-in magnet-field sensor allows a reliable check proper function of hydraulic and pneumatic valves, relays and contactors
- rugged ABS-plastic housing, with clip
- safe and contactless testing, works at a distance of 4 mm
- optical red LED display, with built-in permanent magnet for a quick self test
- incl. 2x 1.5 V battery (type AAA, art.-no.: 90002), with operation manual



ART No

640376

—|————|—

all magnetic fields

→ [mm] ←

length x ø

160 x 25

Testboy • Brake Fluid Tester, DOT 3, DOT 4, DOT 5.1 • IP44

- fast and accurate check on the water content in the brake fluid
- thanks to various measuring ranges, user-friendly operation and compact design, the device is ideal for use in garages and motorcycle workshops
- check brake fluids DOT 3, DOT 4, DOT 5.1
- acid- and alkaline housing, with clip
- visual indicating via 3 LED's
- measuring point illumination
- incl. 2x 1.5 V battery (type AAA, art.-no. 90002), with operation manual



ART No

640372

—|————|—

DOT 3 / DOT 4 / DOT 5.1

→ [mm] ←

length x ø

152 x 23.5

Testboy • Car Tester, Voltage Tester for 3 – 48 V • IP40

- with integrated piercing probe perfect instrument for fault diagnostics in cars, trucks, etc.
- rugged ABS plastic housing, dust proof
- LED's with indicating 12 V / 24 V / 48 V
- power supply via test object
- protection class III, IEC/EN 61010-1
- with operation manual



ART No

640366

—|————|—

DC

3 – 48 V

→ [mm] ←

145 x 25 x 16

Electr. Digital Thermometer NEW

- for quick and exact measurement of temperatures
- with external temperature probe, type K

- rugged, ABS-plastic housing, with insulating peel
- large LCD display, 3 ½ -digit, with clear reading, with battery indicator
- On/Off button, data hold button, measuring in °C and °F, max. display 1999
- 1 input for temperature probes type K, for temperature and relative measurements
- response time approx. 2.5 sec
- storage temperature 0 °C ~ +50 °C, rel. humidity < 80 % RH
- incl. 1x 9 V battery (type 6LR61, art.-no.: 90006), with operation manual

Option

- spare part temperature probe art.-no. 649303



with stand



probe



bumper case



ART No	capacity of device °C	at -50 °C ~ 200 °C	max. -50 °C ~ 200 °C / 200 °C ~ 1000 °C / 1000 °C ~ 1300 °C	mm
640303	-50 ~ +1300	1.0	±0.1 % +1 °C / ±0.3 % +2 °C / ±0.5 % +2 °C	147 x 71 x 34

Temperature Probe, Type K



ART No 649300



ART No 649302
surface probe



ART No 649301

immersion probe



ART No 649303



ART No 649304



ART No 649305



ART No 649306

ART No	L mm	ø mm
649300	~ +700 °C	~ 84
649302	~ +400 °C	~ 150

ART No	L mm	ø mm
649301	~ 150	4
649303	~ 950	2
649304	~ 15	14.92
649305	~ 150	3.5
649306	~ 170	5

Infrared Laser Thermometers

Infrared Laser Thermometer

NEW

- suitable for use in industrial companies, car garages, heating, refrigeration and air-conditioning systems or the electric trade
- pistol-size with laser pointer
- for contactless and quick measuring of temperatures
- the devices fulfill the strict requirements of the European and national guidelines
- rugged ABS-plastic housing, resistant to breaking by impact
- large LCD display with clear reading, with backlighting
- temperature in °C / °F, Auto power-off, Data Hold function
- laser protection class II, operation temperature 0 °C ~ 50 °C
- storage temperature -10 °C ~ +50 °C, rel. humidity < 80 % RH
- 640323 emissivity fixed: $\varepsilon = 0.95$
- 640324 emissivity adjustable: $\varepsilon = 0.99 - 0.95 - 0.89 - 0.85 - 0.79 - 0.75$
- incl. 1x 9 V battery (type 6LR61, art.-no.: 90006), with operation manual

ART No 640324



ART No 640323




ART No					measuring optics	
640323	-25 ~ +400 °C	1.0 °C	±1 °C	±1.0 °C	10:1	180 x 100 x 50 mm
640324	-10 ~ +499.5 °C 500 ~ +1.450	0.5 °C 1.0	±1 °C	±1.0 °C	35:1	180 x 100 x 50 mm

Infrared Laser Thermometer

- pistol-sized, with K-type temperature probe and shiftable laser pointer
- for quick measuring of temperatures, by temperature probe or contactless
- the devices fulfill the strict requirements of the european national guidelines

ART No 640317-2

ART No 640314



ART No					measuring optics		ART No spare probe
640314	-30 ~ +550 °C	0.1 °C	±4.0 / ±4 %	±1.0 °C	12:1	170 x 135 x 50 mm	649303
640317-2	-50 ~ +1300 °C	0.1 °C	±2.0 / ±2 %	±1.0 °C	16:1	170 x 135 x 50 mm	—

Electr. Digital Moisture Meters

Electr. Digital Moisture Meter

- for measurements of wood moisture, paper, building materials, etc.
- with 4 contact pins

- rugged, polyamide housing material
- large LCD display with clear reading
- On/Off button, data hold button
- autom. power off, battery indicator
- setting the upper limit of the moisture ratio
- storage temperature -10 °C ~ +60 °C, operation temperature 0 °C ~ +40 °C, rel. humidity < 70 % RH
- incl. 1x 9 V battery (type 6LR61, art.-no.: 90006)
- with operation manual



ART NO	wood		max.	mm
641006	5 % – 40 %	1.0 %	±1.0 % Rh+0.5	129 x 63 x 32

Electr. Digital Moisture Meter **NEW**

- for measurement of building materials, concrete, wood, etc.

- robust, ABS plastic housing
- large LCD display, 3 digits, with clear reading, digit height 15 mm
- On / Off key, data hold function, min / max key, measurement in digits
- depth of penetration about 20 – 40 mm
- low battery indication, backlight switchable
- storage temperature 0 °C ~ 50 °C, rel. Humidity < 80 % RH
- incl. 1x 9 V battery (type 6LR61, art.-no.: 90006), with operation manual



ART NO	capacity device digits	digit	max. digit	mm
641009	0 – 100	1	±1	180 x 45 x 35

Electr. Digital Moisture Meter

- for measurements of wood moisture, paper, carton, building material, grain, etc.
- with insulating peel
- measurement via 2 external contact pins

- rugged, polyamide housing material
- large LCD display with clear reading
- On/Off button, data hold button, button for wood density selection
- button for selection of moisture measurement / temperature measurement (in °C or °F)
- battery indicator, with backlight
- setting the upper limit of moisture ratio, rel. humidity < 70 % RH
- storage temperature -10 °C ~ +60 °C, operation temperature -10 °C ~ +40 °C
- incl. 4x 1.5 V battery (type AA, art.-no.: 90003)
- with operation manual



ART NO	wood		max.	temperature	max. temperature	mm
641008	2 % – 70 %	0.5 %	±1.0 % Rh + 0.5	-10 °C – 60 °C	1 °C / 2 °F	±2 °C / ±4 °F

Sound Level Meter, Lux Meter, Anemometers

Electr. Digital Sound Level Meter

- for sound and noise measurements acc. to the international directives whether in industry, craft, or housekeeping
- useful device for air-conditioning, aviation industry, environmental technology
- with self-calibration
- rugged, polyamide housing material
- On/Off button, data memory for 4700 measurements, slow-/fast-button, clock- and calendar indicator
- with tripod mounting screw on the rear side, autom. power off
- large LCD display, 4-digit, with clear reading, battery indicator
- frequency range 31.5 Hz ~ 8.5 KHz, A/C frequency weighting select switch, AC/DC out put
- bar graph indicator with 50 dB scale, 1 dB step, with pre-select of min/max.-value
- microphone ½ inch, electret condenser-microphone, with detachable foam ball for outside measuring
- storage temperature -20 °C ~ +70 °C, operation temperature 0 °C ~ +45 °C,
- DC 6 V input port, AC analog output port
- incl. 4x 1.5 V battery (type AA, art.-no.: 90003), USB data cable, software, with operation manual



Option

- charging by power supply possible
(only when using rechargeable batteries)



ART No	level range dBA / dBC	dB	max.	linearity range dB	mm	CC
641106	40 – 80 / 50 – 100 / 60 – 110 / 80 – 130	0.1	± 1.5	50	220 x 80 x 35	inclusive

Electr. Digital Luxmeter

- utilising a silicon photo diode with filter behind a large diffusor that is connected to the device by cable ensures that the light intensity can be read in all positions without restriction

- rugged, polyamide housing material
- large LCD display, 3½ digit, with clear reading
- On/Off switch, data hold switch, 3-step measurement setting function
- max. reading value 1999, test rate 0.5 sec., temperature characteristic ±0,1 %/°C
- storage temperature -20 °C ~ +70 °C, operation temperature 0 °C ~ +45 °C
- incl. 1x 9 V battery (type 6LR61, art.-no.: 90006), with operation manual



ART No	LUX	LUX	< 10000 LUX	> 10000 LUX	mm	CC
640342	1 – 100000	1	±4%	±5 % ± 10 Digits	±2 %	130 x 72 x 30

Electr. Digital Anemometer

- for many outdoor applications and for several industry purposes
- for to measure the wind speed in different units
- ideal device for heating- and ventilation technician, shipping industry, etc.
- with Beaufort scale display

- rugged, polyamide housing material
- with tripod mounting screw on the rear side
- large LCD display with clear reading and backlight
- wind speed unit selection: m/s; Ft/min; Knots; Km/h; Mph
- with max.-value and data hold button, average and current speed measuring, temperature reading in °C and °F, switchable
- storage temperature -20 °C ~ +70 °C, operation temperature -10 °C ~ +45 °C
- incl. 1x 9 V battery (type 6LR61, art.-no.: 90006), with operation manual
- art.-no. 641205: without data output
- art.-no. 641204: without data output, with external impeller




ART No	wind speed m/s	wing volume m³/min.	speed m/s	temperature °C	max.	temperature °C	mm
641204	0.3 ~ 45	—	0.1	0.2	±0.1 Digit	± 2	160 x 62 x 35
641205	0.3 ~ 30	—	0.1	0.2	±0.1 Digit	± 2	165 x 85 x 38

Surface Roughness Testers

Electr. Digital Surface Roughness Tester

- portable roughness measuring device for the measurement of Rz, Ra, Rq, Rt

- robust aluminium housing, Ra, Rz, Rq, Rt roughness parameters in one gauge
- large OLED display, with switchable backlight, „low-battery“ indicator
- On/Off push button, autom. shutdown after 3 min., with beep (start-test-ready)
- measuring range selectable in μm / μinch , parameter Ra (ISO and Rz DIN)
- min. probe tips curvature radius 10 microns ± 1 microns, angle $90^\circ +5^\circ / -10^\circ$
- different display values $< 12\%$, error indication $\pm 15\%$
- force measurement: 0.016 N, force measurement share: 800 N/m
- working temperature $-20^\circ\text{C} \sim +40^\circ\text{C}$, rel. humidity $< 90\%$
- tracing length 6 mm, tracing speed 1.0 mm / sec., sensor pressure 0.5 N
- integrated sensor protection, with simple calibration function
- incl. roughness standard plate Ra, accuracy acc. ISO class 3
- with 3.7 V Li-Ion rechargeable battery, incl. charger 9 V AC
- incl. operation manual

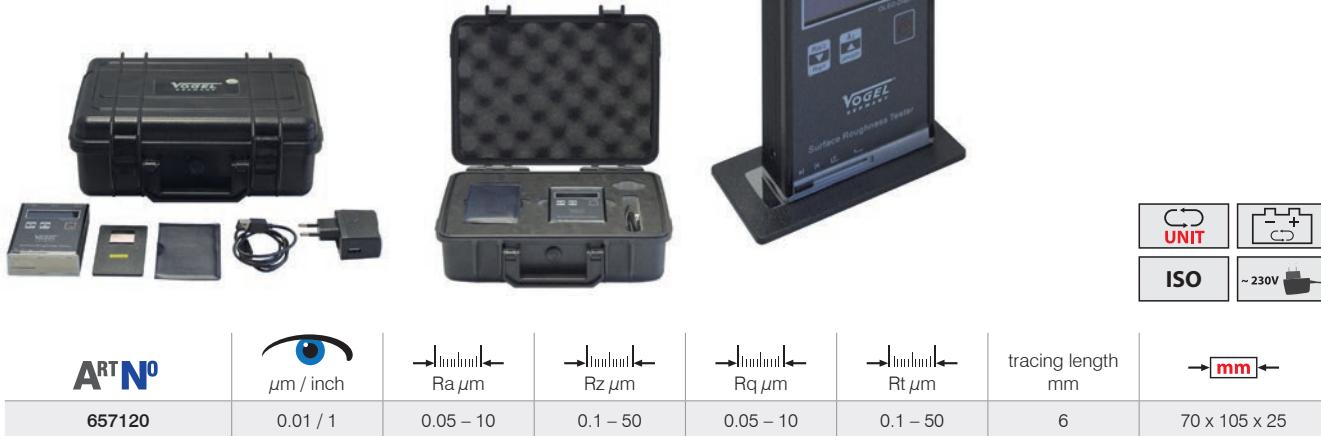

The image shows the VOGEL Surface Roughness Tester with its carrying case, accessories (probe, power adapter, software), and a detailed specification table.

ART No	$\mu\text{m} / \text{inch}$	Ra μm	Rz μm	Rq μm	Rt μm	tracing length mm	
657120	0.01 / 1	0.05 – 10	0.1 – 50	0.05 – 10	0.1 – 50	6	70 x 105 x 25



Icons below the table:

- UNIT (probe icon)
- ISO (battery icon)
- ~ 230V (power adapter icon)

Surface Finish Specimen „RUGOTEST“

- acc. to the norms NF E 05-501, ISO/R 468 and ISO 2632
- for testing surface roughness by sight and touch method (with finger-tip)
- available for all standard machining methods
- wear-resistant and made of stainless steel
- delivery with description


ART No 651001

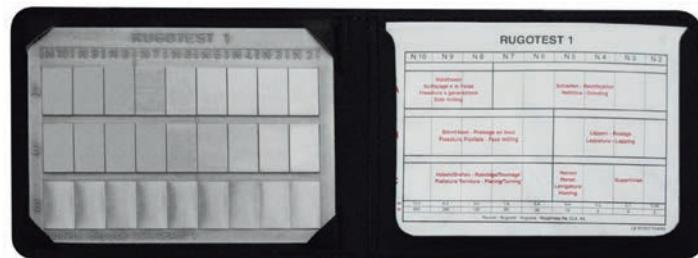

ART No 651101 – 651107



ISO

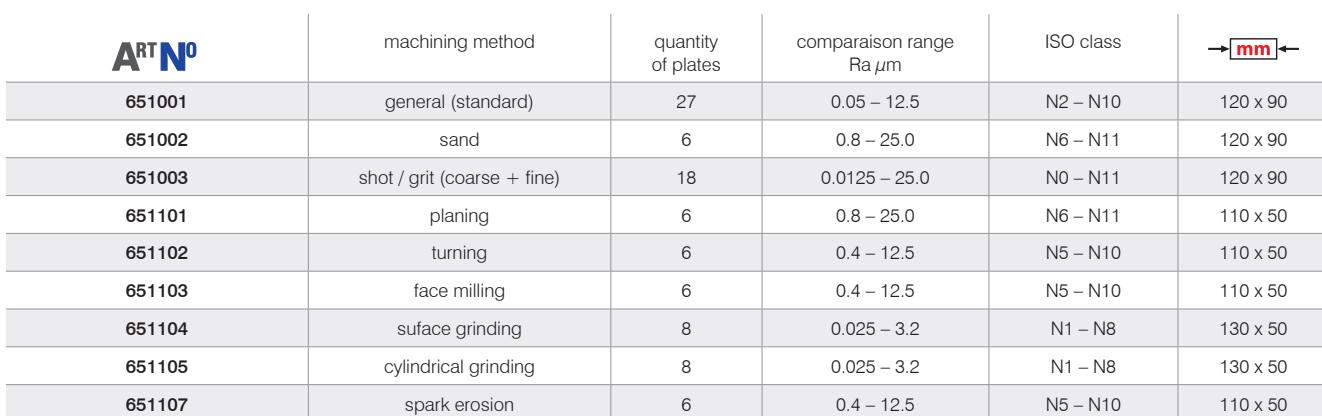

The image shows the RUGOTEST 1 specimen plate dimensions table, which lists the number of plates, comparison range, ISO class, and size for various machining methods.


ART No	machining method	quantity of plates	comparaison range Ra μm	ISO class	
651001	general (standard)	27	0.05 – 12.5	N2 – N10	120 x 90
651002	sand	6	0.8 – 25.0	N6 – N11	120 x 90
651003	shot / grit (coarse + fine)	18	0.0125 – 25.0	N0 – N11	120 x 90
651101	planing	6	0.8 – 25.0	N6 – N11	110 x 50
651102	turning	6	0.4 – 12.5	N5 – N10	110 x 50
651103	face milling	6	0.4 – 12.5	N5 – N10	110 x 50
651104	surface grinding	8	0.025 – 3.2	N1 – N8	130 x 50
651105	cylindrical grinding	8	0.025 – 3.2	N1 – N8	130 x 50
651107	spark erosion	6	0.4 – 12.5	N5 – N10	110 x 50

Surface Roughness Testers, Accessories


Electr. Digital Surface Roughness Tester

- high performance device, for professional demand
- for measurement of roughness parameters
- Rz, Ra, Rq, Ry, Rt, Rv, R3z, R3y, RzJIS, Rsk, Rku, Rsm, Rmr with USB 2.0 data output

- rugged ABS plastic housing, in ergonomic design
- large OLED display with clear reading and with backlight
- comprehensive information and graphic representations
- diamond tracer tip, 90°, radius 5 µm, contact power 4 mN (0.4 gf)
- standard acc. to ISO, DIN, ANSI, JIS
- digital filter RC, PCRC, Gauss, D-T13565, data memory 2 MB + 2 GB
- with built-in and rechargeable Li-Ion battery, charger 100 – 240 V / 50/60 Hz
- up to 10 hrs. permanent use, with calendar and RTC
- On/Off button, autom. power off, battery indicator
- selectable languages: english, german, chinese
- reliable software for the electrical motor drive
- connection to PC or printer, incl. interface cable
- incl. software, ground plate, calibration test block, standard tracer (art.-no.: 657210), with operation manual




extensive information and graphic representations



ART NO	Ra / Rq µm	Ro/Rt/Rp/Rv/R3z/R3y/ RzJIS/Rsk/Rku/Rsm/Rmr µm	max. %	cut-off length mm	mm
657113	Ra 0.005 – 16 / 0.02 – 160	± 0.6 %	< ± 10	< 6	0.25 / 0.8 / 2.5

Accessories for art.-no. 657113

- art.-no. 657210 tracer, straight (standard)
- art.-no. 657211 tracer, angled
- art.-no. 657212 tracer, for ø 3 mm bore depth
- art.-no. 657213 tracer, for ø 10 mm bore depth
- art.-no. 657214 Ra test block
- art.-no. 657218 stand
- art.-no. 657219 PC software for wireless data transfer

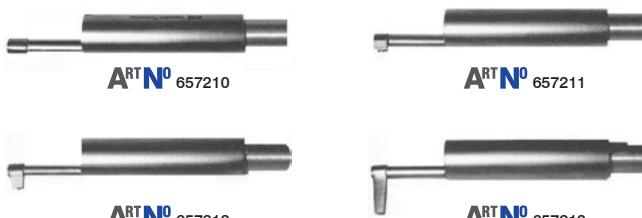

Example for a wireless transmission



**Image/Video Borescope Console • IP54
with 3.5“ TFT colour monitor,
with connection for all our hoses**


- top model for varied industry purposes, e.g. automotive-, machinery-, pipeline-, shipbuilding-, aircraft-, turbine-, wind power industry, and many more
- for quick, visual inspection and documentation, useful in hard to reach places
- with 3 adjustable LED's at the hose-end
- with USB 2.0, TV output (PAL), reset, mini-USB and micro SD slot
- spray water proof console, acc. to DIN 40050 / IEC 60529

- sturdy industry quality, housing with rubber cover, M6 thread insert
- 3.5 inch TFT colour monitor, monitor resolution 640 x 480 pixel
- photo taking (JPEG 1600 x 1200) and video recording (AVI)
- with zoom button (x2/x3/x4) and image freeze
- 180° frame rotation and mirror image
- 7 selectable languages, DE/EN/FR/ES/RU/JP/CN
- ON/OFF button, date/time function, power saving mode, battery status
- build-in flashlight (level-1/-2/-3)
- build-in rechargeable Li-ion battery
- incl. 4 GB memory SD card, USB power cable (USB/mini-USB), 240 V USB charger, AV cable, bracket with M6 thread, with operation manual



table stand with M6 thread

LED light (3 levels)

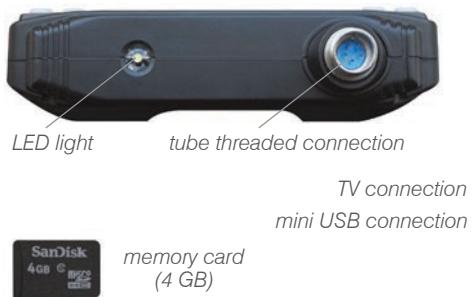

SD card slot



extendable table stand



USB charger



Backside
rear with rubberized housing protection



Backside
rear without rubberized housing protection



USB charger cable



AV cable



Example: brake discs control



ART NO

620003

Photo (JPG)

1600 x 1200

Video (AVI)

640 x 480

→ ←

145 x 95 x 37

Accessories for Borescopes

Image/Video Borescope Hoses • IP67
endoscope hoses with matching threaded connection
suitable for our model console (art.-no.: 620003)

- different hoses available
- oil-, water- and coolant proof, acc. to DIN 40050 / IEC 60529

- sturdy industry quality, flexible and semi-rigid design
- camera resolution 300.000 pixel
- perfect image recognition in the depth of field
- lenses with bright, white LED's
- 3 times adjustable LED light, console setting
- with operation manual

More hose types
available on request



hose
 \varnothing 3.7 mm or \varnothing 4.5 mm,
with 0° lens

above: hose \varnothing 9.0 mm,
with 0° and 90° lens



below: hose \varnothing 3.7 mm,
with 0° lens



rubberized grip for secure grip,
only at viewing direction 0° and 90°




hose \varnothing 9.0 mm,
with 0° and 90° lens

ART NO	hose mm	field of view °	hose-Ø mm	quantity LED	hose type	
					flexible	semi rigid
620050	1000	0	3.7	6	✓	✗
620051	3000	0	3.7	6	✓	✗
620052	5000	0	3.7	6	✓	✗
620055	1000	0	4.5	6	✗	✓
620056	3000	0	4.5	6	✗	✓
620057	5000	0	4.5	6	✗	✓
620060	1000	0 / 90	9.0	4 / 2	✗	✓
620061	3000	0 / 90	9.0	4 / 2	✗	✓
620062	5000	0 / 90	9.0	4 / 2	✗	✓



HIGH PRECISION
LASERCENTER

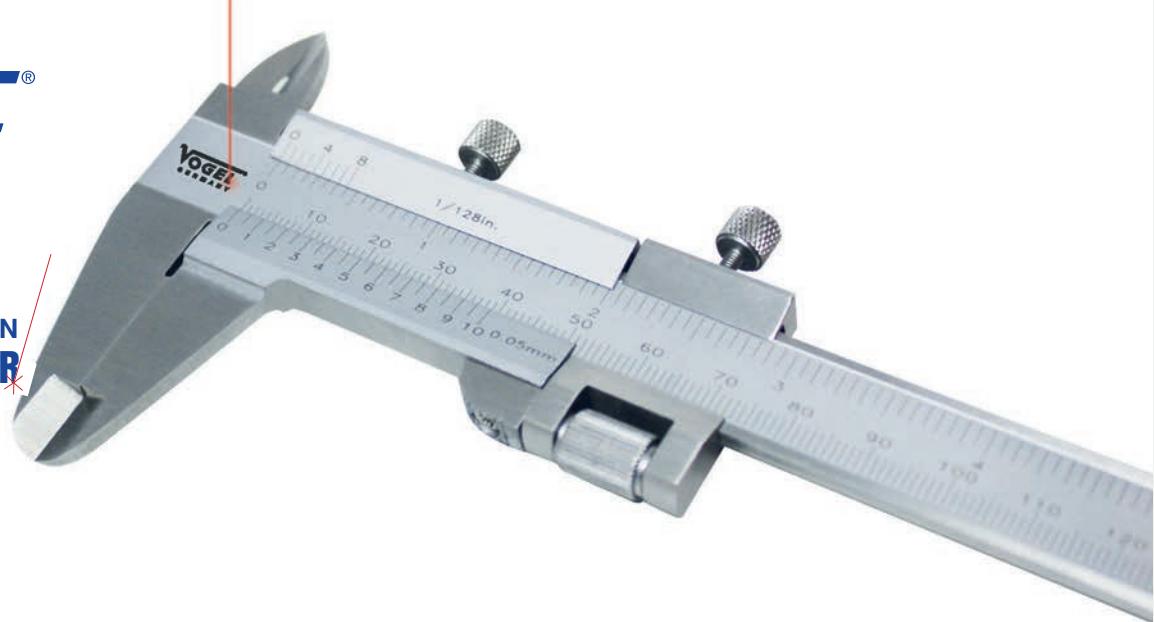

Modern technologies for high precision

Special scales, your logotypes, pictures, drafts etc.
There is nothing impossible.

Laser engraving has a lot of advantages.
One is the top quality, high accuracy and the long-life cycle.

Flexibility is an asset of Vogel Germany for your needs because manufacturing is on a low cost level.



Laser engravings are possible on:

- ✓ steel, high-grade steel, stainless steel
- ✓ cast iron
- ✓ non-ferrous metal
- ✓ special plastic material



Miscellaneous

Angle Measurer Spirit Levels.....	319
Digital Spirit Levels	320
Spirit Levels	321
Marking Ink, Dressing Paste, Special Cleaner.....	322
Universal Protractors.....	323
Stopwatches.....	324
Precision Magnifying Glasses.....	325 – 326
Magnifiers and Linen Testers	326
Precision Magnifying Glasses.....	327
Headband Magnifiers, LED illuminated Magnifiers	328
Inspection Tool Sets	329
Magnetic Lifters and Pressure Gauges	330
Inspection Mirrors.....	331
Stroke Counters	332
Handpiece Counter and Length Counter	333
Data Cables and Accessories for electr. Digital Measuring Devices.....	334
Data Processing.....	335 – 337
Batteries	337
LED Work Lights.....	338
Hand Refractometer.....	338

Image Directory • Miscellaneous

				
Page 319	Page 319	Page 320	Page 320	Page 321
				
Page 322	Page 322	Page 322	Page 322	Page 322
				
Page 322	Page 322	Page 322	Page 323	Page 323
				
Page 323	Page 323	Page 324	Page 324	Page 324
				
Page 325	Page 325	Page 325	Page 325	Page 325
				
Page 326	Page 326	Page 326	Page 327	Page 327
				
Page 327	Page 327	Page 328	Page 328	Page 328

Image Directory • Miscellaneous


				
Page 328	Page 329	Page 329	Page 329	Page 330
				
Page 330	Page 330	Page 330	Page 331	Page 331
				
Page 331	Page 331	Page 331	Page 332	Page 332
				
Page 332	Page 332	Page 333	Page 333	Page 333
				
Page 333	Page 333	Page 334	Page 334	Page 334
				
Page 334	Page 334	Page 334	Page 334	Page 334
				
Page 334	Page 334	Page 334	Page 334	Page 334

Image Directory • Miscellaneous


				
Page 334	Page 334	Page 334	Page 334	Page 334
				
Page 334	Page 334	Page 334	Page 334	Page 334
				
Page 334	Page 334	Page 334	Page 334	Page 334
				
Page 335	Page 335	Page 336	Page 336	Page 336
				
Page 337	Page 337	Page 337	Page 337	Page 337
				
Page 337	Page 337	Page 337	Page 337	Page 337
				
Page 337	Page 337	Page 337	Page 338	

Spirit Levels, Angle Measurer Spirit Levels

Electr. Digital Angle Measurer Spirit Level

- automatic calculation of single and double mitre angles without any other tools

- sturdy aluminium housing, with adjustable bevel blade
- large LCD display, digit height 12 mm, reading from all directions possible, with shiftable backlight
- rapid calculation and transfer of angles by means of memory function for frequently used angle dimensions
- power On/Off button, data hold function, shock resistant up to 1 m falling down
- precise mitre- and self-calibration function
- with 1x horizontal vial and 1x vertical vial
- with fixing screw for fixing the angle setting
- incl. 2x battery 1.5 V (type AAA, art.-no.: 90002)
- incl. operation manual



ART NO	0 - 225°	0.05°	0.1°	1 mm/m = ± 0.057°	440 x 60 x 25
711020					

Electr. Digital Angle Measurer Spirit Level

- for quick and accurate measuring of angular degrees, can also be used as a spirit level
- with 1x horizontal vial and 1x vertical vial
- sturdy aluminium housing, with adjustable bevel blade
- large LCD display with clear reading, digit height 12 mm
- On/Off and zero button, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual




ART NO	0° - 225°	0.1°	0.2°	1 mm/m = ± 0.057°	305 x 52 x 23
711025					

Electr. Digital Light Alloy Spirit Levels

Electr. Digital Spirit Level

• for trade and industry

- rugged, rectangular profile, made of light alloy
- large LCD display with clear reading, digit height 12 mm, with shiftable back light
- display always appears in the reading direction no matter which direction the device is rotated
- conversion between ABS- and INC-measurement
- calculation of ascend/descend, angle and deviation
- with self-calibration function
- power On/Off button, data hold function
- with 1 x horizontal vial and 1 x vertical vial
- incl. 2x 1.5 V battery (type AAA, art.-no.: 90002)
- with operation manual



ART NO	4 x 90°	0.1°	max. ± °	→ mm ←
712020			0.2°	416 x 50 x 21



Electr. Digital Light Alloy Spirit Level

• with cross laser, angle degree indicator and percent deviation

- rugged, rectangular profile, made of light alloy, with ribbed surface
- large LCD display, digit height 10 mm, reading from all directions possible
- switchable display in angle-, percentage measuring- and tangent-mode
- On/Off button, data hold function and memory function
- magnetic inserts in the bottom and M6 thread for tripod attachment
- with each 1x horizontal and 1x vertical vial
- with self-calibration and switchable cross laser, range about 7 m (inside)
- incl. 1x 9 V battery (type 6LR61, art.-no.: 90006), with operation manual



with magnet inserts and M6 thread
for tripod attachment

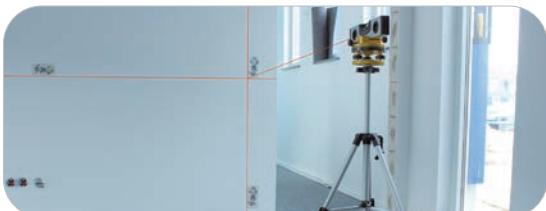

ART NO	4 x 90°	0.05°	max. ± °	→ mm ←
712010			0.1	225 x 57 x 25

Explore our
Website.

www.vogel-germany.de



VOGEL
GERMANY
Measuring Solutions

Any questions?

We are pleased to advise.

Spirit Levels „NIVEAU NORM“

• top quality spirit levels with plane surfaces

- rugged light alloy rectangular profile, from up 1500 mm length with extrem solid wallthickness
- with 1x horizontal vial and 1x vertical vial
- barrel-shaped vials with patented SOLID built-in system, permanent fixed and constantly aligned with the profile
- surfaces in stratosilver elocated
- measuring accuracy adjusted by electronical adjustment and at final inspection
- measuring accuracy in normal position 0.5 mm/m = 0.029°, with reversal measurement minimum 0.75 mm/m = 0.043°

art.-no.: 714100 – 714110

- with strong adhesive magnet in the measurement base



plane, rectangular aluminium profile,
extruded and warm cured

A^{RT}N^o 714000 – 714010



without magnets

A^{RT}N^o 714100 – 714110



with strong adhesive magnet in the measurement base

A^{RT}N^o 714000 – 714010



A^{RT}N^o 714100 – 714110



A^{RT}N^o	→ mm ←				
714000	200	50 x 22	X	0.5 mm/m = ±0.029°	
714001	300	50 x 22	X	0.5 mm/m = ±0.029°	
714002	400	50 x 22	X	0.5 mm/m = ±0.029°	
714003	500	50 x 22	X	0.5 mm/m = ±0.029°	
714004	600	50 x 22	X	0.5 mm/m = ±0.029°	
714005	800	50 x 22	X	0.5 mm/m = ±0.029°	
714006	1000	50 x 22	X	0.5 mm/m = ±0.029°	
714007	1200	50 x 22	X	0.5 mm/m = ±0.029°	
714008	1500	50 x 22	X	0.5 mm/m = ±0.029°	
714009	1800	50 x 22	X	0.5 mm/m = ±0.029°	
714010	2000	50 x 22	X	0.5 mm/m = ±0.029°	
714100	200	50 x 22	✓	0.5 mm/m = ±0.029°	
714101	300	50 x 22	✓	0.5 mm/m = ±0.029°	
714102	400	50 x 22	✓	0.5 mm/m = ±0.029°	
714103	500	50 x 22	✓	0.5 mm/m = ±0.029°	
714104	600	50 x 22	✓	0.5 mm/m = ±0.029°	
714105	800	50 x 22	✓	0.5 mm/m = ±0.029°	
714106	1000	50 x 22	✓	0.5 mm/m = ±0.029°	
714107	1200	50 x 22	✓	0.5 mm/m = ±0.029°	
714108	1500	50 x 22	✓	0.5 mm/m = ±0.029°	
714109	1800	50 x 22	✓	0.5 mm/m = ±0.029°	
714110	2000	50 x 22	✓	0.5 mm/m = ±0.029°	

Marking Ink, Dressing Paste, Special Cleaner

EMIL OTTO • Marking Ink

- for the marking of machining points on surfaces
- as marker, in a spray bottle or in a plastic canister available
- dries within seconds
- non-reflective fluid
- good adhesions and can be removed easily
- 2 different colours available



ART No 262601



ART No 262603



ART No 262615



ART No 262604



ART No 262611



ART No	colour	contents ml	marker	spray bottle	canister
262601	blue	30	✓	—	—
262603	blue	500	—	—	✓
262604	blue	1000	—	—	✓
262605	blue	500	—	✓	—
262611	red	30	✓	—	—
262613	red	500	—	—	✓
262614	red	1000	—	—	✓
262615	red	500	—	✓	—

EMIL OTTO • Dressing Paste

- the test pieces are covered with the dressing paste, then moved one after the other or on a dressing plate: by this the paste forms a colour coat, showing the evenness
- easy to remove
- 2 different colours available
- delivery in a tube or in a plastic box



ART No	colour	contents ml	tube	box
262631	blue	80	✓	—
262632	blue	250	—	✓
262641	red	80	✓	—
262642	red	250	—	✓

EMIL OTTO • Special Cleaner

- this cleaner dissolves dressing paste, marking ink etc.
- skin friendly (art.-no.: 262645)
- delivery in a spray can or canister



ART No 262645



ART No 262644

ART No	contents ml	spray can	canister
262644	1000	—	✓
262645	500	✓	—

Universal Bevel Protractors, Anglemeters

Electr. Digital Angle-Sensor

„Bevel-Box“ and „Level-Box“ • IP54

- dust- and splash water proof acc. to DIN 40050 / IEC 60529
- ideal device for angle adjustment, can be used for many purposes
- rugged metal housing
- large LCD display with clear reading, digit height 10 mm
- with 3 magnetic discs in the bottom of the housing
- with On/Off-, zero- and ABS button, data hold function
- art.-no. 32 0011 added with a vial on top of the housing
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual




ART NO 320010

ART NO 320011



magnetic discs



ART NO					
320010	± 180°	0.1°	± 0.1°	50 x 50 x 32	
320011	± 180°	0.1°	± 0.1°	50 x 63 x 32	

Electr. Digital Angle-Sensor

with 90° swiveling LCD display • IP54


- dust- and splash water proof acc. to DIN 40050 / IEC 60529
- ideal device for angle adjustment, can be used for many purposes
- large LCD display, with clear reading, digit height 8 mm
- LCD display swivelling up to 90°, with direction indicating vial in the display
- with magnetic V-base
- On/Off button and data hold function
- incl. 2x 1.5 V battery (type AAA, art.-no.: 90002), with operation manual



magnetic V-base



swivelling display



ART NO					
320015	± 180°	0.1°	± 0.1°	55 x 57 x 32	

Electr. Digital Protractor • IP65

- water- and coolant proof acc. to DIN 40050 / IEC 60529
- ideal device for precise leveling and measuring of flatness and squareness, can be used for many purposes


- sturdy housing with aluminium V-prism at top and bottom side
- art.-no. 320016 additionally with magnetic discs in the V-bottom
- large LCD display, with clear reading, digit height 9 mm
- with acoustic signal and backlight
- autom. 180° rotating display, by turning up-side down
- with data hold function, ABS system, with easy to handle self calibration
- On/Off- and zero button, zero setting at any position
- incl. 2x 1.5 V battery (type AAA, art.-no.: 90002), with operation manual



ART NO 320016



magnetic base



ART NO					
320013	4 x 90° (0 – 360°)	0.05°	± 0.15°	150 x 33 x 60	X
320016	4 x 90° (0 – 360°)	0.05°	± 0.15°	150 x 33 x 60	✓

Stopwatches

Electr. Digital Stopwatch

- for standard requirements
- with 2-button-operation
- sturdy ABS-plastic housing
- LCD display with clear reading
- start / stop / reset-addition / split / dual measuring
- incl. 1x 1.5 V battery (type SR54, art.-no.: 90310), with lanyard and operation manual



ART No	sec.	indicating range hrs. / min. / sec.	LCD digits	digit height mm	mm
580210	1/100	9 / 59 / 59.99	7	6.5	66 x 70 x 21

Electr. Digital Stopwatch • IP54

- for standard requirements
- with 3-button-operation
- sturdy ABS-plastic housing
- splash water proof acc. to DIN 40050 / IEC 60529
- LCD display with clear reading
- start / stop / reset-lap / split / daytime / date / alarm with snooze
- art.-no. 580505 with 1.5 V battery (type LR44, art.-no.: 90213), art.-no. 580506 with 3 V battery (type CR2032, art.-no.: 90112)
- with lanyard, protection pouch and operation manual

additional functions for art.-no. 580506

- memory for 10 laps
- recall of lap and split times

ART No 580505



ART No 580506



ART No	sec.	indicating range hrs. / min. / sec.	LCD digits	digit height mm	mm
580505	1/100	9 / 59 / 59	6	11	85.5 x 64 x 22
580506	1/100	9 / 59 / 59.99	7	5 / 4	85.5 x 64 x 22



Send us a
partnership request



OXOMI.com



Complete catalogue
assortment searchable
on OXOMI.com

LED Handheld Magnifier

- with 3 powerful bright LED lights

- high tech optic, hardened lens surface
- frame and handle made of rugged ABS plastic
- incl. 3x 1.5 V battery (type AAA, art.-no. 90002), with operation manual



ART NO	size of lense Ø mm	magnification	quantity LEDs	LED light colour	→ mm ←
600145	75	3 x	3	white	195 x 85 x 30
600148	90	2.5 x	3	white	210 x 105 x 30

Precision Technical Magnifier

- with LED-Light and exchangeable scales

- tempered glass-lenses, housing made of aluminium / ABS / PE
- delivery with crosshair at:
- art.-no. 601126 = 10 – 0 – 10 mm scale, graduation 0.1 mm, scale-Ø 26 mm
- art.-no. 601135 = 12 – 0 – 12 mm scale, graduation 0.1 mm, scale-Ø 35 mm
- adjusting by focus-ring, exchangeable measuring scales
- attachable LED unit, bright, white LED light
- incl. 3x 1.5 V battery (type LR41, art.-no.: 90203)



ART NO 601126

ART NO 601135



Exchangeable Scales

- tempered glass lenses, please mention type code and outside diameter!

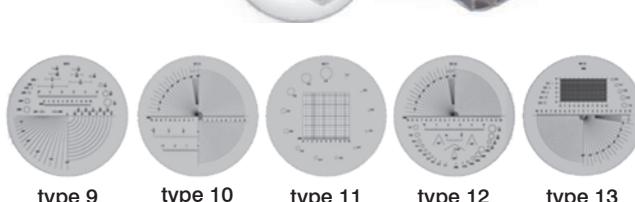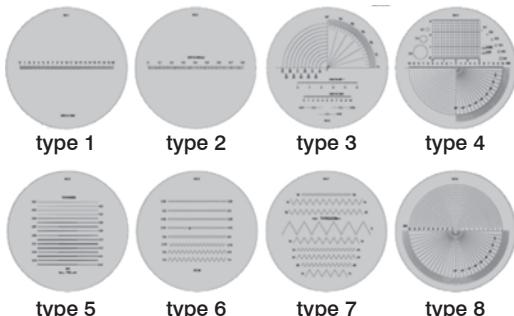

LB41
1.5V

ART NO	size of lens Ø mm	magnification	→ mm ←
601126	18.5	10 x	95 x 70 x 65
601135	21.0	10 x	95 x 70 x 65

LED Handheld Magnifier

- very popular model

- alicate glass optic, scratch-resistant and solvent-resistant
- with high power LED, rugged ABS-plastic housing
- with aplanatic lens
- incl. 3x battery 1.5 V (type AAA, art.-no.: 90002)



ART NO	size of lense Ø mm	magnification	→ mm ←
600166	30	10 x	38 x 105 x 25
600167	21	15 x	38 x 105 x 25

Precision Magnifiers and Linen Testers

Watchmaker Magnifiers and Stone Magnifiers

- suitable for craftsmen and industry
- biconvex silicate lens
- flame resistant plastic housing, with air hole to cope up with steaming




ART No	size of lense Ø mm	magnification
600194	25	7 x
600195	25	10 x

Technical Stand Magnifiers

- with measuring scale
- for precise measurements between scale lines, spaces, etc.

- adjustable aplanatic lens
- black chromed metal housing
- stainless steel scale, with clear graduation

More scales as spare part
are available on request!

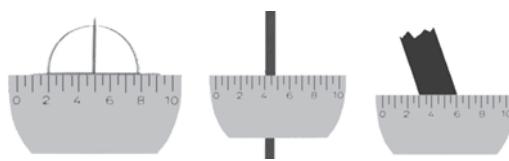

ART No	size of lense Ø mm	magnification	length of scale mm	eye mm	possibility of reading mm	CC
600178	20	10 x	10	0.10	0.025	25.00
600180	20	8 x	10	0.10	0.025	25.00
600179	20	6 x	20	0.10	0.025	25.00

Linen Testers

- product for highest demands
- biconvex lens, optically ground silicate glass
- precision brass body, satin chromed



ART No	size of lense Ø mm	magnification	height mm	cut-out mm
600200	12.5	12 x	23	10 x 10
600201	14.5	10 x	27	15 x 15
600202	17.5	8 x	33	20 x 20
600204	31.5	5 x	53	30 x 30

Precision Magnifiers and LED Lamp

Precision Folding Magnifier

- popular technical folding magnifier
- compound triple lens, aplanatic lens precision glass optic
- polished chrome plated metal housing, with loop
- metal lens frame, wrapped with black rubber



ART NO	size of lense Ø mm	magnification	→ [mm] ←
600150	18	10 x	35 x 23 x 18

Precision Folding Magnifier

- proven technical folding magnifier
- precision glass optics
- satin chrome plated brass housing, with loop
- black lacquered metal lens frame



ART NO 600159



ART NO	size of lense Ø mm	magnification	type of lense		→ [mm] ←
			aplanatic	biconvex	
600153	20.3	10x	✓	—	39 x 39 x 34
600159	30	4x + 6x = 10x	—	✓	42 x 27 x 56

Magnifier with LED Lamp

- in pocket size
- with 3 magnifying lenses
- 3x, 5x and 7x magnification
- with one extra bright LED lamp
- in a rugged ABS-plastic housing
- incl. 2x 3 V battery (type CR2032, art.-no.: 90112)



ART NO	magnification	field of view mm	→ [mm] ←
601230	3x / 5x / 7x	50 x 50 / 25 x 20 / 25 x 20	117 x 61 x 9

Head-Wearing Magnifier, Illuminated Magnifiers and Accessories

Head-Wearing Magnifier

- with swiveling LED-Lamp, detachable
- total new model with 2 powerful LED lights
- ideal for technicians, watchmakers, electronics techn., dentists, etc.

- frame is made of high-quality plastic
- forehead and headband with adjusting screws for perfect fit
- with 5 different lenses of high-quality, with special surface treatment
- 11 magnification possibilities with 2 attachable lenses, up to 6x magnification
- incl. 3x 1.5 V batteries (type AAA, art.-no.: 90002), with operation manual



ART No	magnification possibility	quantity lenses	field of view mm	quantity LEDs	LED light colour	working distance mm
600230	1-x / 1.5-x / 2-x / 2.5-x / 3-x / 3.5-x / 4-x / 4.5-x / 5-x / 5.5-x / 6-x	5	110 x 40	2	white	60 - 350

Professional LED Illuminated Magnifier

- with articulated arm
- adjustable at any position, with 360° rotation
- metal body, powder coated, insulation lamp housing made of rugged plastic
- with extra large and precision glass lens, 3 dpt.
- with table clamp, cable inside of the arm, overload category CAT I
- with extra bright LED's, mounted around the lens

ART No 600350



ART No	voltage	magnification	field of view mm	total throat mm
600350	230	1.75 x	ø 127	900
600354	230	1.75 x	190 x 160	900

Accessories for Illuminated Magnifiers



ART No	article description	suitable for art.-no.
600337	table clamp	600350 + 600354

Inspection Tool Kits and Magnetic Tray

Inspection Tool Kit

- multipart set, especially for garages, mechanics, plumbers, etc.
- well assembled kit for professional users

5-piece set, contents:

- stainless steel telescope bar with quick release, non-slip grip, 530 mm working length
- socket with ultra bright NICHIA LED-Licht, incl. 3x 1.5 V battery (type LR44, art.-no.: 90213)
- socket with powerful magnet, 8lb, for to pick up and hold metal objects in hard to reach places
- inspection mirrors, with perfect reflection, no deterioration in the mirror mounted in a stainless steel frame, 360° rotatable, one mirror in ø 50 mm and one mirror rectangular 60 x 40 mm
- in a strong case with zip

7-piece set, contents:

- quality claw pick-up device, semi-rigid hose, 400 mm length
- stainless steel telescope bar with quick release, non-slip grip, 530 mm working length
- socket with ultra bright NICHIA LED light, incl. 3x 1.5 V battery (type LR44, art.-no.: 90213)
- socket with powerful magnet, 8lb, for to pick up and hold metal objects in hard to reach places
- inspection mirrors, with perfect reflection, no deterioration in the mirror mounted in a stainless steel frame, 360° rotatable, one mirror in ø 50 mm and one mirror rectangular 60 x 40 mm
- stainless steel tray, ø 110 mm, with powerful permanent magnetic bottom for small parts
- in a strong case with zip



Price / Performance:
good - excellent



ART NO 474471



ART NO	→ set	telescope bar	LED	mirror ø 50 mm	mirror 60 x 40 mm	magnet	claw pick-up	magnetic tray
474470	5-pcs.	✓	✓	✓	✓	✓	✗	✗
474471	7-pcs.	✓	✓	✓	✓	✓	✓	✓

Magnetic Tray

- stainless steel, polished
- with powerful permanent magnet bottom



ART NO	Gauss	→ mm
474475	1000 – 1200	ø 150

Magnet Lifters

Magnet Lifter

- professional model for the technician
- with quick release
- with telescope bar

- socket with magnet
- telescope bar, stainless steel
- 360° rotatable and swivel joint
- insulated handle, with clip



INOX

ART NO	mm	kg
474441	~650	8

Magnet Lifter

- with telescope bar
- telescope bar, stainless steel, with clip
- art.-no. 334614 additionally with scribe




ART NO 334614

ART NO	mm	kg
474442	~ 530	3.5
334614	~ 650	1.0

Electr. Digital Tire Pressure Gauge

- for quick and independent measuring of the tire pressure

- sturdy ABS plastic housing
- large LCD display with clear reading, digit height 9.5 mm
- LCD display with backlight
- lighted valve tip
- On/Off button, autom. shutdown
- units in PSI, Bar, Kgf/cm², Kpa, switchable
- reading 0.1 PSI; 0.01 Bar; 0.01 Kgf/cm²; 1 Kpa
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

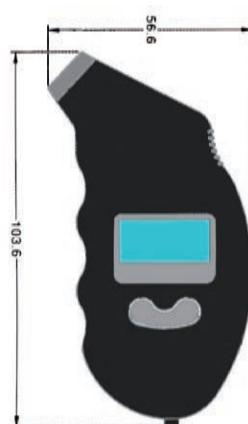

ART NO	for cars	PSI	Bar / Kgf/cm²	Kpa	%
214460	✓	0 - 100	0 - 7 / 0 - 7	0 - 700	1 %

Professional Inspection Mirrors

Professional Inspection Mirror

- with telescope bar

- stainless steel telescope bar
- 360° rotatable and swivel joint
- insulated handle



INOX

ART No	mm	mm
474452	~ 610	ø 40
474453	~ 620	ø 50
474454	~ 620	43 x 65

Professional Inspection Mirror

- with telescope arm and LED light

- stainless steel telescope bar
- 360° rotatable and swivel joint
- with clip
- detachable LED light, switchable
- incl. 3x 1.5 V battery (type LR41, art.-no.: 90203)



LB41
1,5V

ART No	mm	mm
474465	~ 610	ø 26

Professional Inspection Mirror

- with 5x magnification and telescope bar

- stainless steel telescope bar
- 360° rotatable and swivel joint
- insulated handle



INOX

ART No	mm	mm
474460	~ 610	ø 24
474461	~ 510	ø 55

Stroke Counters

Stroke Counter

ART No 477003

- zero reset by means of turning knob
- adding in one stroke direction
- the lever can be relocated at any position of the driving shaft and returns automatically to the basic position
- movement of stroke min. 38°, max. 60°
- driving shaft righthand side or lefthand side available

ART No 477001



driving shaft at right side



ART No	ART No	revolution max. 1/min.	quantity of digits	digit height mm	driving shaft-Ø mm	base plate mm	height mm
477001	477002	500	5	4.5	4.0	40 x 46	27.5
477003	477004	500	5	4.5	4.0	60 x 29	27.5

driving shaft at left side



ART No	ART No	revolution max. 1/min.	quantity of digits	digit height mm	driving shaft-Ø mm	base plate mm	height mm
477005	477006	500	5	4.5	4.0	40 x 46	27.5
477007	477008	500	5	4.5	4.0	60 x 29	27.5

Stroke Counter

ART No 477010

- zero reset by means of detachable key
- adding in one stroke direction
- the lever can be relocated at any position of the driving shaft and returns automatically to the basic position
- movement of stroke min. 38°, max. 60°
- driving shaft righthand side and lefthand side

ART No 477012



driving shaft at right and left side



ART No	ART No	revolution max. 1/min.	quantity of digits	digit height mm	driving shaft-Ø mm	base plate mm	height mm
477010	477011	500	6	4.5	4.0	60 x 70	28.0
477012	477013	500	7	7.0	7.0	120 x 64	45.0

Manual Piece Counters and Length Counters

Mechanical Manual Piece Counter

- for counting the number of people in cinemas, at sporting events, at ski lifts, etc.
- also for counting piece parts when taking inventory, during production or when counting traffic
- sturdy metal housing
- available with retaining ring, table mounting or wall mounting

ART No 477103



ART No 477101



ART No 477102

ART No with retaining ring	ART No with table mounting	ART No with wall mounting	quantity of digits	digit height mm	housing-ø mm	base plate-ø mm
477101	477102	477103	4	4,5	47	65

Length Counter (Meter Counter)

- zero reset by means of detachable key
- adding in one turning direction and in backwards turning minus
- standard: 5 rev. = 10 figures = 1.0 m by 20 cm measuring wheel circumference
- measuring range: 99.999,9 m (red decimal display)
- revolution max. 100 m/min. with measuring wheel
- revolution max. 300 m/min. without measuring wheel
- driving shaft righthand side and lefthand side



driving shaft at right and left side



ART No	revolution max. 1/min.	quantity of digits	digit height mm	driving shaft-ø mm	base plate mm	height mm
477130	100 / 300	6	4.5	4.0	60 x 70	28.0

Measuring Wheel

- made from various material and with several surfaces

Other bore hole- and wheel-diameters
on request!




ART No	measuring wheel- circumference cm	bore hole-ø mm	plastic / hytrel ribbed	aluminium / rubber nap version	aluminium / knurled
477140	20	4.0	✓	—	—
477141	20	4.0	—	✓	—
477142	20	4.0	—	—	✓

Data Cables and Accessories for Electr. Digital Devices


	ART NO	article description	ART NO	article description
	2040101	WiFi	209001	Interface USB - Mini-USB, 0.01 mm / 0.001 mm, with data key compatible with
	2040102	WiFi Mini-USB	209010	foot switch made of metal, with cinch plug 2.5 mm
	2023100	PROXIMITY - RS232 Software	209011	foot switch made of metal, with cinch plug 3.5 mm
	2023101	PROXIMITY - USB Software	2023105	wireless data transfer transmitter module for measuring devices with proximity interface
	2424101	POWER - USB, external power Software	2023104	wireless data transfer USB receiver (up to 15 m distance)
	2020188	USB - RS232, adapter (optional suitable for 2323100)	2023106	wireless data transfer USB receiver Bluetooth®
	2420192	USB - Mini-USB (with data key) optional, additional available: foot switch (art. no. 209011)	209000	Bluetooth® transmitter
	2420194	USB-PC - Duo-Data output interface box with data key and with foot switch port (connectivity also for Mitutoyo Digimatic measuring devices) optional, additional available: foot switch (art.-no.: 209011)	209009	Bluetooth® transmitter Mini-USB
	3420195	USB - Mini-USB interface box with data key and with foot switch port optional, additional available: foot switch (art.-no.: 209011)	209006	WiFi transmitter
	230139	USB - Mini-USB interface box with data key and with foot switch port optional, additional available: foot switch (art.-no.: 209011)	209007	WiFi receiver
			209008	WiFi transmitter Mini-USB
			2401961	Interface Adapter DIGIMATIC
			2401962	Interface Adapter Bluetooth®
			2401953	data cable USB - V2.0 ~ 2m
			2401954	data cable DIGIMATIC - V2.0 ~ 2m
			2401955	data cable U-Wave - V2.0 ~ 2m
			2401956	Transmitter
			2401957	Receiver
			2401958	USB Bluetooth® V4.0 dongle included

T-BOX, Interface box

- data transfer device through keyboard codes, that means the T-Box, can be used with any software by manual input, e.g. MS-Excel®
 - USB keyboard interface with different inputs
 - power supply via USB interface
 - no special software for the USB interface is needed
 - the USB interface is seen as a key board
 - other settings such as language, separators, measuring devices and timer
 - foot switch port, data key at measuring device/cable for data transfer or via timer
 - RS232C interface* for over 60 measuring devices
 - incl. USB cable and operation manual
- * plug assignment like at a PC interface (COM). For various OptoRS232 and RS232 measuring devices. Original data cables can be used.



ART No 2002095



ART No 2002097



ART No

2002095

data ports

→ mm ←

168 x 122 x 52

2002097

3x Mitutoyo Digimatic; 2x Opto RS232C, 9-pin

168 x 122 x 52

Keyboard Interface

- with measuring equipment cable and data key in one device
- USB keyboard interface with various ports (optional)

- power supply via USB interface
- no special software for the USB interface is needed
- the USB interface is seen as a key board
- other settings such as language, separators, measuring devices and timer
- data key at measuring device/cable for data transfer or via timer
- with operation manual



ART No

2002610

data ports

2002611

Opto RS232 C

Proximity



Electr. Digital LCD Display

- better reading over long distances, for quality control
- display with red, green or yellow digits available
- operation with data cable or wireless
- data ports for Opto RS232C, RS232C or (Mitutoyo Digimatic on request!)
- digit height 25 mm, 7-digits or digit height 57 mm, 6-digits (incl. pre-signs)
- two tolerance limits -OT / UT- for good- / bad evaluation
- display with 3 LED's in red / green and yellow
- housing form is designed as stand alone or for wall mounting
- incl. power supply 220 V and operation manual



ART No
OPTO RS232C
without LED's

ART No
OPTO RS232C
with LED's

ART No
RS232C
with LED's

ART No
Opto RS 232 + RS 232
without LED's

with cable connection

wireless operation

2002220

2002221

2002222

2002230

254 x 56 x 91.5



Data Processing

Measurement Data Transmission System WiFi

- wireless transmission of measurement data for max. up to 8 measurement instruments from measurement instrument to PC via WiFi adapter
- transmitter (art.-no.: 209006)
- receiver (art.-no.: 209007)
- transmitter and receiver as set (art.-no.: 2040101)

as a SET
ART NO 2040101



example for
Micrometers



example for
Dial Indicators



example for
Calipers



example for
Depth Calipers



example wireless data transmission
via WiFi



Measurement Data Transmission System „I-DAS“

- Measurement data transfer via USB interface to PC
Data management via standard software, for example MS Excel®
- cable and interface selection can be found on page 334

example measurement data transmission
via USB interface



ART NO 2420192



Measurement Data Transmission with Data Box

- Connection via USB data cable,
also suitable for Digimatic connection (Mitutoyo compatible)
- Data box with USB cable connection (art.-no.: 2420194)
- Footswitch with cable connection (art.-no.: 209011)

example measurement data transmission via duo data output
(via USB interface or for Mitutoyo Digimatic)

ART N° 2420194



individual components
can be found on page 334

ART N° 209011



Batteries

ART N°	battery type	voltage
90006	6LR61 (Alkaline)	9.0
90003	AA (Alkaline)	1.5
90002	AAA (Alkaline)	1.5
90052	AAA (rechargeable)	1.5
90001	AAAA (Alkaline), LR61	1.5
90213	LR44	1.5
90101	CR1632	3.00
90110	CR2016	3.00
90112	CR2032	3.0
90008	MN21 23 (Alkaline)	12
90004	LR14 (C-Cell)	1.5



ART N° 90112



ART N° 90110



ART N° 90101



ART N° 90213



ART N° 90008



ART N° 90001



ART N° 90002



ART N° 90003



ART N° 90004



ART N° 90006

Work Lamp and Hand-Held Refractometers

LED Work Lamp

- modern work lamp
- designed for universal working places

- sturdy housing
- with rubber covered handle
- with hand strap, ON/OFF pressure switch
- 52 bright white LED's at the side and one LED at the top
- incl. 3x 1.5 V battery (type AA, art.-no.: 90003)



magnetic bottom



ART NO

quantity of LED's

LED light colour

→ mm ←

600025

52 + 1

white


280 x 42 x 42

Hand-Held Refractometer

- refractometers are optical precision instruments for measuring the optimal concentration of liquids


- rugged stainless steel housing with rubber handle
- with adjusting screw, folding cover, okular with rubber eye cup, quality optic
- incl. operation manual

ART NO 653200




ART NO 653200

scale reading



ART NO 653210



ART NO 653211

Further instruments available on request



ART NO	application range			→ mm ←
653200	lubricants, coolant liquids, fruit, juices, wines, etc.	0 – 32 % Brix	±0.20 %	170 x ø -29
653210	automotive industry (standrad)	E: -40 °C – 0 °C P: -50 °C – 0 °C B: 1.10 – 1.40 SG	±5 °C ±5 °C ±0.01 SG	153 x ø -29
653211	automotive industry (universal with Adblue) Adblue concentration, coolant liquids, antifreeze, detergents and battery acidity	Adblue: 30 – 35 % E: -40 °C – 0 °C P: -50 °C – 0 °C B: 1.10 – 1.40 SG	5 °C 5 °C 0.01 SG	170 x ø 29

Repair Service

Benefit from our many years of experience in the repair of measuring tools and the procurement of spare parts and accessories. By having the measuring tools checked by us or our calibration laboratory, you save time, money and unnecessary transport when troubleshooting errors.

Repair, adjustment and testing / calibration from a single source ensure that your measuring tools are in perfect condition.

Overview of services:

- ✓ Visual and functional test
- ✓ Dismantling and cleaning
- ✓ Replacement of the defect parts
- ✓ Assembly with function test
- ✓ Calibration if desired

Any questions?

We are happy to help.



Index

		Page			Page
A	Addition Micrometers	113		Digital Micrometers	92 – 97
	Addition Rules	43		Digital Protractors	199
	Anemometers	308		Dividers, Compass Vernier Calipers	197 – 198
	Angle Measuring Devices	323		E Edge Finders	175 – 176
	Angle Plates	270		Endoscopes	311 – 312
	Anti Corrosion Oil	262		Etching Pens	204
	Assembly Rules	34		External Spring Joint Compass	197
B	Batteries	337		F Feeler Gauges, Spare Blades	235
	Bevel Box	323		Flange Squares	220
	Bevel Edge Squares	217		Folding Rules	45
	Bevel Protractors (universal and digital)	199 – 202		Force Gauges	294
	Bevel Squares	223		G Gauge Block Accessories	260 – 261
	Bore Micrometers and Accessories	120 – 127		Gauge Block Sets	255 – 259
	Brake Disc-, Brake Drum Calipers	75 – 76		Gear Teeth Calipers	77
	Brake Fluid Tester	304		H Hand Lamps	338
	Button	196		Hand Tachometer	292
	Button Gauges	78		Hard Stone Plates and Angles	263 – 265
C	Calipers	57		Hardness Testers	280 – 282
	• Brake Disc-, Brake Drum Calipers	75 – 76		Height Measuring Devices and Height Marker Gauges	211 – 213
	• Pocket Calipers, analog	65 – 66		Holder for Feeler Gauges	235
	• Pocket Calipers, digital	57 – 63		Hole Gauges	241
	• Depth Calipers, analog	82		I Illuminated Magnifiers	325 – 328
	• Depth Calipers, digital	79 – 81		Infrared Thermometers	306
	• Workshop Calipers, analog	71 – 72		Inside Micrometers	115 – 129
	• Workshop Calipers, digital	68 – 70		Internal Micrometers and Accessories	129 – 131
	• Groove Caliper, analog and digital	74		J Jet Gauges	241
	• Dial Calipers	67		K Keyway Calipers	242
	Care Products and Spray	262		Knife Straight Edges	217
	Care Set for Hard Stone Tables	266		L Lamellar Magnetic Blocks	209
	Circumference Measuring Tapes	33		Lapping Table Plates	269
	Clamp Holders	170		Laser Distance Meters	47 – 48
	Clamp Voltage Testers	300		Length Counters	333
	Coating Thickness Gauges	285 – 286		Level Scales	271 – 272
	Combination Squares	221		Limit Plug Gauges	246
	Compact Scales	294 – 297		Limit Thread Plug Gauges	246 – 250
	Comparators	262		Linen Tester	326
	Control Plates	263		M Magnet Feet	183
	Crane Scales	298 – 299		Magnet Testers	304
	Crank Pin Level Scales	272		Magnet, Measuring and Clamping Prisms	208 – 209
	Crankshaft Test Instruments	171		Magnetic Measuring Stands and Accessories	177 – 186
	Cutting Gauges	238 – 240		Magnifiers	325 – 328
D	Data Acquisition Devices, Data Transfer	334 – 337		Marking Gauges	202 – 203
	Data Processing System	335 – 337		Marking Ink	322
	Date Cables	334		Marking Tools, Marking Gauges	203 – 204
	Depth Caliper, Accessories	63		Master Squares	265 – 267
	Depth Gauges	78 – 79		Material Thickness Measuring Devices	286 – 288
	Depth Micrometers	114 – 115		Master-Line and Master-Line Plus	40 – 41
	Dial Indicators	151		Measurement Bridges	63
	• Analog Version	158 – 164		Measuring Beams	266
	• Digital Version	151 – 157		Measuring Force Testers	110
	• Accessories	166 – 170		Measuring Magnifiers	42, 325
	Digital Calipers	57 – 63		Measuring Pins	251 – 252
	Digital Depth Measuring Device	115		Measuring Pins and Accessories	251 – 252
	Digital Dial Indicators	151 – 157		Measuring Stands and Accessories	177 – 185
	Digital Inside Micrometers	120 – 125		Measuring Table Stands and Accessories	264 – 265, 268
	Digital Measuring Magnifier	42			

	Page		Page
Measuring Tables and Control Plates	186 – 187, 263	Spring Gauges	242
Measuring Tapes	46 – 47	Spring Joint Compasses	197
Measuring Tool Sets	83 – 84	Squares	215 – 225
Measuring Wedges	241	Stopwatches	324
Measuring Wheels	44	Straight Edges	35 – 37
Metal Etching Pens	204	Straightening Bars, - Plates and Stands	263 – 269
Micrometers	92	Stroboscopes	293
• Micrometer Heads	113	Stroke Counters	332
• Bore Micrometers	120 – 127	Support Sets	273
• Analog Bow Micrometers	99 – 109	Surface Plates and Accessories	268 – 269
• Digital Bow Micrometers	92 – 97	Surface Roughness Measuring Devices	309 – 310
• Wire Thickness Micrometers	107	T Tank Tapes	51
• Inside Micrometers	115 – 116	Test Indicators and Accessories	171 – 173
• Depth Micrometers	114 – 115	Test Weights for Scales	299
• Micrometer Holders	112	Testing and Straightening Plates, Accessories and Stands	268 – 269
• Micrometer Sets	93, 95, 102	Thermometers	305 – 306
• Micrometer Accessories	110 – 111	Thickness Gauge Foils	235
Micrometers for External Threads and Accessories	108	Thickness Gauges	132 – 135
Mitre Squares	223	Thread Plug Gauges	249
Moisture Meters	307	Tire pressure and tread depth measuring device	78 – 79, 330
Multimeters	302	U Universal Protractors	199
O Optical Parallels	257	V Vibration Meters	291
P Parallel Gauge Blocks, Sets and Accessories	253 – 262	Voltage Testers	300 – 301
Parallel Supports	273	W Welding Gauges	243
Piece Counters	333	Wire Thickness Micrometers	107
Pipe Welding Gauges	244	Wood Folding Rules	45
Piston Feeler Gauges	234	Wooden Storage Boxes	185
Plug Gauge Sets	246 – 250	Work Lamps	338
Pocket Measuring Tapes	46 – 47		
Prisms and Accessories	209 – 210		
Profile Gauges	245		
Protractors	200 – 202		
R Radius Gauges	237		
Refractometers	338		
Rugotest	309		
Rules	22 – 32, 34 – 36		
S Saw Teeth Setting Dial Indicators	132		
Scales	295		
• Hanging Scales	298 – 299		
• Crane Scales	298		
• Compact Scales	295 – 296		
• Package Scales	296 – 297		
• Platform Scales	296 – 297		
• Counting Scales	297		
• Accessories	299		
Screw Pitch Gauges	239		
Scribers	204 – 205		
Setting Devices	174		
Setting Gauges	111		
Setting Rings	247		
Single Gauge Blocks	253		
Solvents	322		
Sound Level Meters	308		

TERMS OF SALE, DELIVERY AND PAYMENT

1. GENERAL

The type and scope of delivery are determined in the order confirmation. The following terms of sale, delivery and payment are authoritative for each delivery to be made by us. We are not bound by the customer's purchasing conditions, even if we do not expressly contradict them. By placing an order, the buyer accepts our conditions without exception. Oral or telephone agreements require our written confirmation. Obvious errors in offers, order confirmations etc. are expressly reserved and can be taken into account at any time. We are entitled to process the data received about buyers with regard to the business relationship or in connection with this - regardless of whether these come from the buyer himself or from third parties - within the meaning of the Federal Data Protection Act.

2. OFFERS

Our offers are non-binding regard to price, quantity, delivery time and delivery options. An order is deemed to have been placed when we have confirmed it in writing. Changes to the goods in terms of appearance or technology are permitted without special notice, provided that the function of the item is not impaired. Article images used in the catalogue may differ from the original article. No liability is assumed for any printing errors, product changes due to technical developments and/or model changes. For printing reasons, the colours in the catalogue may also differ from the original colour of the products.

3. SPECIAL PRODUCTION

In the case of custom-made products, excess or short deliveries of up to 10 % are permitted. This also includes series parts that are to be specially marked at the express request of the customer. The customer cannot withdraw from the order after the order has been confirmed. We do not take back specially manufactured or marked goods.

4. PRICES, DELIVERY BASE AND PACKAGING

All prices mentioned are non-binding and are in EURO per piece or in accordance with the specified quantity units from the price list plus statutory VAT, ex works, excluding packaging. A shipping service of € 7.90 within Germany is charged for each delivery. For freight forwarded goods or deliveries outside of Germany, the shipping service are billed separately. We reserve the right to correct the prices if there are changes in the basic costs, such as raw material, alloy surcharges, energy, wages, etc. by the day of delivery. In the case of special packaging instructions by the customer, the associated additional costs will be charged. Packaging will not be taken back.

5. DELIVERY

Unless otherwise agreed in writing, delivery takes place at the expense and risk of the buyer. The goods are dispatched by a carrier of our choice, unless otherwise agreed. We reserve the right to carry out orders in partial deliveries. In case of goods being taken back as a gesture of goodwill, we are entitled to charge a restocking fee of 15 % of the value of the goods taken back, at least € 15.00 and most € 250.00.

6. DELIVERY TIME, DELIVERY DEADLINES

The delivery time begins after receipt of all information required for the execution of the order. Agreed delivery times are appropriately extended in the event of unforeseen events that are beyond our control, such as strikes, lockouts, operational disruptions, delays in the delivery of primary material, regardless of whether these events occur with us or with our supplier. We are not responsible for such circumstances even if we are already in default. If they occur, both parties are entitled to withdraw from the contract. No claims can be made for late delivery.

7. COMPLAINTS

Obvious defects must be reported in writing and specified within 10 days of receipt of the goods.

8. WARRANTY

For all Vogel Germany measuring tools that are rendered unusable due to proven material or manufacturing defects, we will replace them within one year of delivery. This free replacement service is excluded if the tools have become unusable due to natural wear and tear or improper handling.

9. DISCLAIMER

We do not guarantee the suitability of our products for the purpose intended by the customer. We do not accept any liability for damage caused by unsuitable or improper use, commissioning by the customer or third parties or for natural wear and tear. Any claims for damages, irrespective of the legal reason, and in particular liability through tort (product liability) are excluded - as far as legally permissible.

10. PAYMENT

The payment terms valid on the day of delivery are decisive for the settlement of our invoices. The terms of payment and payment deadlines stated on the invoice apply. We reserve the right to request advance payment. Payments from abroad must be made free of bank charges. Discounts based on specified conditions can only be recognized if no other due invoices are open. The purchaser is in default of payment upon receipt of the first reminder or without a reminder 30 days after the due date and receipt of an invoice in accordance with § 286 Abs.3 German Civil Code (BGB). In the event of default, we are entitled to default interest in accordance with § 286 of the German Civil Code (BGB), subject to proof of further damage caused by default.

11. RETENTION OF TITLE

We reserve title to all goods delivered by us until the buyer has paid all claims arising from the business relationship, including future claims. The buyer is entitled to resell the reserved goods in the ordinary course of business. In the event of a resale, the buyer has to reserve ownership of the sold goods to his customer under the same conditions. The buyer already now assigns to us the purchase price claim to which he is entitled from the resale against the customer.

12. PLACE OF COMPETENCY, JURISDICTION, APPLICABLE LAW

The place of competency is Kevelaer (Germany). The place of jurisdiction for all disputes arising from our legal relationship with the customer is Kevelaer (Germany). However, we are also entitled to take legal action at the customer's headquarters. German law applies and, in exceptional cases, UN sales law

13. OTHER CLAIMS

Other claims - for whatever reason - remain excluded unless they have been expressly confirmed to the buyer in writing

14. OTHERS

If individual regulations of these terms of sales, delivery and payment are or become ineffective, this shall not affect the validity of the remaining regulations.




Measuring Solutions

www.vogel-germany.de



Measuring Solutions

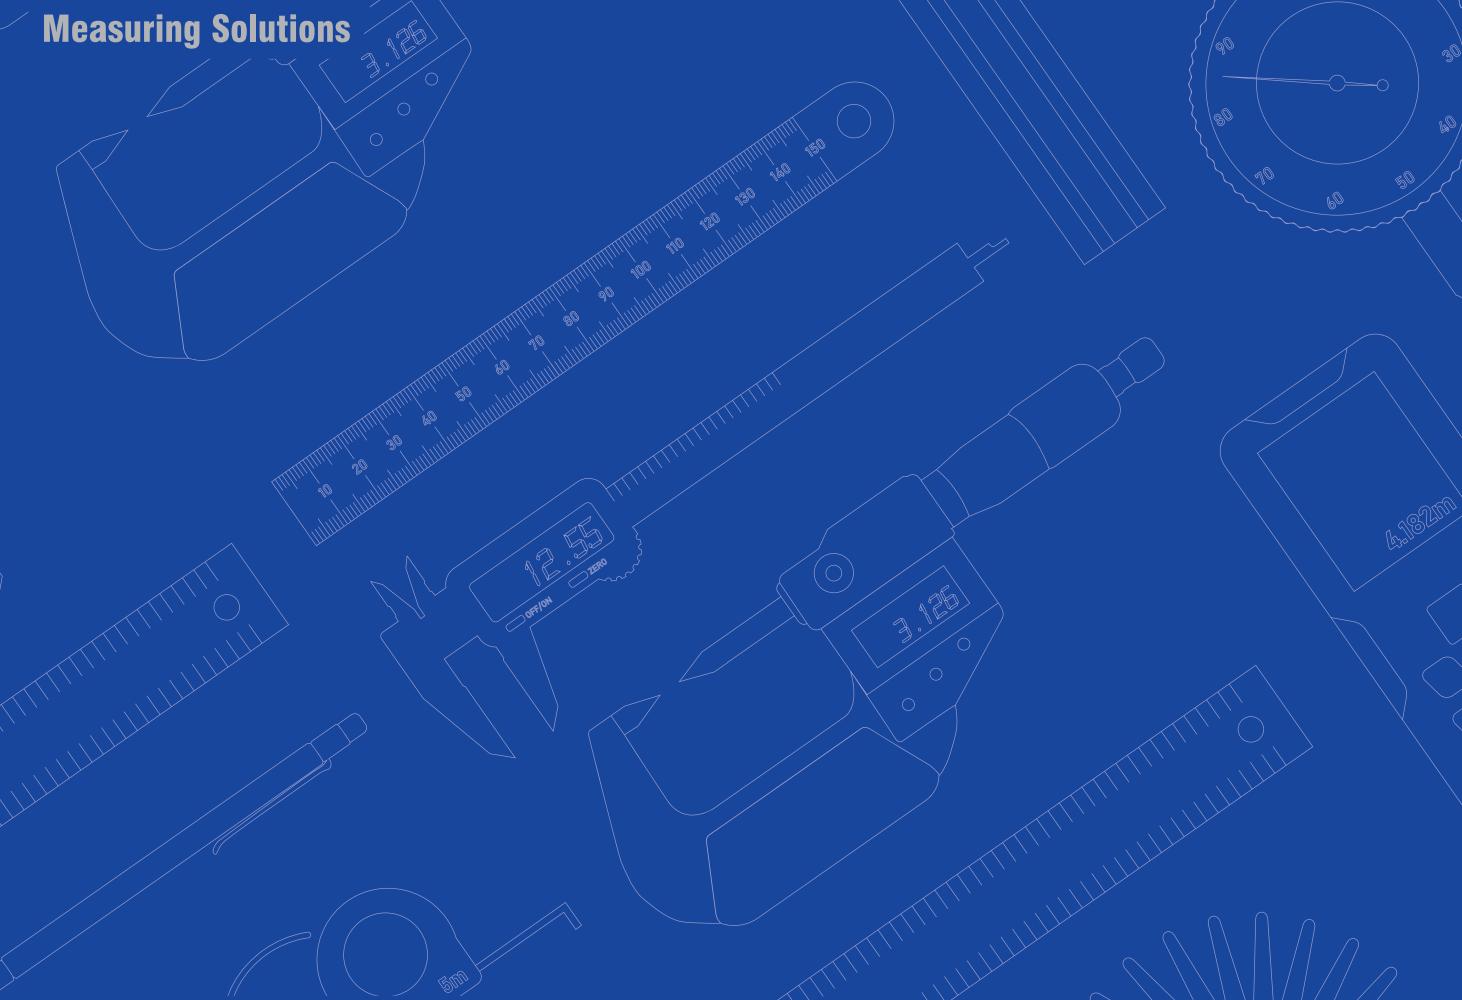

Our known sales, delivery and payment conditions apply exclusively.
All prices in this catalogue are understood, unless otherwise stated in the offer, ex warehouse,
strictly net, plus statutory VAT, packaging, insurance and transportation costs.

Vogel Germany GmbH & Co KG

Ossenpass 4
47623 Kevelaer
Germany

Phone: 0049 2832 9239-0
Fax: 0049 2832 3621
Mail: info@vogel-germany.de
Web: www.vogel-germany.de

VAT ID No.: DE 813587158
WEEE Reg. No.: DE 68792696
GLN No.: 40 10873 00000 3
Interseroh Manufacturer No.: 113216